


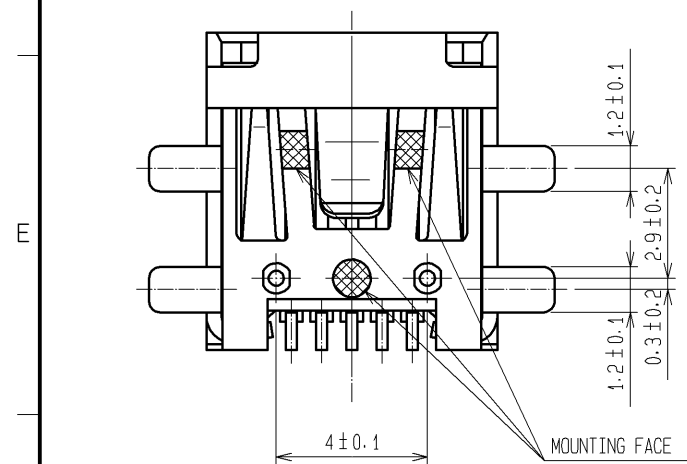
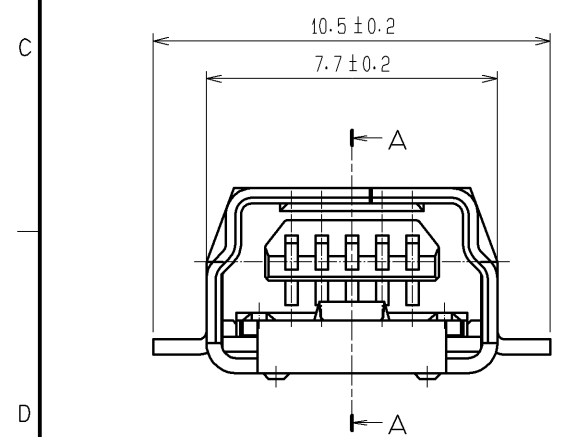
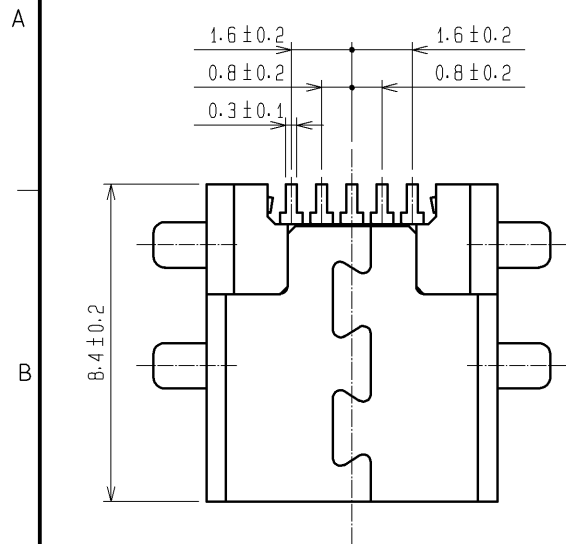


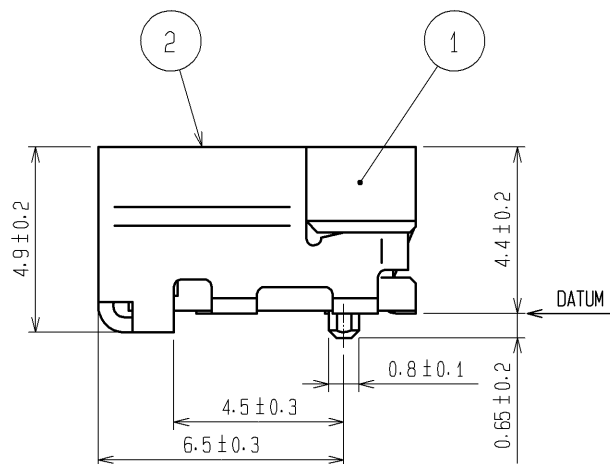


MATING FIGURE

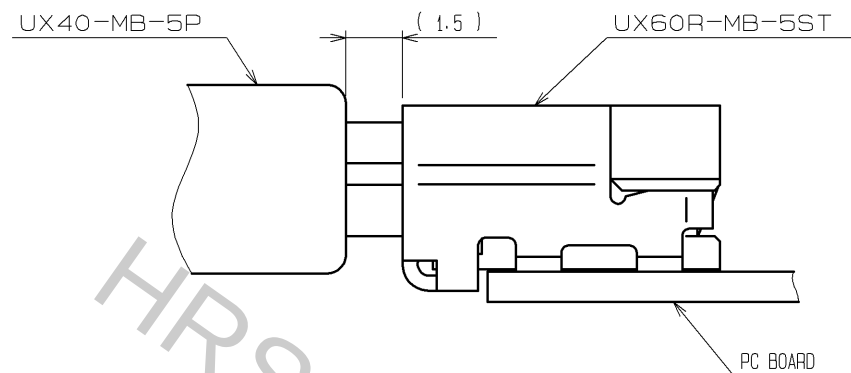

A-A

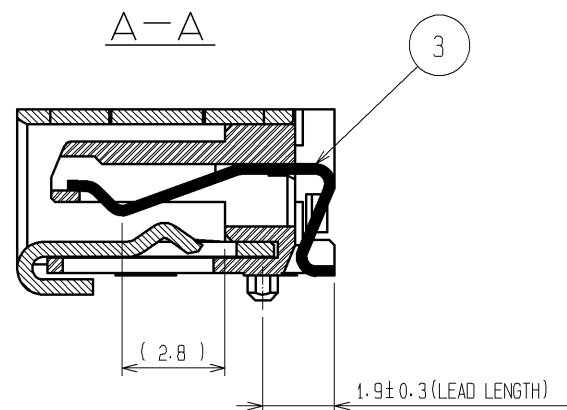

RECOMMENDED PCB PATTERN

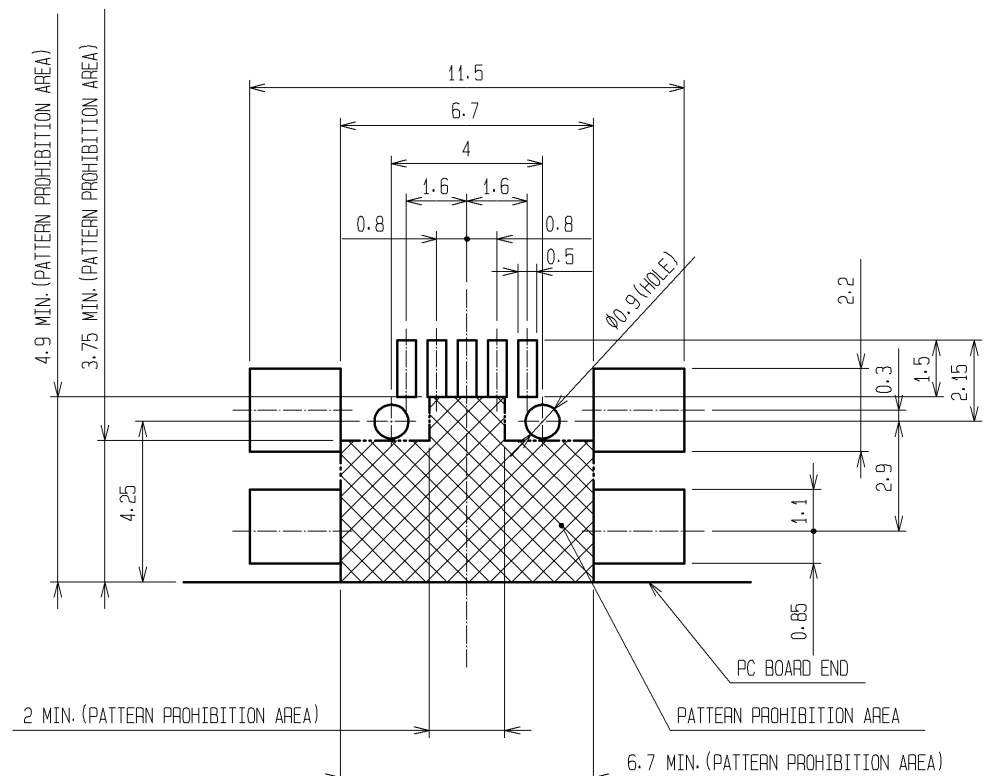

- NOTES 1. INTERFACE DIMENSIONS CONFORM TO USB2.0 STANDARDS.
2. ALL 9 LEADS(5 PINS + 4 METAL FITTINGS)SMT AND CO-PLANARITY SHALL BE AS FOLLOWS.

SMT AGAINST DATUM	CO-PLANARITY
0±0.075	WITHIN 0.1


3. PER REEL:900 PIECES.

2	BRASS	NICKEL PLATED 1 μm + TIN PLATED 2 μm	1	5	PE	△	
1	POLYAMIDE	BLACK UL94V-0		4	PS		
NO.	MATERIAL	FINISH, REMARKS	NO.	3	PHOSPHOR BRONZE		CONTACT AREA:NICKEL PLATED 1.25 μm + GOLD PLATED 0.75 μm MOUNTING AREA:NICKEL PLATED 1.25 μm + TIN-COPPER PLATED 1 μm OTHERS AREA:NICKEL PLATED 1.25 μm
UNITS mm							
SCALE 5 : 1			COUNT 3	DESCRIPTION OF REVISIONS DIS-E-003848	DESIGNED TA. TORIHARA	CHECKED RI. TAKAYASU	DATE 11.07.15
				APPROVED : A0. SUZUKI 05.01.05			
				CHECKED : MR. NAKAMURA 05.01.05			
				DESIGNED : HK. TANAKA 05.01.05			
				DRAWN : HK. TANAKA 05.01.05			
					DRAWING NO. EDC3-124565-00		
					PART NO. UX60R-MB-5ST		
					CODE NO. CL240-0008-8-00		
							1/2




△ DRAWING FOR PACKING

UNREELING DIRECTION →


PACKAGING CONDITION(FREE)

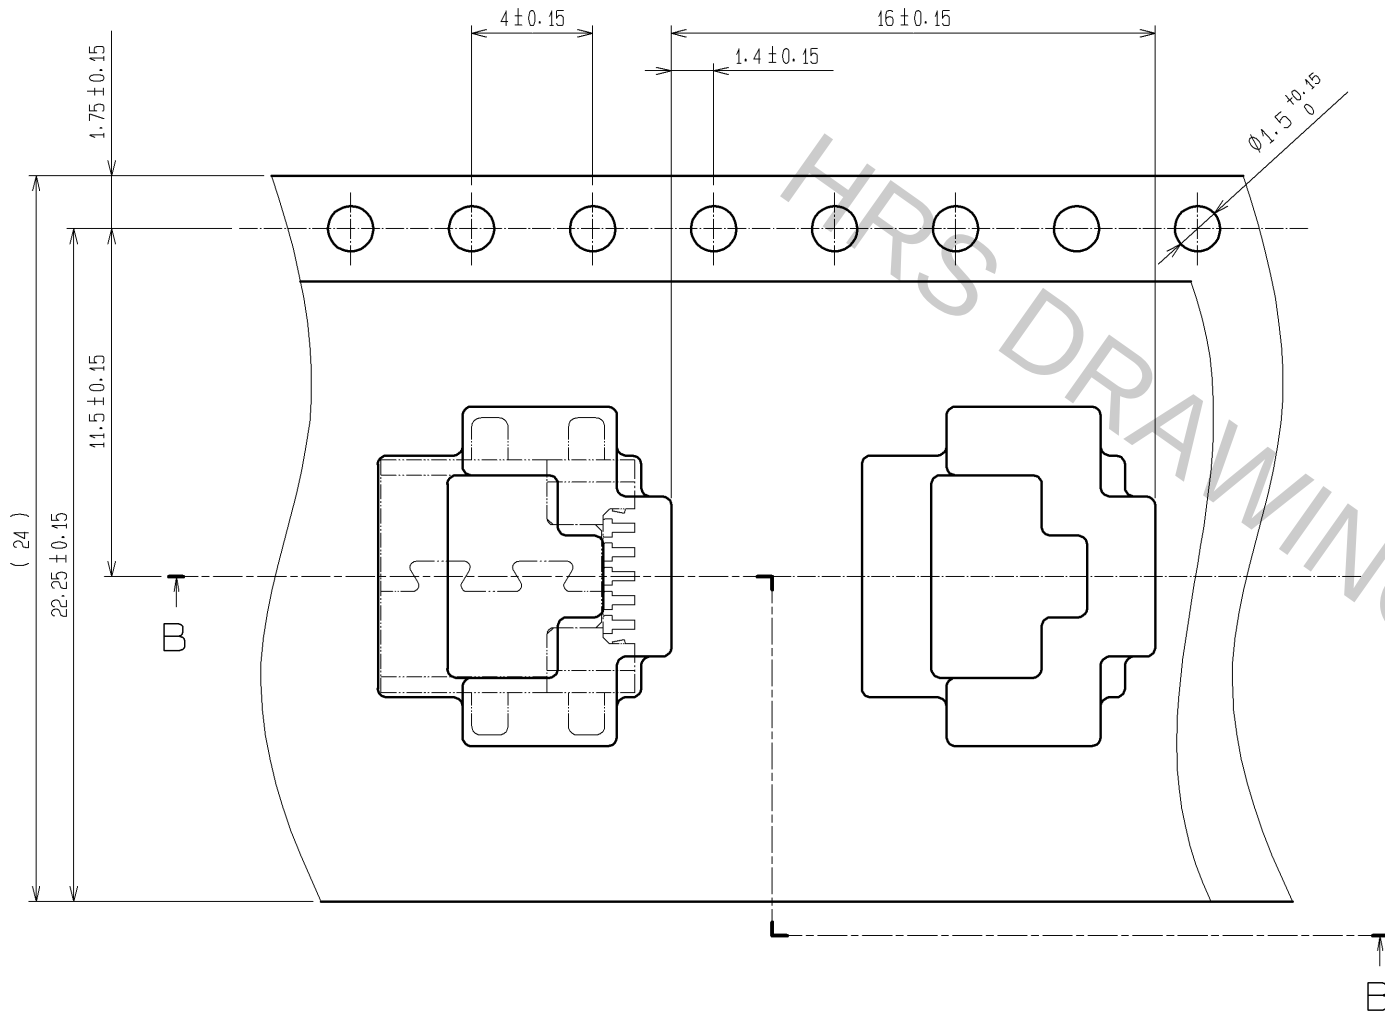

B-B

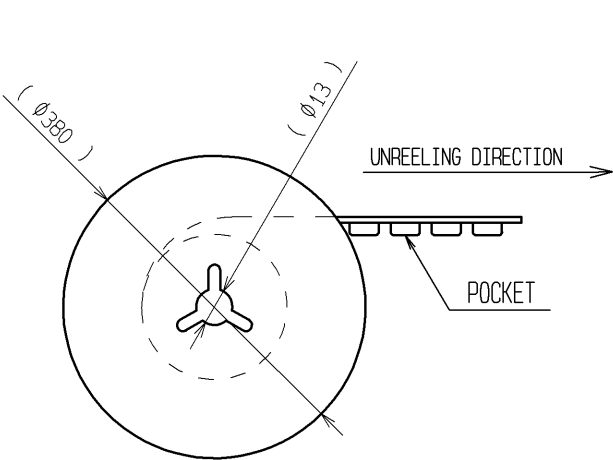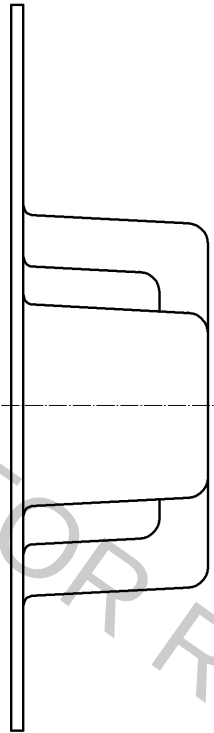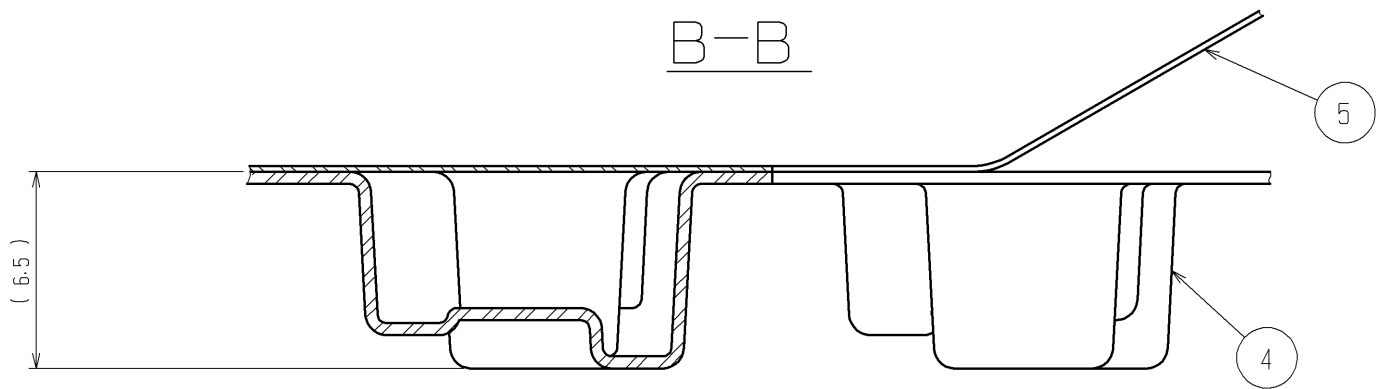

POCKET

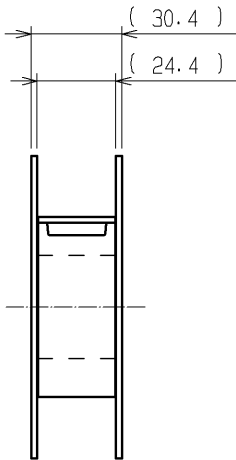

HRS

DRAWING NO.	EDC3-124565-00
PART NO.	UX60R-MB-5ST
CODE NO.	CL240-0008-8-00

△ 2/2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Hirose Electric:

[UX60SC-MB-5ST\(80\)](#) [UX60-MB-5ST](#) [UX60-MB-5S8](#) [UX60-MB-5S8\(01\)](#) [UX60A-MB-5ST](#) [UX60RA-MB-5ST](#)
[UX60R-MB-5ST](#) [UX20-MB-5P](#) [UX60SC-MB-5ST](#) [UX60SC-MB-5ST\(01\)](#) [UX60SC-MB-5S8](#) [UX60SC-MB-5S8\(80\)](#)
[UX60SC-MB-5S8\(85\)](#) [UX60SC-MB-5ST\(85\)](#) [UX60SE-MBR-5S9](#)