


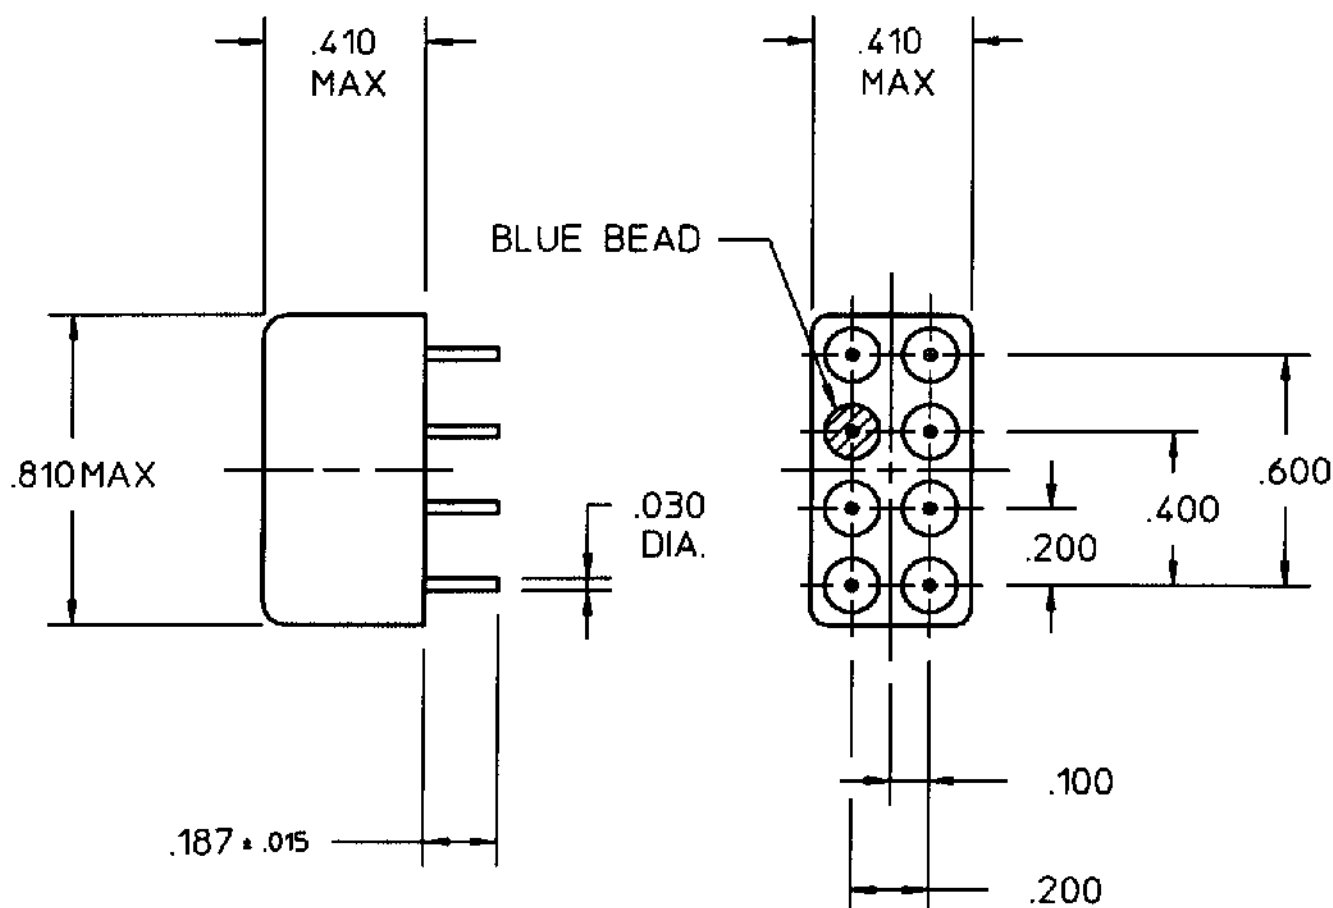

COIL: @ +25 °C

RESISTANCE 518 OHMS ± 10%

NOMINAL VOLTAGE 12.0 VDC

MUST OPERATE 7.2 VDC

MUST RELEASE 0.7 VDC

ENVIRONMENT:

VIBRATION 10 CPS TO 2000 CPS @ 20 g's

SHOCK 100 g's 6 MS. DURATION


TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 5 MS MAX.

RELEASE TIME 3 MS MAX.

CONTACT BOUNCE 3 MS MAX.

CUSTOMER DATA SHEET

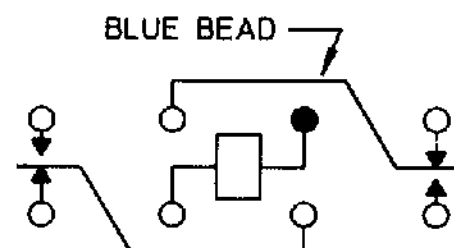

CONTACT RATING: 2 AMPS 30 VDC
RESISTIVE 100,000 OPERATIONS

DR. R.B. 12/4/91 CK 12/5/91

**COMMUNICATIONS
INSTRUMENTS, INC.**

CUST. Hi-G
CUST. NO. 2KA-2A-112

TYPE 'HMS' RELAY

HMS1201S29