


THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT - By - ALL RIGHTS RESERVED.


LOC	DIST	REVISIONS				
G	14	P	LTR	DESCRIPTION	DATE	APVD
			A	REVISED PER ECO-13-014534	13SEP2013	KH DR

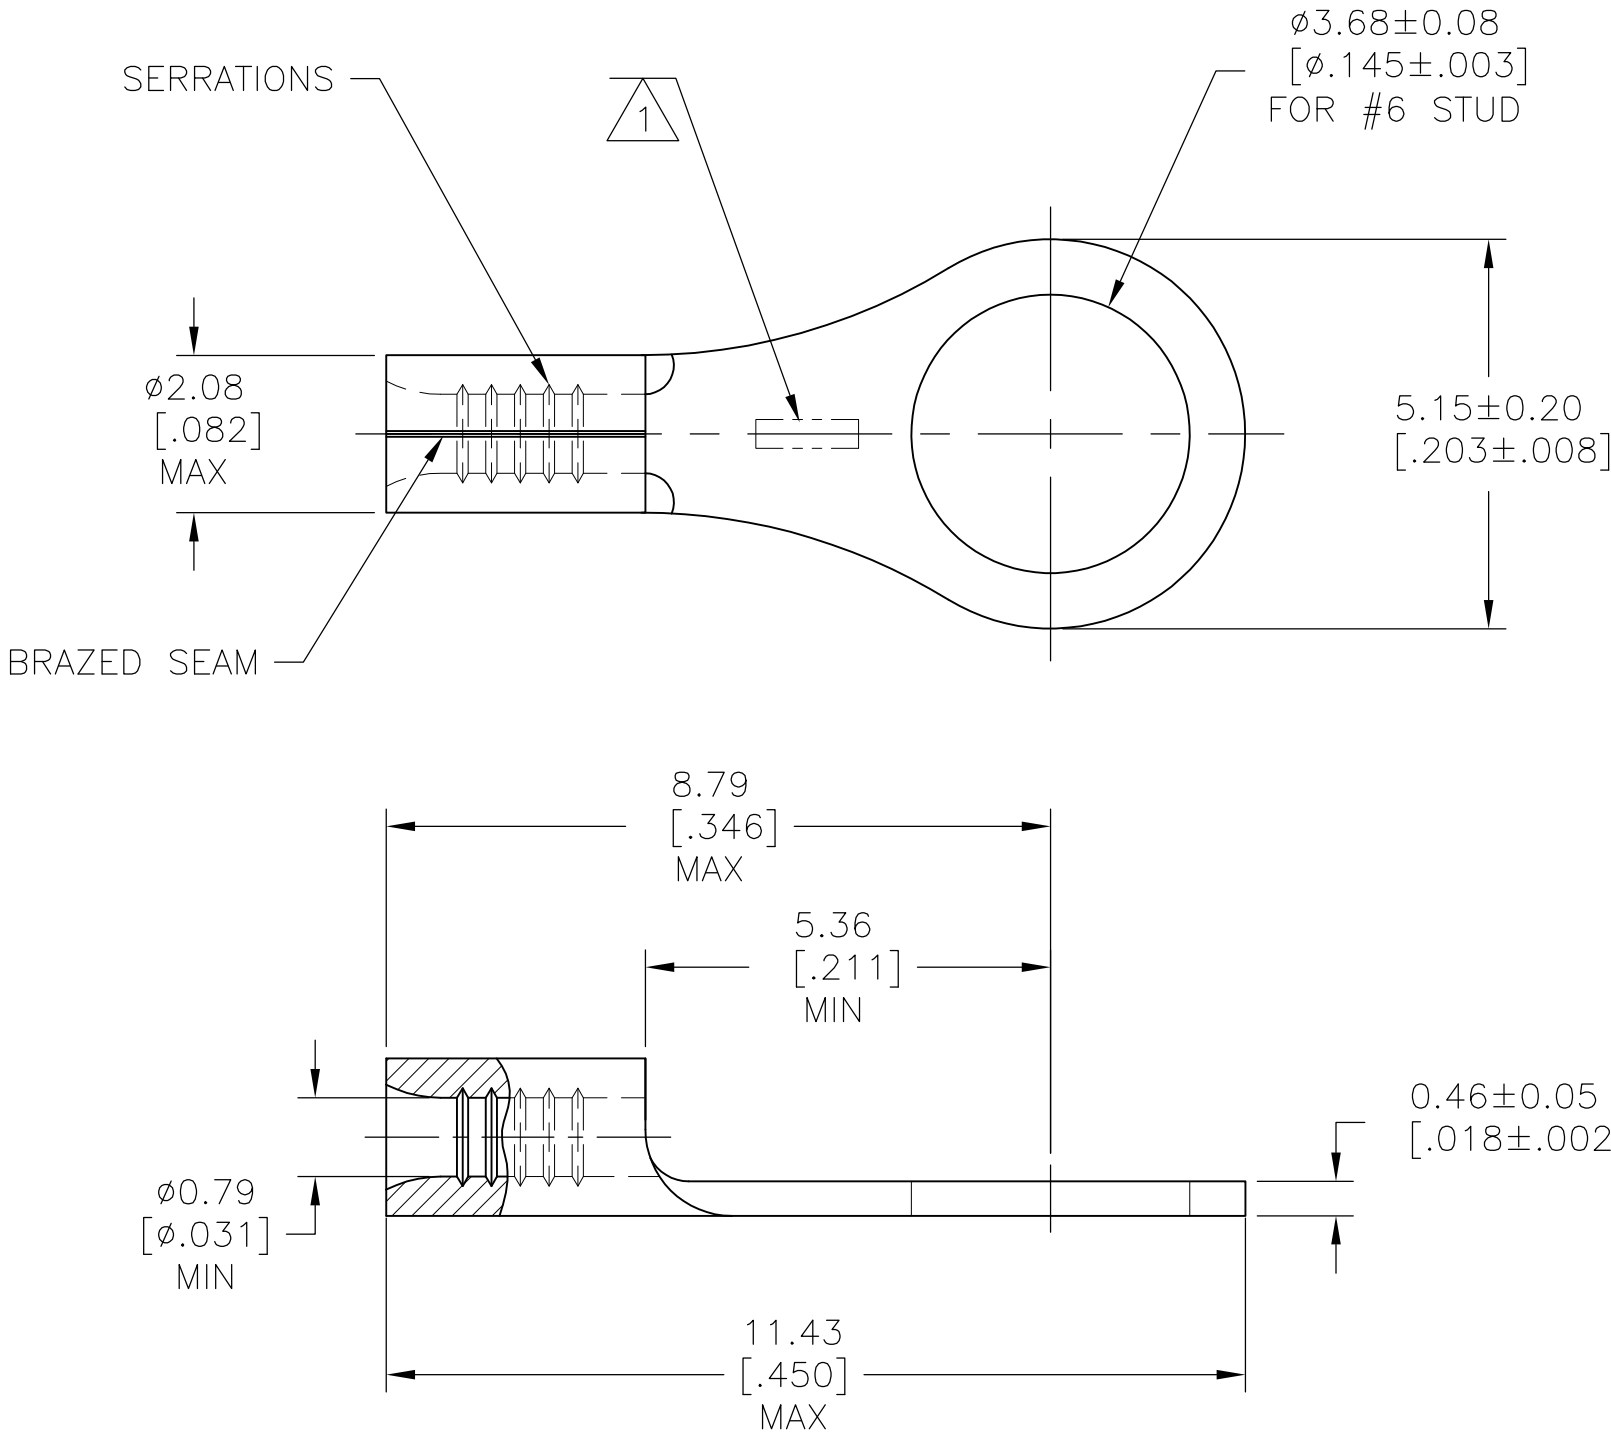

- 1
- STAMP AMP APPROX AS SHOWN
- 2
- NICKEL PLATE 0.00762[.000300] MIN EXT THICK PER SAE AMS QQ-N-290

AMP
WIRE RANGE

26-22 AWG
STRANDED

				1000		LOOSE PIECE		1958423-1	
				QTY		PACKAGING		PART NO	
AMP INCORPORATED CUSTOMER SERVICE SYSTEMS		MAX RECOMMENDED OPERATING TEMPERATURE: 343°C[650°F]		THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN KIRAN HOLAL 21AUG12		TE Connectivity	
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS		VOLTAGE RATING: NOT APPLICABLE		DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:			
						APVD ROHDE DANIEL 21AUG12		NAME	
FOR APPLICATION TOOLING INFORMATION		WIRE CROSS SECTIONAL AREA RANGE: 0.1-0.41mm ² [202-810] CIR MILS STRANDED				PRODUCT SPEC		TERMINAL, RING TONGUE, STRATO-THERM, HEAT RESISTANT	
				APPLICATION SPEC					
FOR ORDER ENTRY		THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		MATERIAL		FINISH		SIZE	
				COPPER PER ASTM B-152 ANNEALED				CAGE CODE	
						WEIGHT		DRAWING NO	
						—		RESTRICTED TO	
						CUSTOMER DRAWING		—	
								SCALE	
								10:1	
								SHEET	
								1 OF 1	
								REV	
								A	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1958423-1](#)