

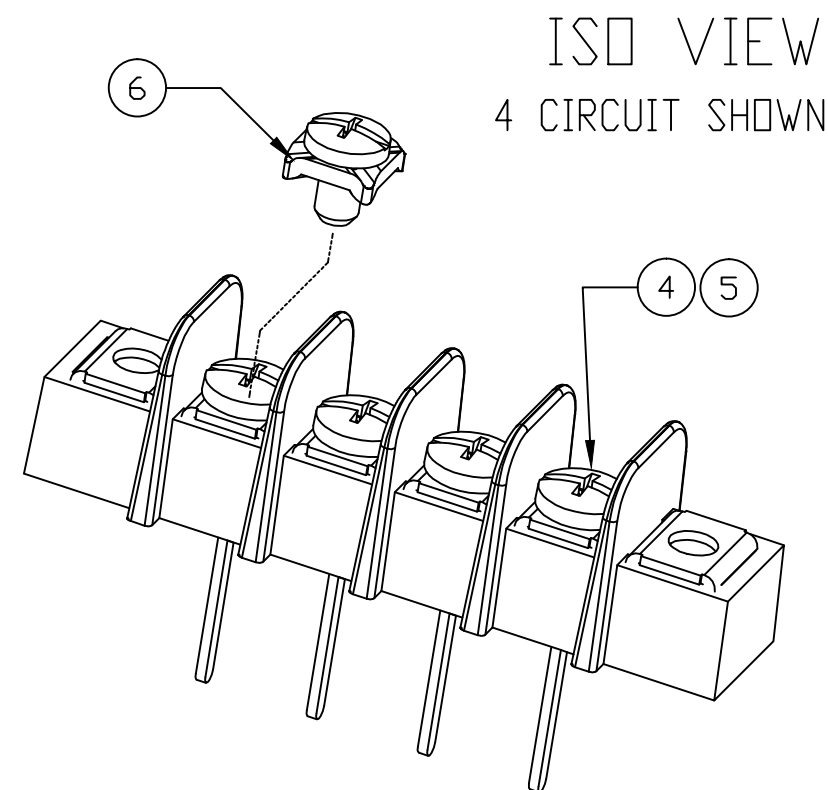
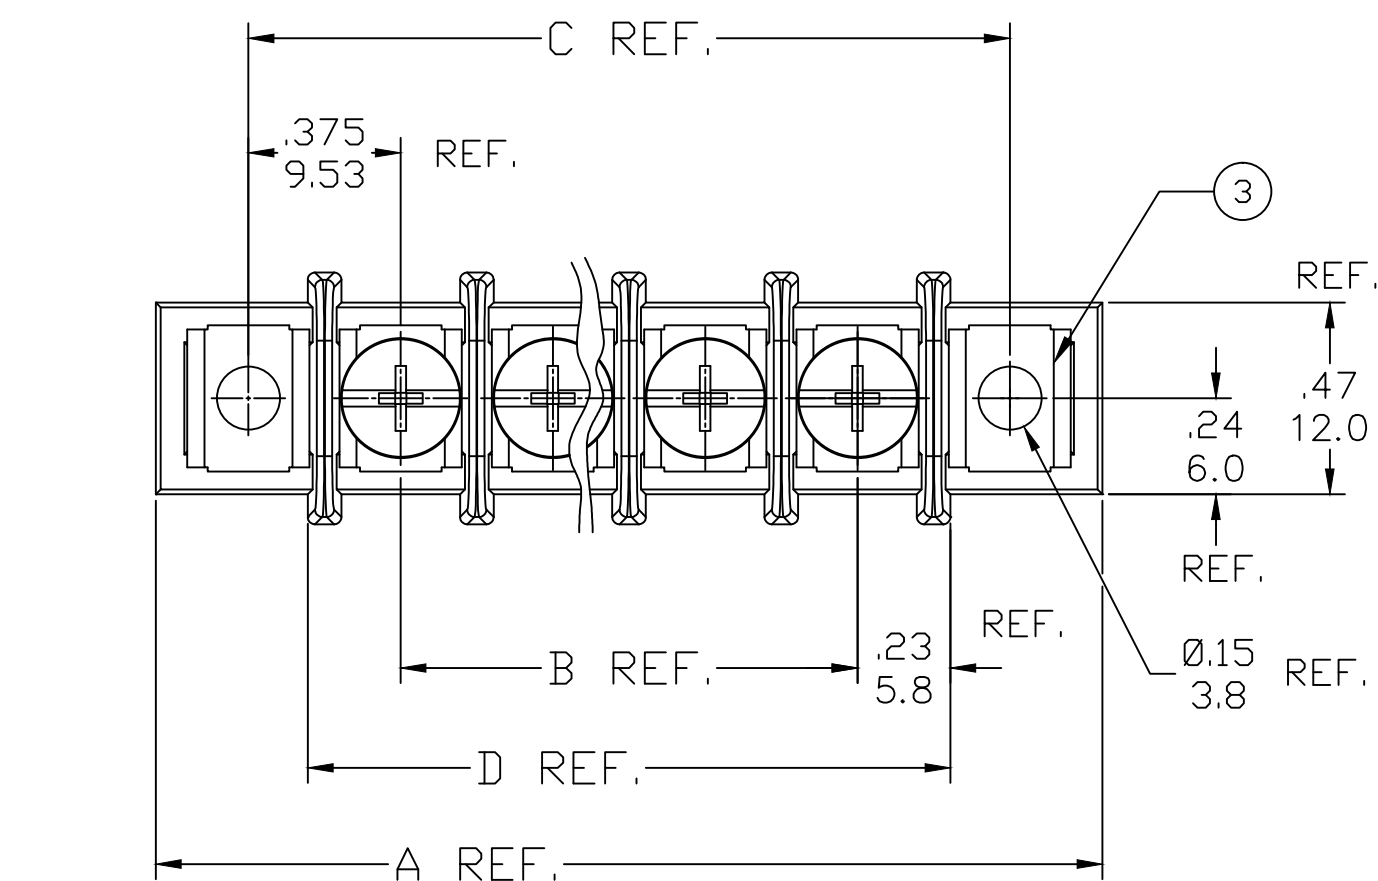


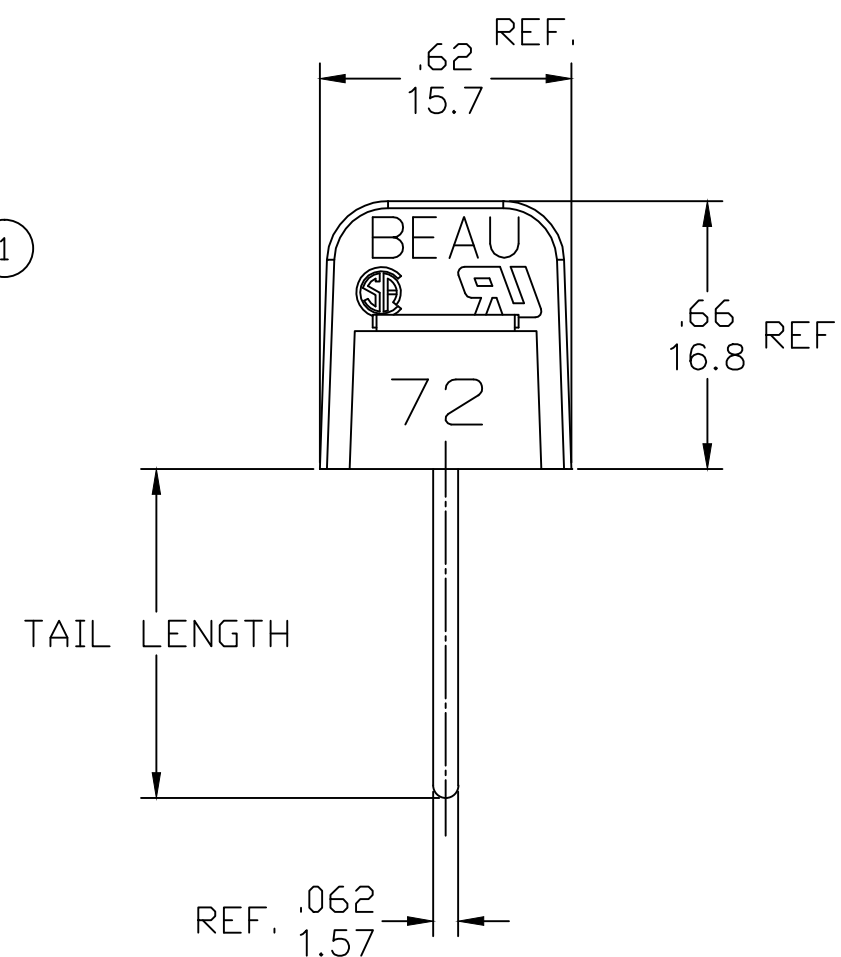

PART NUMBER DATA								
CIRCUITS	A IN mm		B IN mm		C IN mm		D IN mm	
2	1.58	40.2	.375	9.52	1.125	28.58	.83	21.1
3	1.96	49.7	.750	19.05	1.500	38.10	1.21	30.7
4	2.33	59.2	1.125	28.58	1.875	47.63	1.58	40.2
5	2.71	68.7	1.500	38.10	2.250	57.15	1.96	49.7
6	3.08	78.3	1.875	47.63	2.625	66.68	2.33	59.2
7	3.46	87.8	2.250	57.15	3.000	76.20	2.71	68.8
8	3.83	97.3	2.625	66.68	3.375	85.73	3.08	78.3
9	4.21	106.8	3.000	76.20	3.750	95.25	3.46	87.8
10	4.58	116.4	3.375	85.73	4.125	104.78	3.83	97.3
11	4.96	125.9	3.750	95.25	4.500	114.30	4.21	106.9
12	5.33	135.4	4.125	104.78	4.875	123.83	4.58	116.4
13	5.71	144.9	4.500	114.30	5.250	133.35	4.96	125.9
14	6.08	154.5	4.875	123.83	5.625	142.88	5.33	135.4
15	6.46	164.0	5.250	133.35	6.000	152.40	5.71	145.0
16	6.83	173.5	5.625	142.88	6.375	161.93	6.08	154.5
17	7.21	183.0	6.000	152.40	6.750	171.45	6.46	164.0
18	7.58	192.6	6.375	161.93	7.125	180.98	6.83	173.5
19	7.96	202.1	6.750	171.45	7.500	190.50	7.21	183.1
20	8.33	211.6	7.125	180.98	7.875	200.03	7.58	192.6
21	8.71	221.1	7.500	190.50	8.250	209.55	7.96	202.1
22	9.08	230.7	7.875	200.03	8.625	219.08	8.33	211.6
23	9.46	240.2	8.250	209.55	9.000	228.60	8.71	221.2
24	9.83	249.7	8.625	219.08	9.375	238.13	9.08	230.7
25	10.21	259.2	9.000	228.60	9.750	247.65	9.46	240.2
26	10.58	268.8	9.375	238.13	10.125	257.18	9.83	249.7

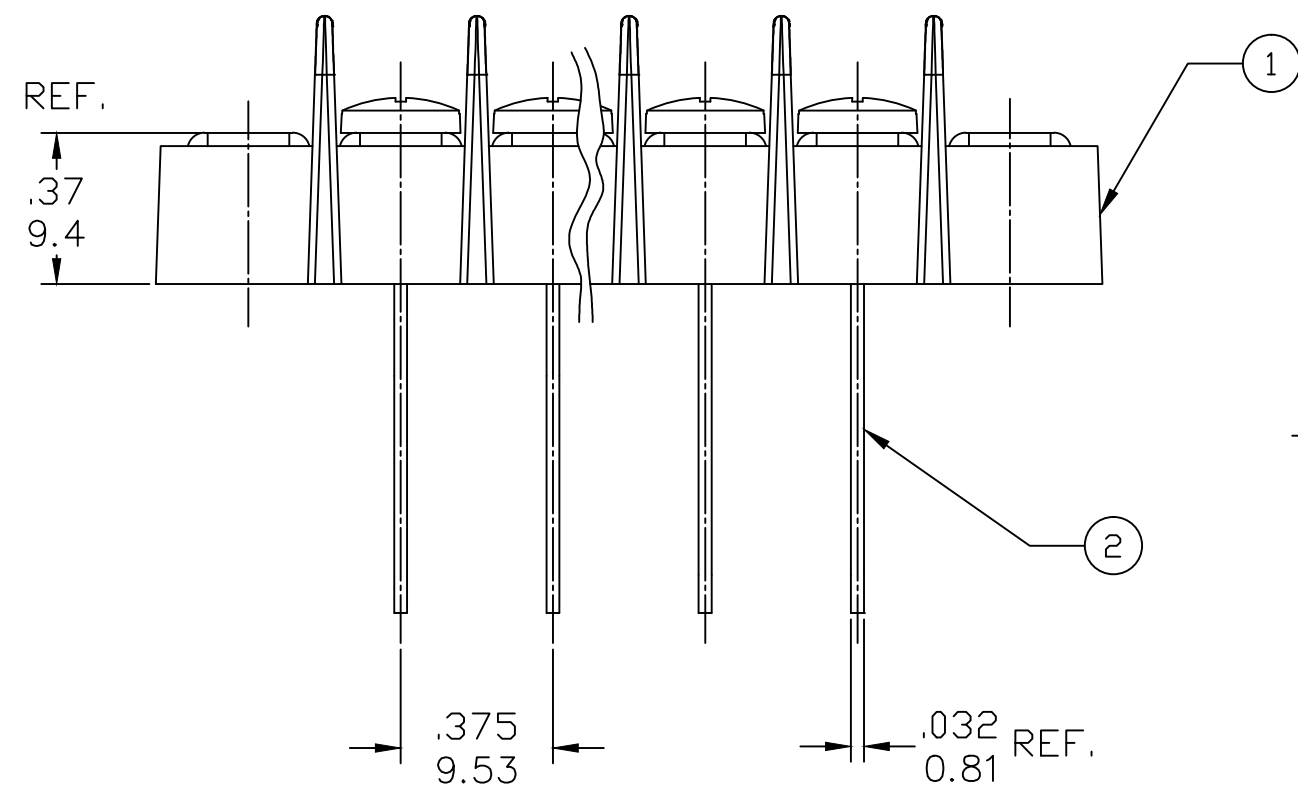

PART NUMBER LEGEND

ENG NO. 72 7 XX XX-XX

SERIES ———

STYLE (WW) ———

POLES: SEE CHART ———

TAIL LENGTH

- 47=.47/11.9 (STD)
- 55=.54/13.7
- 75=.75/19.1
- 81=.81/20.6

OPTION:

- 49 (BRASS PHIL-SLOT SCREW)
- 50 (SCREW WITH CLAMP WASHER)

P/N SERIES: 3872122XX= STD

P/N SERIES: 3872128XX= -49

P/N SERIES: 3872134XX= -50

P/N SERIES: 38729____= -81

NOTES:

1. MATERIAL: SEE TABLE
2. ASSEMBLY MUST MEET BEAU WORKMANSHIP STANDARD ES-19900-059
3. PRODUCT SPECIFICATION: PS-38710-001
4. SEE SAP BOM FOR COMPONENT PART NUMBERS
5. "XX" REFERS TO THE QUANTITY OF CIRCUITS

6	XX	#6-32 PH/SLOTTED SCREW (OPTION -50)	380010099	2504-9201-C220
5	XX	#6-32 PH/SLOTTED SCREW (OPTION -49)	380010058	1804-9101-A120
4	XX	#6-32 PH/SLOTTED SCREW (STD)	380010092	2504-9101-C220
3	2	MOUNTING PLATE	380021308	7204-7201-A120
2	XX	TERMINAL	380021279	7204-3411-A260
1	1	BARRIER TERMINAL STRIP	38728_----	7200-XX02-V000
ITEM	QTY	DESCRIPTION	MATERIAL NO.	ENGINEERING NO.

RELEASED EC NO: IPG2015-0118 DRWN: RSTONE 2014/07/18 CHK'D: BARDEN 2014/07/23 APPR: JFMURPHY 2014/08/02 A	DESCRIPTION	QUALITY SYMBOL =0 =0	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE IN/MM		SCALE ---	DESIGN UNITS INCH	THIRD ANGLE PROJECTION			
				mm	INCH	DRAWN BY	DATE	TITLE SR BTS WW ASSY .375 PITCH WITH MOUNTING ENDS					
			4 PLACES	±---	±---	RSTONE	2014/07/18						
			3 PLACES	±---	±.005	CHECKED BY	DATE						
			2 PLACES	±0.13	±.01	----	----						
			1 PLACE	±0.3	±---	APPROVED BY	DATE	molex MOLEX INCORPORATED					
			ANGULAR ±---°			JFMURPHY	2014/08/02						
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			MATERIAL NO. SEE PART LEGEND		DOCUMENT NO. E-38721-010				SHEET NO. 1 OF 1	
						SIZE C	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						

