


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.05.20	阿树




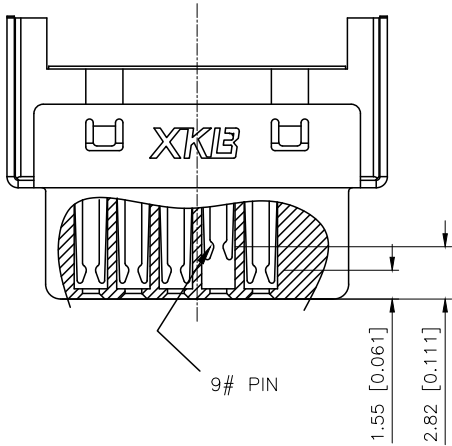


DOR02-15-X

MARK
0:NON MARK
5: +D/C X:
XKB+D/C

MATERIAL:
1. HOUSING: THERMOPLASTIC, GLASS FIBER FILLED.
UL 94V-0 RATED.
2. SPACER: THERMOPLASTIC, GLASS FIBER FILLED.
UL 94V-0 RATED.
3. CONTACT: C5191R-H (t=0.30mm).
4. FRONT SHIELD: SPCC (t=0.40mm).
FINISH:
CONTACT: UNDER PLATED 50u" MIN. NICKEL ALLOVER 100u" MIN.
MATTE TIN IN SOLDERING AREA
GOLD PLATED IN CONTACT AREA.
FRONT SHIELD: NICKEL PLATED WITH 100u"THICK.

HOUSING COLOR PACKAGE
1:BLACK O:TRAY
CONTACT GOLD PLATED SHELL PLATING
A:G/F+MATTE TIN N:NICKEL

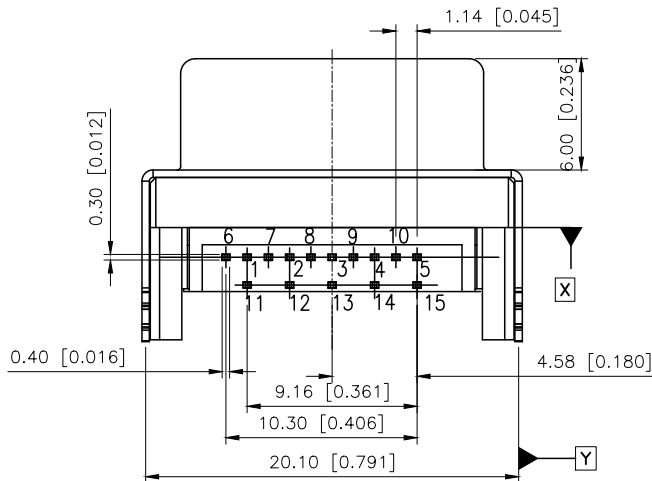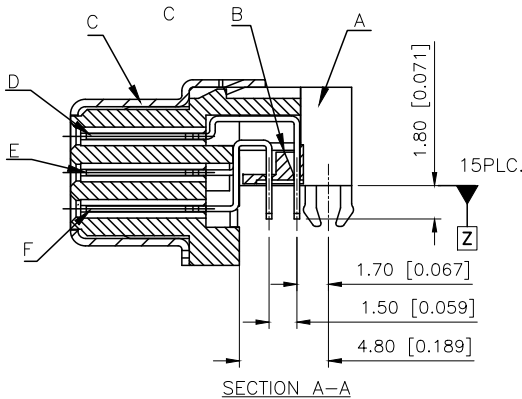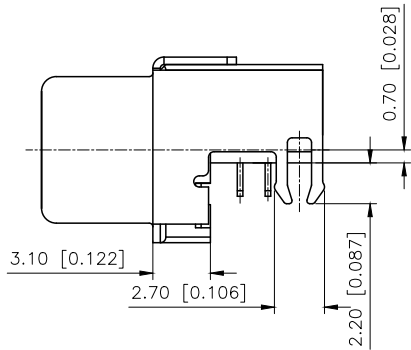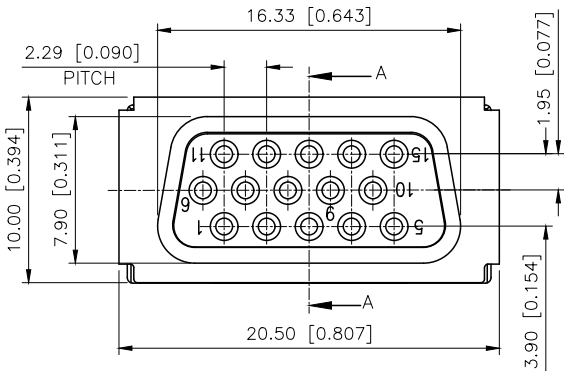

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:
CHECKED		UNIT: mm/in
APPROVED		SIZE: A4

MODEL TYPE: DB CONNECTOR	PART NO.: DOR02-15-X	DWG NO.:
-----------------------------	-------------------------	----------

SCALE N/A	PAGE 1/1	REVISION A1
--------------	-------------	----------------