
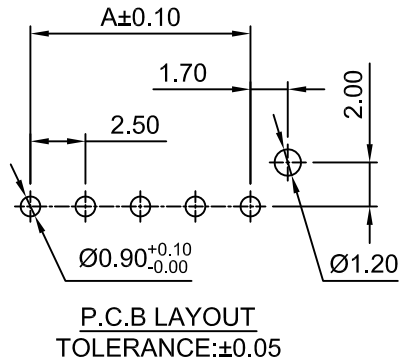


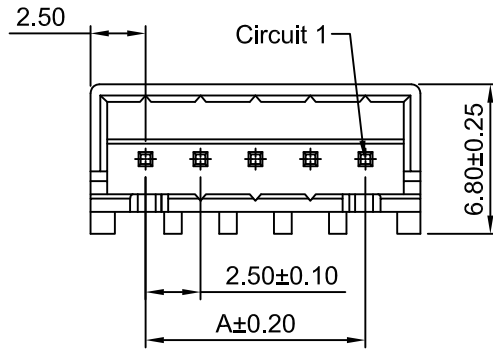

Ordering Information:

A2501WV-F-XP-H - ** - ***

1. Part NO.

2. Material:

(Blank): Nylon 66, UL94V-0 (White)

GWT: Nylon 66, UL94V-0 (Beige),

IEC 60335-1, 5th Edition

Glow Wire Capable

3. Color:

(Blank): White

YL: Yellow BK: Black


BL: Blue RD: Red

GN: Green OR: Orange

IV: Ivory GY: Gray

BR: Brown VI: Violet

PK: Pink

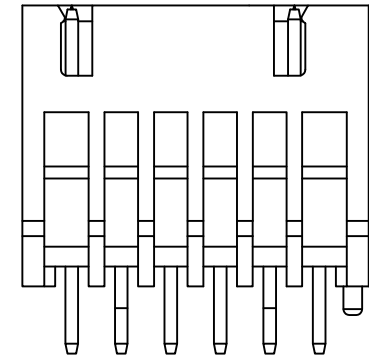

6P~13P

SPECIFICATIONS:

Current Rating: 3A AC, DC

Voltage Rating: 250V AC, DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min




Withstanding Voltage: 800V AC/minute

Pin Material: Brass/Tin over Nickel

Material: Nylon 66, UL94V-0 (White)

Ordering Information & Dimensions

Part NO.	Dimensions (mm)		
	A	B	C
A2501WV-F-2P-H	2.50	7.50	---
A2501WV-F-3P-H	5.00	10.00	3.00
A2501WV-F-4P-H	7.50	12.50	5.50
A2501WV-F-5P-H	10.00	15.00	8.00
A2501WV-F-6P-H	12.50	17.50	10.50
A2501WV-F-7P-H	15.00	20.00	13.00
A2501WV-F-8P-H	17.50	22.50	15.50
A2501WV-F-9P-H	20.00	25.00	18.00
A2501WV-F-10P-H	22.50	27.50	20.50
A2501WV-F-11P-H	25.00	30.00	23.00
A2501WV-F-12P-H	27.50	32.50	25.50
A2501WV-F-13P-H	30.00	35.00	28.00

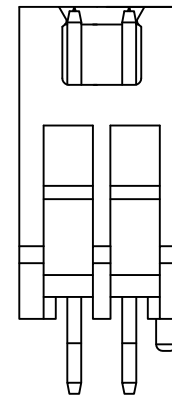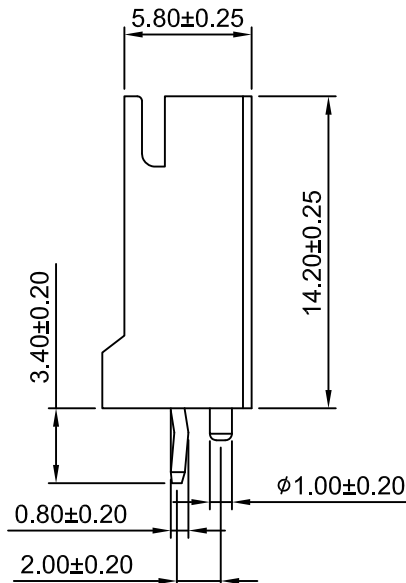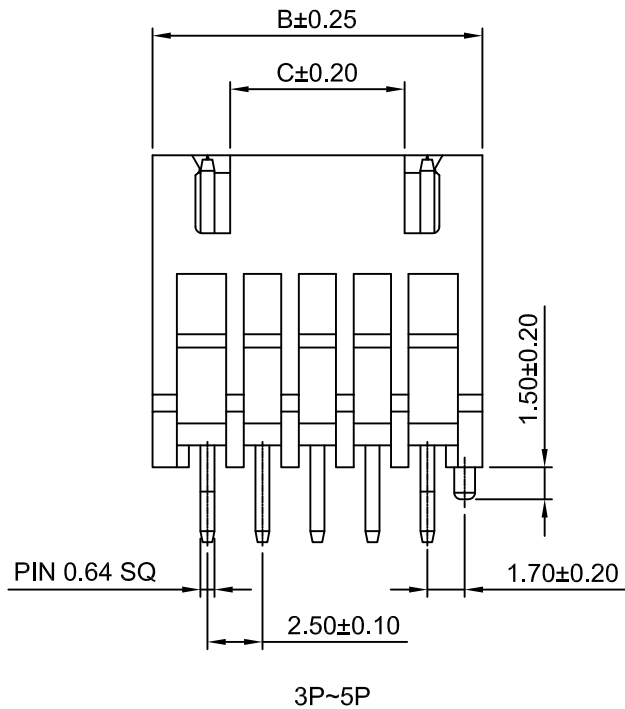

2P

CJTconn

CHANGJIANG CONNECTORS CO., LTD.

Unit: mm Scale: 3:1 Sheet: 1 of 1

DRWN: CHKD: APPR: Chengbiao Ye Diankui Wan Jack Yin

General Tolerances: THIRD ANGLE PROJECTION

x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°

TITLE: 2.50mm PITCH 180° WAFER

DRAWING NO. A2501WV-F-XP-H

REV A4

REV	DESCRIPTION	DATE
A4	CHANGE THE DRAWING	2023.06.09
A3	CHANGE THE DRAWING	2021.10.26
A2	CHANGE THE DRAWING	2021.03.22
A1	CHANGE THE DRAWING	2017.12.06
A0	NEW RELEASE	2015.05.10