



Surface Mount Schottky Barrier Rectifier

Reverse Voltage - 40 to 100V

Forward Current - 5.0A

**FEATURES**

- Metal silicon junction, majority carrier conduction
- For surface mounted applications
- Low power loss, high efficiency
- High forward surge current capability
- For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications

**MECHANICAL DATA**

- Case: SMC
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 217mg / 0.0077oz

**PINNING**

PIN	DESCRIPTION
1	Cathode
2	Anode



Top View

Marking Code: SSL54~SSL510  
Simplified outline SMC and symbol

**Absolute Maximum Ratings and Electrical characteristics**

Ratings at 25 °C ambient temperature unless otherwise specified. Single phase, half wave, 60Hz resistive or inductive load, for capacitive load, derate by 20 %

Parameter	Symbols	SSL54C	SSL545C	SSL55C	SSL56C	SSL510C	Units					
Maximum Repetitive Peak Reverse Voltage	$V_{RRM}$	40	45	50	60	100	V					
Maximum RMS voltage	$V_{RMS}$	28	32	35	42	70	V					
Maximum DC Blocking Voltage	$V_{DC}$	40	45	50	60	100	V					
Maximum Average Forward Rectified Current	$I_{F(AV)}$	5.0					A					
Peak Forward Surge Current, 8.3ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	$I_{FSM}$	150					A					
Max Instantaneous Forward Voltage at 5 A	$V_F$	0.45		0.50	0.60	mA	V					
Maximum DC Reverse Current $T_a = 25^\circ C$ at Rated DC Reverse Voltage $T_a = 100^\circ C$	$I_R$	0.5 50										
Typical Junction Capacitance <sup>(1)</sup>	$C_j$	500	300				pF					
Typical Thermal Resistance <sup>(2)</sup>	$R_{\theta JA}$	60					°C/W					
Operating Junction Temperature Range	$T_j$	-55 ~ +150					°C					
Storage Temperature Range	$T_{stg}$	-55 ~ +150					°C					

( 1 ) Measured at 1 MHz and applied reverse voltage of 4 V D.C

( 2 ) P.C.B. mounted with 2.0" X 2.0" (5 X 5 cm) copper pad areas.



Fig.1 Forward Current Derating Curve

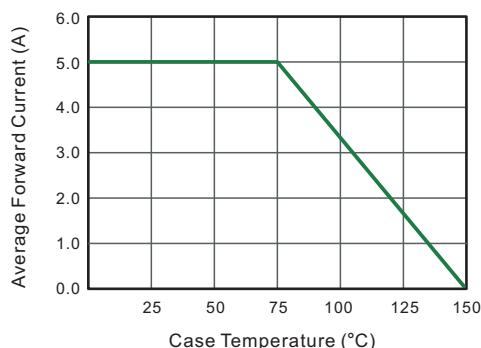


Fig.2 Typical Reverse Characteristics

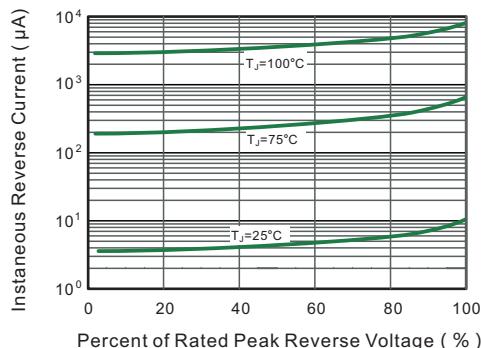


Fig.3 Typical Forward Characteristic

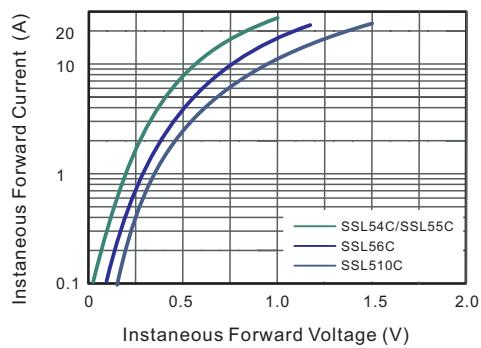


Fig.4 Typical Junction Capacitance

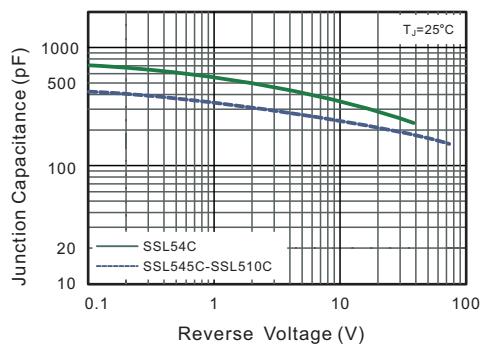


Fig.5 Maximum Non-Repetitive Peak Forward Surge Current


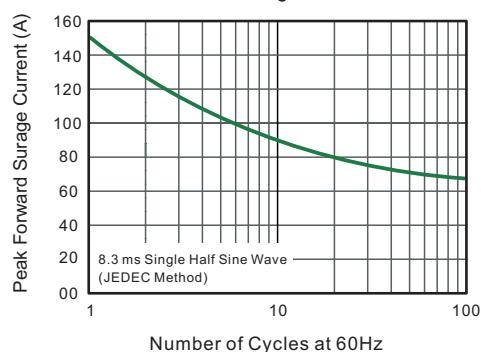


Fig.6- Typical Transient Thermal Impedance




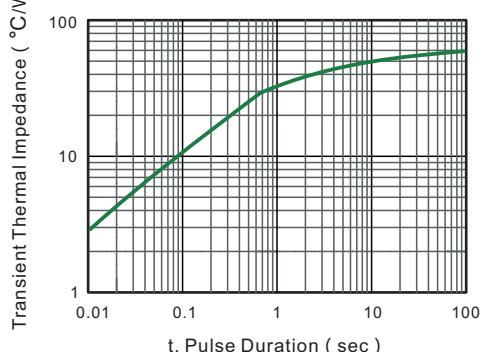

## PACKAGE OUTLINE

Plastic surface mounted package; 2 leads


SMC

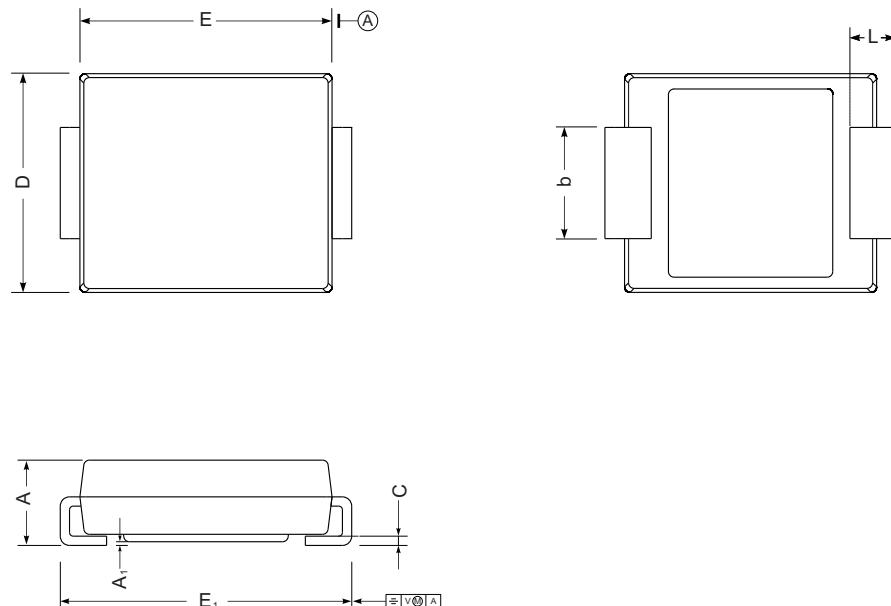

SMC mechanical data

UNIT		A	E	D	E <sub>1</sub>	A <sub>1</sub>	C	L	b
mm	max	2.62	7.0	6.2	8.0	0.21	0.31	1.6	3.25
	min	2.00	6.5	5.6	7.6	0.05	0.15	0.9	2.75
mil	max	103	276	244	315	8.3	12	63	128
	min	79	256	220	299	2.0	5.9	35	108

## The recommended mounting pad size

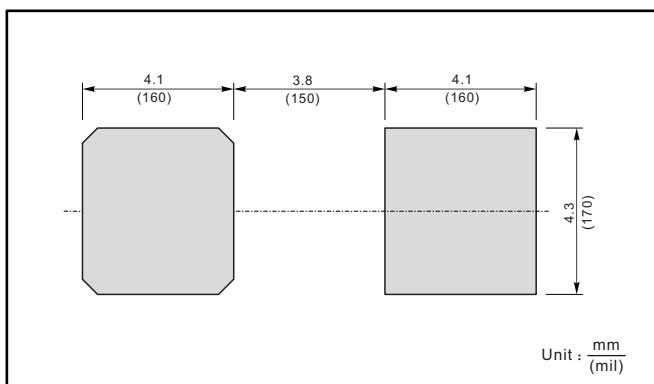

## Marking

Type number	Marking code
SSL54C	SSL54
SSL545C	SSL545
SSL55C	SSL55
SSL56C	SSL56
SSL510C	SSL510