

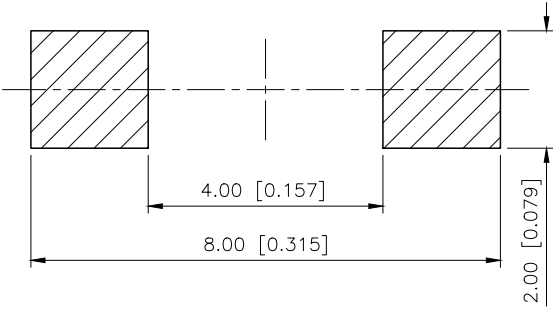


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.06.06	阿树


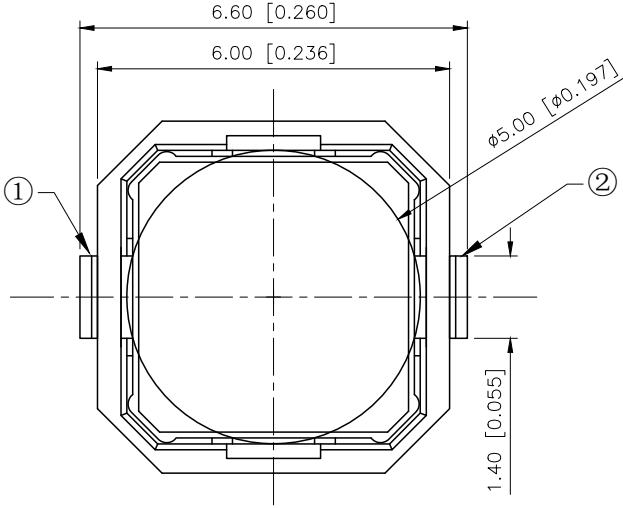


RECOMMENDED P.C.B LAYOUT

规格Specifications:
额定负荷 Rating : DC 12V/50mA
接触电阻Contact Resistance: 100mΩ max
绝缘电阻Insulation resistance :DC100V 60S 100MΩ min
抗电强度Dielectric strength :AC250V(50~60HZ) 60S min
操作力Operation force:≤180±50gf ;≥250±50gf
寿命试验Operating Life :100,000cycles ;100000cycles



CIRCUIT DIAGRAM

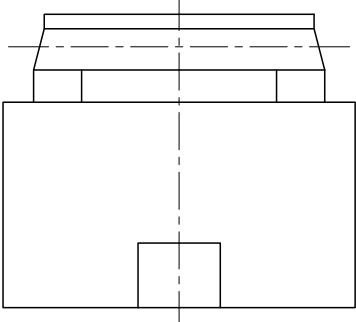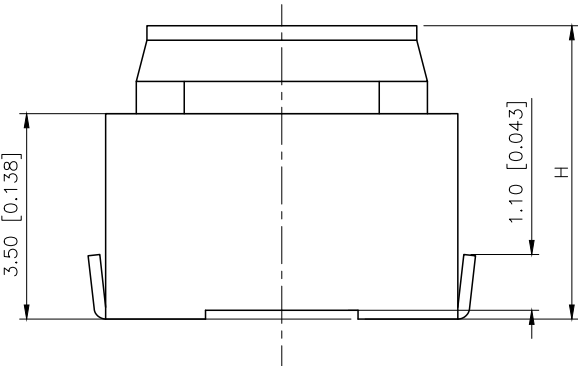

⑤	Cover	1	LCP	BLACK
④	Actuator	1	Silicone	
③	Contact	1	Stainless Steel	Ag-Plated
②	Terminal	2	Brass	Ag-Plated
①	Housing	1	LCP	BLACK
ITEM	PAPT NAMF	QTY	MATERIAL	FINISHING

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAuces	



DESIGN	阿树
CHECKED	
APPROVED	

VIEW:	
UNIT:	mm/in
SIZE:	A4

MODEL TYPE:	TACT SWITCH
PART NO.:	TS-1199A-X-X
DWG NO.:	

SCALE	PAGE	REVISION
N/A	1/1	A1