


PXM6010/22P/CR/0910 Datasheet

Product Name // Flex Cable Connector PXM6010 Series 22
Contact Plug Crimp/Solder Termination (contacts available
separately) 9mm-10mm Cable (Light Grey Gland) Metal
Body No Braid Termination

 [View Product Page](#)

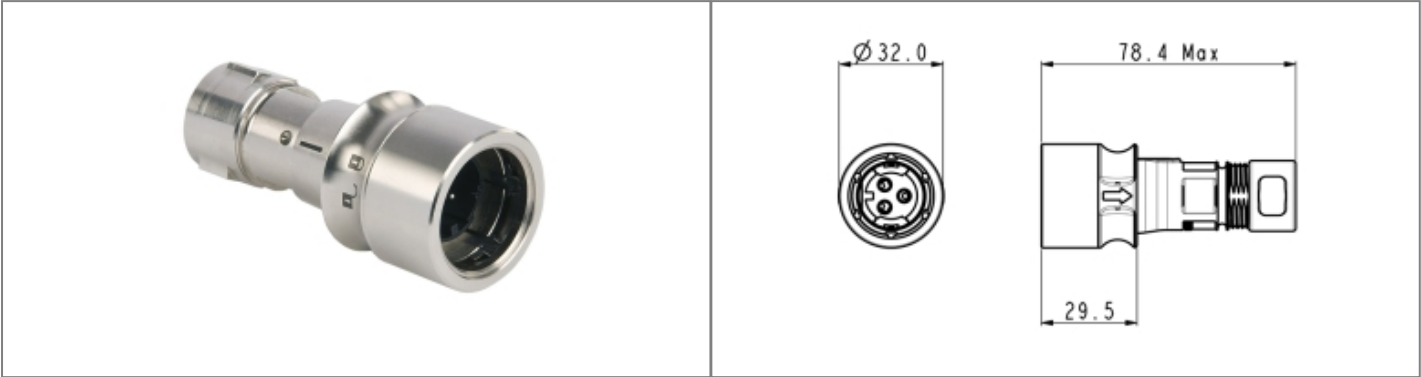

// Product Description:	
- Flex Cable Connectors - Water and dustproof to IP66, IP68, IP69K when mated with compatible connector 30 degree push twist locking, tamperproof lock prevents accidental un-mating - Plug 22 Contacts - Crimp/solder termination with contacts and fitting tool available separately	- Metal Body No Braid Termination - Cable acceptance 9mm-10mm diameter - Gland Pack PXP6088 available separately to accomodate all sizes - PXM6081 Sealing Cap available separately to maintain IP rating of unmated connectors - Mate with PXM6011 Series Inline and PXM6012 Series Front Panel Mount Connectors

// General Information:	
Product Display Title: Product Family: Product Series: Approvals: Body Colour: Body Material: Body Material Type: Contact Type: Coupling Type: Current Max: Diameter Over Coupling Ring Mm: Function: Insulation Resistance: Ip Rating: Max Cable Entry Size: Min Cable Entry Size: Max Contact Accomodation Awg: Min Contact Accomodation Awg: Max Contact Accomodation Mm2: Min Contact Accomodation Mm2: Max Operating Temperature: Min Operating Temperature: Number Of Contacts: Rohs Compliant: Salt Spray Corrosion Test: Voltage Max:	Flex Cable Connectors Circular Power Connectors 6000 Series Buccaneer UL Metallic Grey Brass Metal Body No Braid Termination Plug Contact Push-Twist 1.5A, 2A, 3A 32mm Flex Cable Connector >10⁶MΩ @500V DC IP66, IP68, IP69K 10mm 9mm 26AWG 26AWG 0.14mm2 0.14mm2 +120°C -40°C 22 Contacts Yes EN60068-2-11 Test Ka Salt Mist 60V

// Product PDF Links

 6000 Series power connectors...

 6000 Series metal body power...

// Product 3D CAD Model Links

 PXM6010/22P/CR/09103D CAD Model