

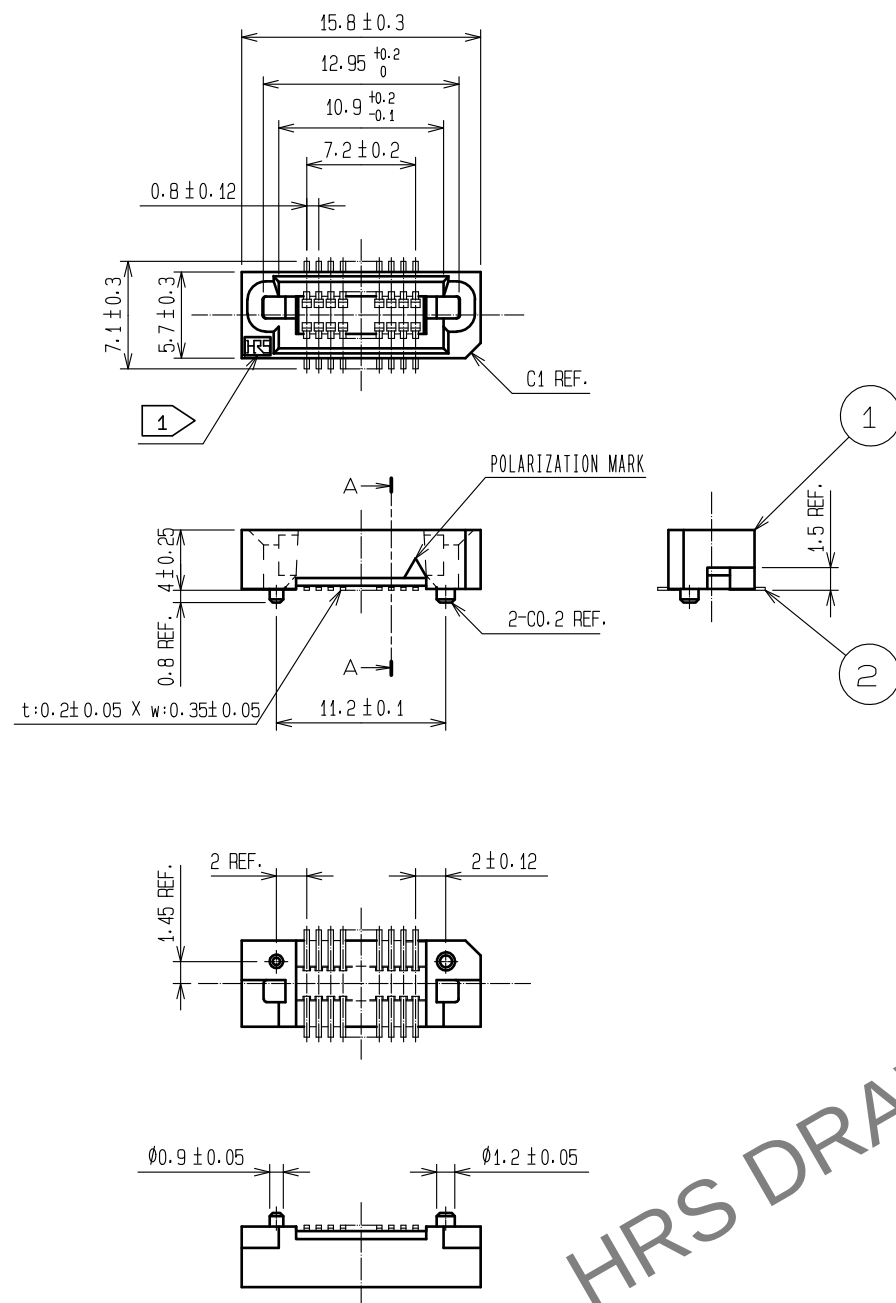


Jul.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

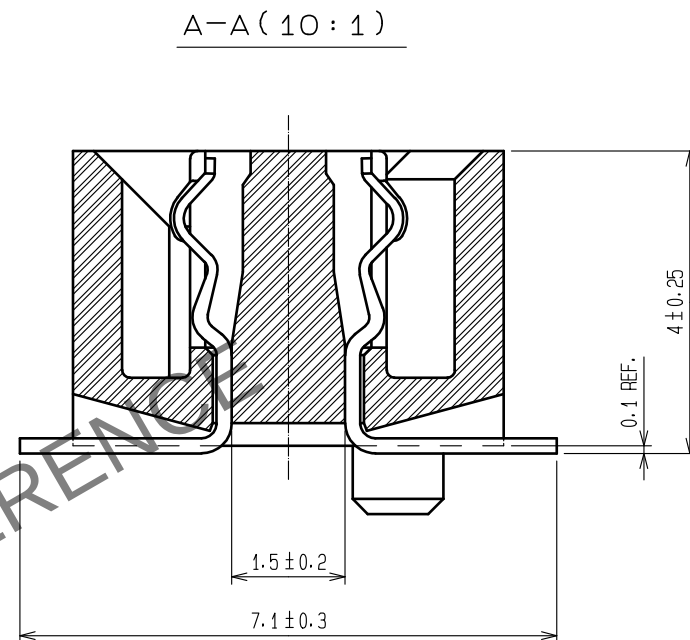


RECOMMENDED P.C.B LAND PATTERN (MOUNT SIDE)
(RECOMMENDED METAL MASK THICKNESS: $t=0.15$)

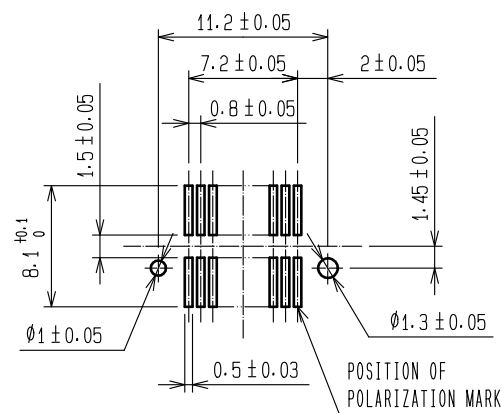

- NOTE
- 1 HRS MARK SHALL BE OPTIONAL.
 - 2 LEAD CO-PLANARITY SHALL BE 0.1 MAX.
 - 3 EMBOSSED CARRIER TAPE PACKAGING SHALL BE APPLIED FOR THIS PRODUCT.
 - 4 FOR MODIFICATION, ETC. PREVENTIVE HOLE FOR SINK MARK MAY BE ADDED ACCORDING TO CIRCUMSTANCES.

				4	POLYESTER	COVER TAPE
				3	POLYSTYRENE	EMBOSSED CARRIER TAPE
1	POLYPHENYLENE SULFIDE	LIGHT BROWN	UL94V-0	2	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.1μm MIN
						LEAD AREA:TIN 1μm MIN
						UNDER PLATING:NICKEL 2μm MIN
NO.	MATERIAL	FINISH , REMARKS		NO.	MATERIAL	FINISH , REMARKS

UNITS mm		SCALE		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
		2 : 1						
 HIROSE ELECTRIC CO., LTD.	APPROVED		: HS. OKAWA		15.07.17	DRAWING NO. EDC-084977-92-01		
	CHECKED		: HT. YAMAGUCHI		15.07.17	PART NO. FX6-20S-0.8SV(92)		
	DESIGNED		: MT. ITANO		15.07.17	CODE NO.		
	DRAWN		: KN. YAMAZAKI		15.07.16	CL576-0101-8-92		
						 1/2		

Jul.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

