

## MC 1,5/ 4-ST-3,5 BD:A,B,+,- - 1704155

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)


PCB connector, number of positions: 4, pitch: 3.5 mm, color: green, contact surface: Tin



The figure shows a 10-position version of the product

### Your advantages

- ✓ Well-known connection principle allows worldwide use
- ✓ Low temperature rise, thanks to maximum contact force
- ✓ Allows connection of two conductors

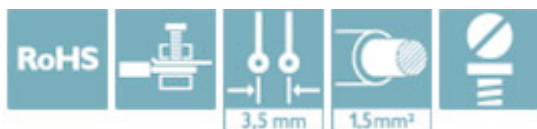

### Key Commercial Data

|              |                                                                                                         |
|--------------|---------------------------------------------------------------------------------------------------------|
| Packing unit | 50 pc                                                                                                   |
| GTIN         | <br>4 046356 677943 |
| GTIN         | 4046356677943                                                                                           |

### Technical data

#### Dimensions

|              |         |
|--------------|---------|
| Length [ l ] | 16.1 mm |
| Width [ w ]  | 14 mm   |
| Height [ h ] | 11.1 mm |
| Pitch        | 3.5 mm  |
| Dimension a  | 10.5 mm |

#### General

|                       |               |
|-----------------------|---------------|
| Range of articles     | MC 1,5/...-ST |
| Number of positions   | 4             |
| Nominal cross section | 1.5 mm²       |

#### Standards and Regulations

|                                  |     |
|----------------------------------|-----|
| Connection in acc. with standard | CUL |
|----------------------------------|-----|

# MC 1,5/ 4-ST-3,5 BD:A,B,+,- - 1704155

## Technical data

### Environmental Product Compliance

|            |                                                                                                     |
|------------|-----------------------------------------------------------------------------------------------------|
| REACH SVHC | Lead 7439-92-1                                                                                      |
| China RoHS | Environmentally Friendly Use Period = 50                                                            |
|            | For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration" |

## Approvals

### Approvals

#### Approvals

CSA / IECEx CB Scheme / VDE Gutachten mit Fertigungsüberwachung / EAC / cULus Recognized

#### Ex Approvals

### Approval details

|                    |                                                                                     |                                                                                                                                         |       |
|--------------------|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|-------|
| CSA                |  | <a href="http://www.csagroup.org/services-industries/product-listing/">http://www.csagroup.org/services-industries/product-listing/</a> | 13631 |
|                    | D                                                                                   | B                                                                                                                                       |       |
| Nominal voltage UN | 300 V                                                                               | 300 V                                                                                                                                   |       |
| Nominal current IN | 8 A                                                                                 | 8 A                                                                                                                                     |       |
| mm²/AWG/kcmil      | 28-16                                                                               | 28-16                                                                                                                                   |       |

|                    |                                                                                     |                                                           |                |
|--------------------|-------------------------------------------------------------------------------------|-----------------------------------------------------------|----------------|
| IECEx CB Scheme    |  | <a href="http://www.iecee.org/">http://www.iecee.org/</a> | DE1-60987-B1B2 |
| Nominal voltage UN | 160 V                                                                               |                                                           |                |
| Nominal current IN | 8 A                                                                                 |                                                           |                |
| mm²/AWG/kcmil      | 0.2-1.5                                                                             |                                                           |                |

|                                            |                                                                                     |                                                                                                                                                                                                                |          |
|--------------------------------------------|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| VDE Gutachten mit<br>Fertigungsüberwachung |  | <a href="http://www2.vde.com/de/Institut/Online-Service/VDE-gepruefteProdukte/Seiten/Online-Suche.aspx">http://www2.vde.com/de/Institut/Online-Service/<br/>VDE-gepruefteProdukte/Seiten/Online-Suche.aspx</a> | 40011723 |
| Nominal voltage UN                         | 160 V                                                                               |                                                                                                                                                                                                                |          |
| Nominal current IN                         | 8 A                                                                                 |                                                                                                                                                                                                                |          |
| mm²/AWG/kcmil                              | 0.2-1.5                                                                             |                                                                                                                                                                                                                |          |

## MC 1,5/ 4-ST-3,5 BD:A,B,+,- - 1704155

### Approvals

|     |                                                                                   |         |
|-----|-----------------------------------------------------------------------------------|---------|
| EAC |  | B.01742 |
|-----|-----------------------------------------------------------------------------------|---------|

|                    |                                                                                   |                                                                                                                                                       |                 |
|--------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| cULus Recognized   |  | <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> | E60425-20110128 |
|                    | D                                                                                 | B                                                                                                                                                     |                 |
| Nominal voltage UN | 300 V                                                                             | 300 V                                                                                                                                                 |                 |
| Nominal current IN | 8 A                                                                               | 8 A                                                                                                                                                   |                 |
| mm²/AWG/kcmil      | 30-14                                                                             | 30-14                                                                                                                                                 |                 |

Phoenix Contact 2018 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Phoenix Contact:](#)

[1704155](#)