



A




KEY A

B

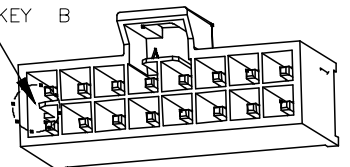


KEY B

C

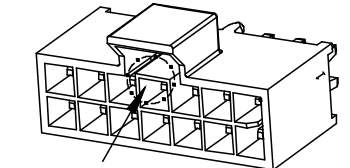


2x03, 2x05, 2x07 Pin

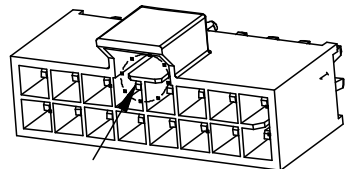


2x02, 2x04, 2x06, 2x08 Pin

D

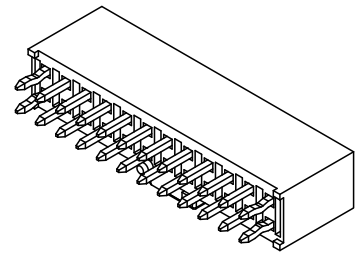

REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.2.10	阿树

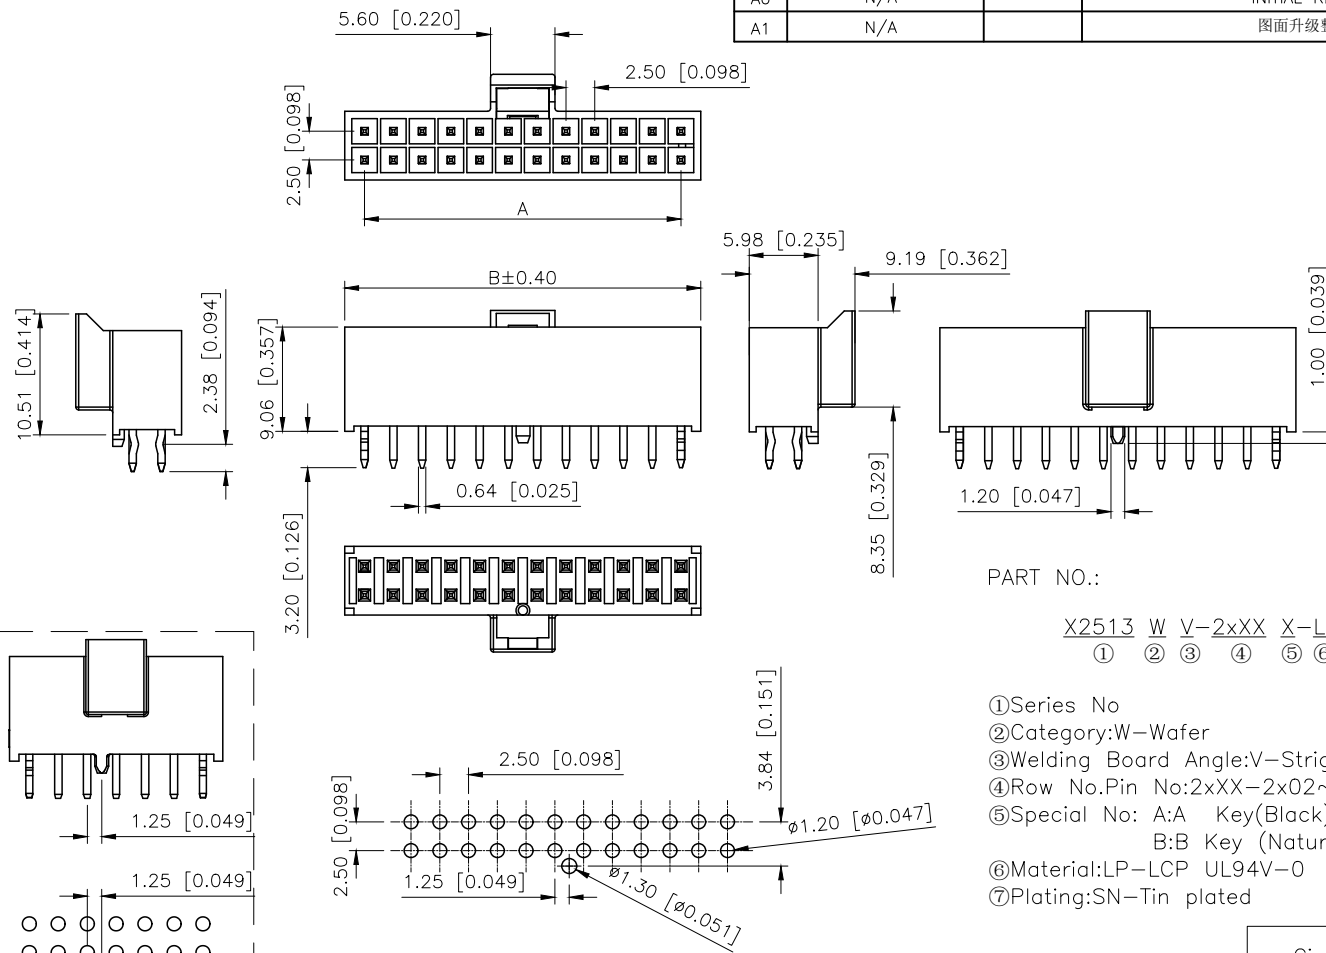

Specifications:
规格:
Voltage rating:250V AC/DC
额定电压: 250V AC/DC
Current rating:4A AC/DC
额定电流: 4A AC/DC
Withstanding voltage:1500V AC/minute
耐受电压: 1500V AC/分钟
Temperature range:-40℃--+125℃
温度范围: -40℃--+125℃
Insulation resistance:1000MΩ min
绝缘电阻: 1000MΩ Min
Contact resistance:15mΩ Max
接触电阻: 15mΩ Max

PART NO.:

X2513 W V-2xXX X-LP SN
① ② ③ ④ ⑤ ⑥ ⑦

- ①Series No
- ②Category:W-Wafer
- ③Welding Board Angle:V-Straight 180°
- ④Row No.Pin No:2xXX-2x02~2x08 Pin
- ⑤Special No: A:A Key(Black);
B:B Key (Natural)
- ⑥Material:LP-LCP UL94V-0
- ⑦Plating:SN-Tin plated

Recommended P.C.B hloe dimension
Recommended P.C.B thickness 1.6~2.4mm

Circuit	DIM. A	DIM. B
N(N=4~16)	1.25xN-2.5	1.25xN+0.94

X2513WV-2xXXA-LPSN	LCP	Copper Alloy	X2513H
X2513WV-2xXXB-LPSN			
PART NO	Material	Material(Pin)	Suitable XKB Housing

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAUCES	



DESIGN	阿树	VIEW:		MODEL TYPE: 2.50mm Crimp Style Connector
CHECKED		UNIT:	mm/in	PART NO.: X2513WV-2xXXX-LPSN
APPROVED		SIZE:	A4	DWG NO.:

A

B

C

D