

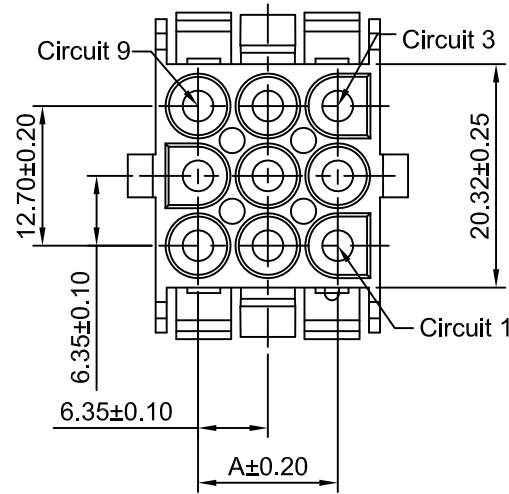
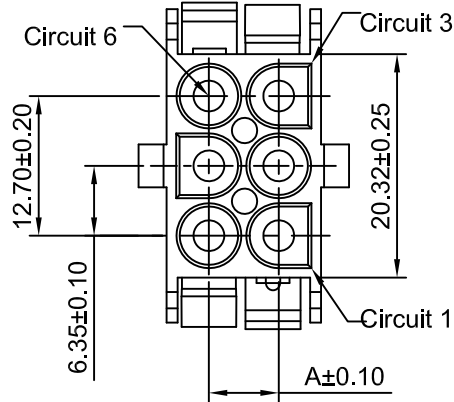


3x2P

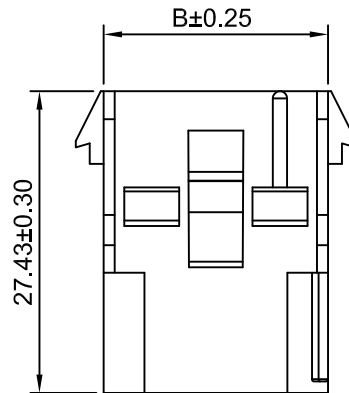

3x3P~3x5P



Ordering Information:

C6351HM-3xXP - *** - **
1 2 3

1.Part NO.

2.Material:

(Blank):Nylon 66,UL94V-2/Natural

V0:Nylon 66,UL94V-0/White

GWT:Nylon 66,UL94V-0,GWT 750°C

3.Color:

BR:Brown

RD:Red

OR:Orange


YL:Yellow

GN:Green

BL:Blue

GY:Gray

BK:Black

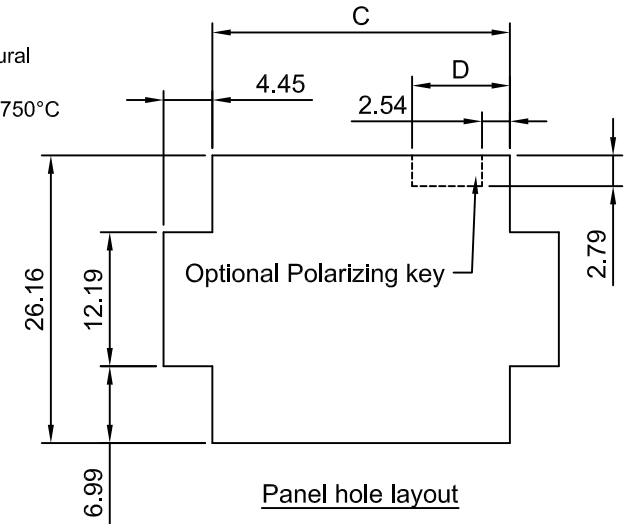

SPECIFICATIONS:

Current Rating: 13.5A AC,DC(Max)

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 3.5mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 5000V AC/minute

Material: Nylon 66, UL94V-2(Natural)

Ordering Information & Dimensions

Circuits	Dimensions(mm)				Circuits	Dimensions(mm)			
	A	B	C	D		A	B	C	D
3x2P	6.35	14.04	14.35	6.35	3x4P	19.05	26.74	27.05	8.89
3x3P	12.70	20.39	20.70	6.35	3x5P	25.40	33.09	33.40	8.89

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	1.5:1	1 of 1	6.35mm PITCH	
DRAWN	CHKD	APPR	TRIPLE ROW HOUSING	
Haisen Li	Diankui Wan	Jack Yin	DRAWING NO. C6351HM-3xXP	
General Tolerances			THIRD ANGLE PROJECTION	REV A1
A1 CHANGE THE DRAWING 2021.04.15				
A0 NEW RELEASE 2015.04.25				
REV DESCRIPTION DATE				