
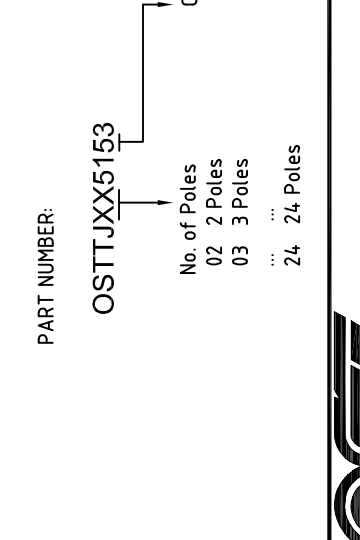
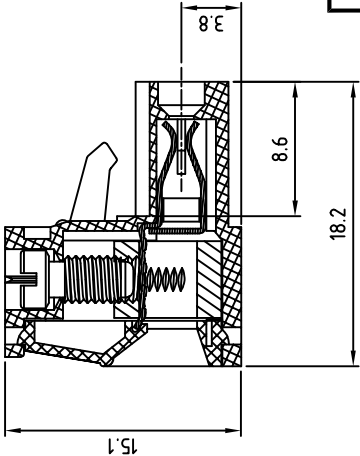


1	2	3	4	5	6	7
				SIGN	DATE	DESCRIPTION
				△	2012.11.12	Updated agency approval data
				APPROVER		
				Janny		
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY Y!!!						
E						

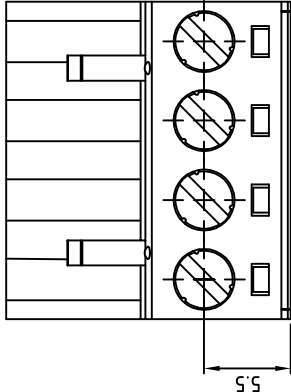

Top view dimensions: 5.5mm, 2.54mm, N×5.08, (N-1)×5.08, 5.08mm.

Side view dimensions: 15.1mm, 18.2mm, 8.6mm, 3.8mm.

Cross-sectional view dimensions: 15.1mm, 18.2mm, 8.6mm, 3.8mm.

Material

- Terminal body (metal housing): Brass(CuZn)
- Terminal screw: Steel Zinc plating "-" slot type
- Wire guard: PhBz ,Tin plated
- Insulator (housing): Thermoplastic (UL94V-0)

Electrical cULus / VDE / TUV

- Voltage rating: 300V/300V/300V
- Current rating: 20A/20A/20A
- Wire range: 2.5mm²/ 0.34-2.5mm²
- Solid wire(AWG): 12-24
- Stranded wire(AWG): 12-24
- Torque: 5Lb-In/0.5N.m/0.56N.m
- Screw: M3
- Wire strip length: 7-8mm
- Withstanding Voltage: 1.6KV/2.5KV/2.5KV
- Operating temperature: -30°C to +105°C
- Safety Approval: cULus TÜV

Use with OSTOQ 1.0x1.0mm square pin. Withdrawal force: 200-500gf/pole

PART NUMBER: OSTTJXX5153

No. of Poles

02	2 Poles
03	3 Poles
...	...
24	24 Poles

COLOR

0:	Black
5:	Green (Standard)
6:	Blue
8:	Grey

OST ON-SHORE TECHNOLOGY, INC.

OSTTJ - 5.08mm Series

TITLE	OSTTJ - 5.08mm Series	DWG NO.	OSTTJXX5153.DWG
PART NO.	OSTTJXX5153	CUST NO.	
APPROVED	Shi Jun 2006.10.23	CHECKED	Marvin 2006.10.23
DESIGNED	Marvin 2006.10.23	DRAWN	Marvin 2006.10.23
SHEET: 01/01		REV:	E

7

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

N=Number of poles