

MICRO SWITCH

A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY
PRAIRIE, ILLINOIS

FED. MFR. CODE 91929

SWITCH - BASIC

CATALOG LISTING

DT-2R4-B6

(M) DT-2R4-B6

ISSUE 2

REPLACES

RELEASE NO.

DT-2R4-B6

M

DRAWING
NUMBER

9

ISSUE
3

CHECK

REVISIONS


A	CO15451	L S D	28 JUN 61
B	CO17707	R E R	14 MAR 63
C	CO17725	L S D	25 JUN 63
D	CO19276	M B F	12 JUNE 64
E	CO-30659	SRH	31 MAY 72
F	CO37528	C J H	31 AUG 76
G	CO 39046	G A S	16 SEPT 77

CHECK

CHECK

DRAWN

S D 28 JUN 61

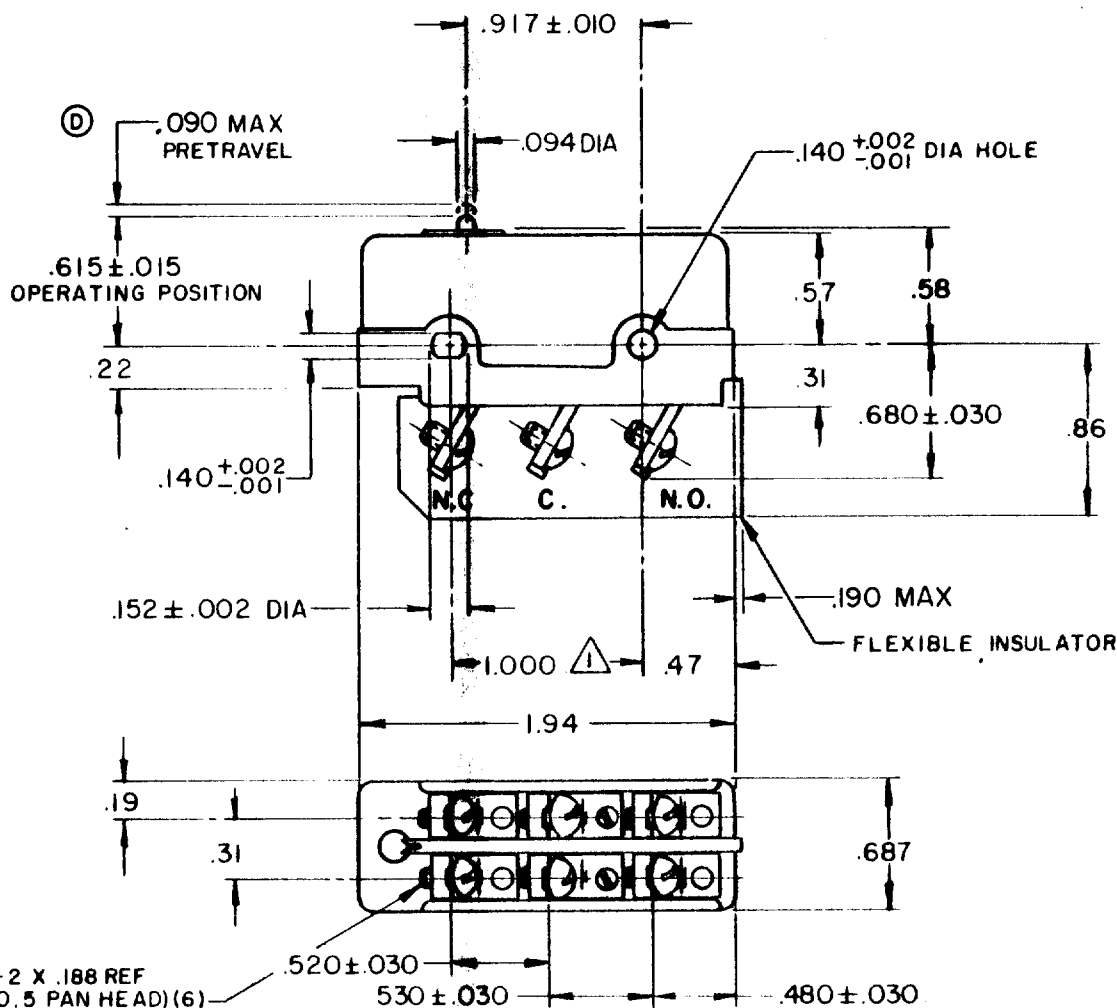

NOTE -

△ MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF
.139 MAX DIA ON 1.000 ± .002 CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL
OPERATING FORCE - - - - - 12-20 OZ	CONTACT ARRANGEMENT D. P. D T	DO NOT SCALE PRINT
RELEASE FORCE - - - - - 1 OZ MIN	UNDERWRITERS' LAB. INC. LISTED RATING -L59- 10 A-125 OR 250 VAC 0.3 A-125 VDC; 0.15 A-250 VDC	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: ONE PLACE (.0) ±.030 TWO PLACE (.00) ±.015 THREE PLACE (.000) ±.005 ANGLES ±
DIFFERENTIAL TRAVEL - - - - .040-.060		WEIGHT
OVERTRAVEL - - - - - .015 MIN		

