



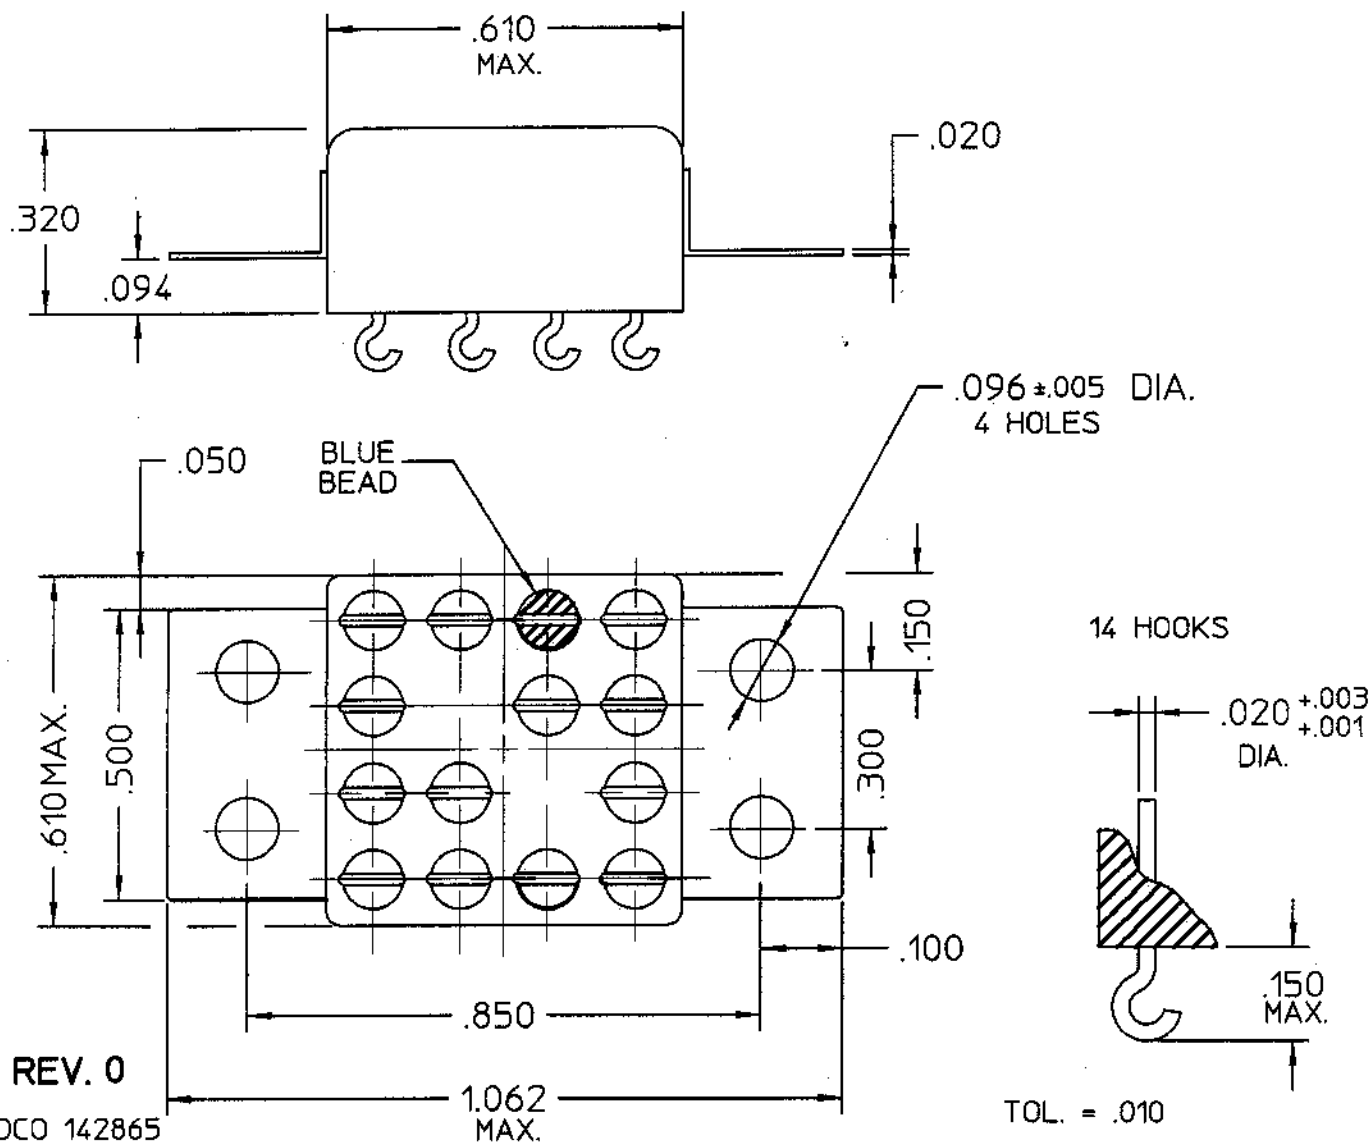

COIL: @ 25°C
 RESISTANCE 720 OHMS ±10%
 NOMINAL VOLTAGE 26.5 VDC
 MUST OPERATE 13.5 VDC
 MUST RELEASE 8.1 VDC MAX., 1.5 VDC MIN.

ENVIRONMENT:
 VIBRATION: 10 CPS TO 3000 CPS @ 30 g's
 SHOCK 75 g's 6 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C
 NOTES: OPERATE 4 MS MAX.
RELEASE 4 MS MAX.
CONTACT STABILIZATION 2.5 MS MAX.

CUSTOMER DATA SHEET



TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO
2 AMPS 28 VDC RESISTIVE
100,000 OPERATIONS

DR. B.D. 4/9/01

CK. *[Signature]*

CH Technologies
 advanced control electronic solutions

CUST. QPL
 CUST. NO. M39016/14-001M REV.

"3SBH" RELAY

3SBH1138A2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[M39016/14-001M](#)