

Actuator

704.510.008I

Distribution by
DigiKey

DigiKey



<https://digikey.eao.com/p/704.510.008I>

Your product:



704.510.008I Actuator

FRONT

Front dimension:	35 mm x 35 mm
Front bezel material:	Plastic
Front bezel colour:	Silver

MOUNTING

Design:	flush
Mounting cut-out:	30 mm x 30 mm

OPERATING-/INDICATION PART

Lever material:	plastic
Lever colour:	Black
Lever shape:	short

ELECTRICAL CHARACTERISTICS

Standards:	The switches comply with the "Standards for low-voltage switching devices" DIN EN 60947-1
------------	---

MECHANICAL CHARACTERISTIC

Switching angle:	90° right
Weight:	0.056 kg
Switching action:	Rest - Maintained
Mechanical lifetime:	≤2.5 Mio. cycles of operation
Switching positions:	2 positions

AMBIENT CONDITION

IP Protection:	IP65 front side
Storage temperature:	– 40 °C ... + 85 °C
Operating temperature:	– 40 °C ... + 55 °C


OTHER

Short Description: Actuator, 30 mm x 30 mm, 35 mm x 35 mm, optional illuminative, Black, short, Silver, Plastic, Rest - Maintained


max. number of switching elements: 3

Hints: Max. 3 switching elements can be clipped on

Switching positions:

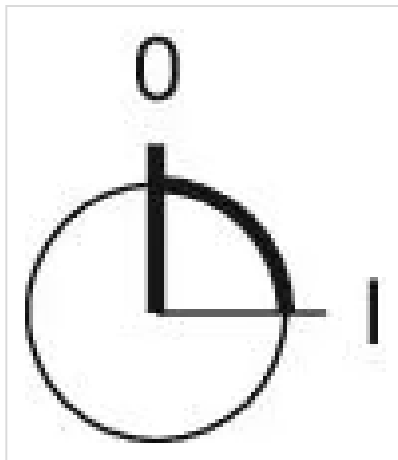


Mounting cut-outs:

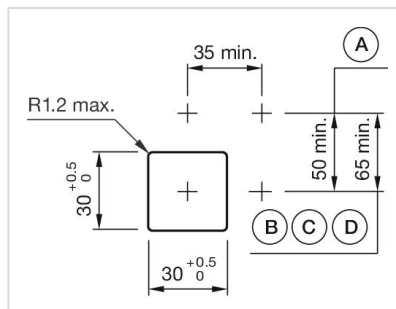

A = Screw terminal
 B = Push-in terminal (PIT)
 C = Plug-in terminal 6.3 mm x 0.8 mm
 D = Double plug-in terminal 6.3 mm x 0.8 mm

Dimension drawings:

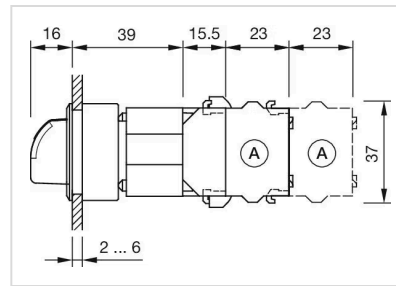

A = Screw terminal

Wiring diagrams:

