

Actuator

17-000350

Distribution by
DigiKey**DigiKey**<https://digikey.eao.com/p/17-000350>

Your product:



17-000350 Actuator

FRONT

Front dimension:	Ø 7 mm
Reflector:	Metal, polished chromium-plated, flat top LED
Front form:	round

MOUNTING

Mounting cut-out:	Ø 6 mm
Design:	raised

OPERATING-/INDICATION PART

Illumination colour:	Red
----------------------	-----

ELECTRICAL CHARACTERISTICS

Lumi. Intensity:	8 mcd
Operation current:	15 mA $\pm$ 15 %
Operating voltage:	24 V AC/DC $\pm$ 10 %
Polarity:	Anode (+) Brass plug-in connector Cathode (-) Brass tinned plug-in connector

MECHANICAL CHARACTERISTIC

Tightening torque:	Fixing nut max. 0.2 Nm
Weight:	0.003 kg
Terminal:	Plug-in terminal, 2 x 0.5 mm

AMBIENT CONDITION

Storage temperature: – 25 °C ... + 80 °C

Operating temperature: – 20 °C ... + 60 °C

IP Protection: IP40 front side, IP65 front side, according to IEC 60529

CERTIFICATE

Conformities: 2011 / 65 / EC (RoHS), 2014 / 35 / EU (230 VAC)

Approbations: UL


OTHER

Hints: Connectors: Brass terminal = anode (+); brass tinned terminal = cathode (-), IP67 front side gap between LED and reflector and gap between reflector and frontplate sealed to IP67 when using the supplied gasket., The plastic is limited resistant to chemicals.

Kind of illumination: Single-LED


Short Description: Actuator, Ø 6 mm, Ø 7 mm, round, Plug-in terminal, 2 x 0.5 mm, Red

Dimension drawings:

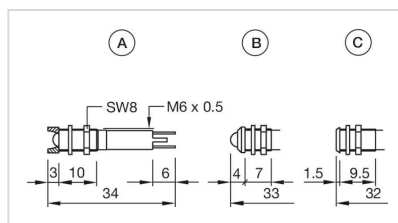

A = interior
B = exterior
C = superflat

Wiring diagrams:

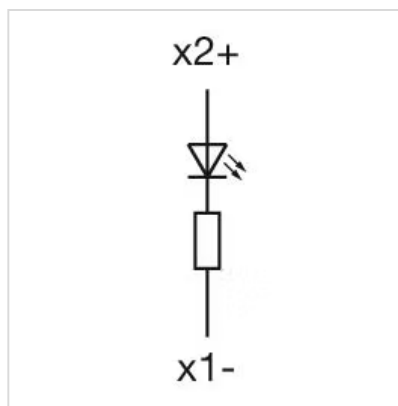

Mounting cut-outs:

