

# SACC-M12FR-4CON-PG 7-VA - Connector



1553284

<https://www.phoenixcontact.com/us/products/1553284>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Connector, Universal, 4-position, Socket angled M12, coding: A, Screw connection, knurl material: Stainless steel 1.4404, cable gland Pg7, external cable diameter 4 mm ... 6 mm

## Your advantages

- Safe use in the field, thanks to a high degree of protection
- Screw connection: proven connection technology for a large selection of different conductors

## Commercial data

Item number	1553284
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	BF30
Product key	BF2CAA
Catalog page	Page 23 (C-2-2019)
GTIN	4046356170208
Weight per piece (including packing)	27.25 g
Weight per piece (excluding packing)	26.29 g
Customs tariff number	85366990
Country of origin	DE

# SACC-M12FR-4CON-PG 7-VA - Connector



1553284

<https://www.phoenixcontact.com/us/products/1553284>

## Technical data

### Notes

Assembly note

**NOTE:** Observe the permissible bending radii when routing cables, since the degree of protection may be at risk if the bending forces are too high. Reduce mechanical loads upstream of the connector, e.g., by using cable ties.

### Mounting

Assembly note

The connector pin assignment can be rotated 90° to the cable outlet

### Product properties


Product type	Circular connector (cable-side)
Sensor type	Universal
Number of positions	4
No. of cable outlets	1
Shielded	no
Coding	A
Cable outlet	angled
Pg screw connection	Pg7

### Insulation characteristics

Overvoltage category	II
Degree of pollution	3

### Dimensions

Dimensional drawing



Length

38 mm

### External dimensions

Outside diameter

4 mm ... 6 mm

### Housing

Diameter housing

20 mm

### Material specifications

Seal material	NBR
Material of grip body	PA
Contact material	CuZn
Contact surface material	Au

# SACC-M12FR-4CON-PG 7-VA - Connector



1553284

<https://www.phoenixcontact.com/us/products/1553284>

Contact carrier material	PA
Material for screw connection	Stainless steel 1.4404

## Connection data

### Conductor connection

Connection method	Screw connection
Connection cross section	0.25 mm² ... 0.75 mm² (without ferrule)
	0.14 mm² ... 0.75 mm² (with ferrule)
	0.25 mm² ... 0.75 mm² (solid)
Connection cross section AWG	24 ... 18 (without ferrule)
	26 ... 20 (with ferrule)
Tightening torque	0.8 Nm ... 1 Nm (Pressure screw)
	0.2 Nm (Screw terminal blocks)

## Electrical properties

Rated surge voltage	2.5 kV
Contact resistance	≤ 3 mΩ
Insulation resistance	≥ 100 MΩ
Nominal voltage U <sub>N</sub>	250 V AC
	250 V DC
Nominal current I <sub>N</sub>	4 A

## Mechanical properties

### Mechanical data

Insertion/withdrawal cycles	≥ 100
-----------------------------	-------

## Connector

### Connection 1

Head design	Socket
Head cable outlet	angled
Head thread type	M12
Coding	A

## Cable/line

Signal type/category	Universal
----------------------	-----------

## Environmental and real-life conditions

### Ambient conditions

Degree of protection	IP65
	IP67
	IP69K
Ambient temperature (operation)	-40 °C ... 85 °C

# SACC-M12FR-4CON-PG 7-VA - Connector



1553284

<https://www.phoenixcontact.com/us/products/1553284>


## Standards and regulations

M12

Standard designation	M12 connector
Standards/specifications	IEC 61076-2-101

## Drawings

Schematic diagram

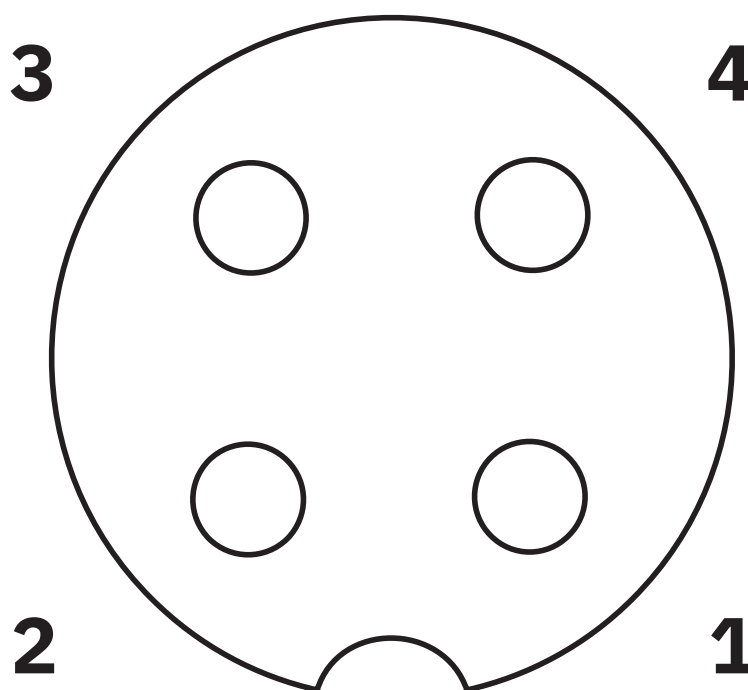

Pin assignment M12 socket, 4-pos., A-coded, view female side


# SACC-M12FR-4CON-PG 7-VA - Connector

1553284

<https://www.phoenixcontact.com/us/products/1553284>



Dimensional drawing

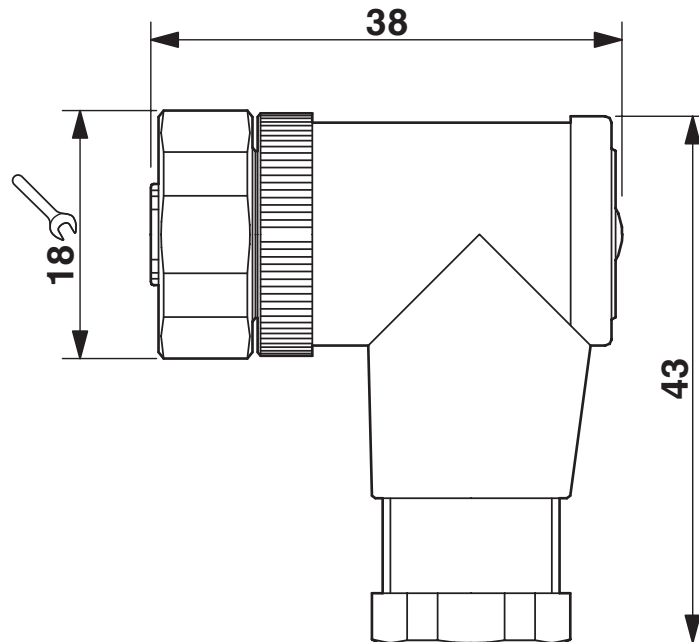

M12 x 1 socket, angled

# SACC-M12FR-4CON-PG 7-VA - Connector





1553284


<https://www.phoenixcontact.com/us/products/1553284>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1553284>

 <b>cUL Recognized</b> Approval ID: FILE E 221474				
	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
	250 V	4 A	-	-

 <b>UL Recognized</b> Approval ID: FILE E 221474				
	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
	250 V	4 A	-	-

 <b>EAC</b> Approval ID: RU C-DE.BL08.B.00511				
--	--	--	--	--

<b>cULus Recognized</b>				
-------------------------	--	--	--	--

# SACC-M12FR-4CON-PG 7-VA - Connector



1553284

<https://www.phoenixcontact.com/us/products/1553284>

## Classifications

### ECLASS

ECLASS-11.0	27440102
ECLASS-12.0	27440116
ECLASS-13.0	27440116

### ETIM

ETIM 9.0	EC002635
----------	----------

### UNSPSC

UNSPSC 21.0	39121400
-------------	----------



# SACC-M12FR-4CON-PG 7-VA - Connector



1553284  
<https://www.phoenixcontact.com/us/products/1553284>

## Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	f3da7285-392d-4ed5-abde-97d0e9baf9c9

Phoenix Contact 2024 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)