

IO-Link Touch Stainless Steel

84-ADKS-B14-04AE



<https://eao.com/p/84-ADKS-B14-04AE>

Your product:



84-ADKS-B14-04AE

IO-Link Touch Stainless Steel

FRONT

Front dimension:	Ø 30 mm
Front form:	round
Front bezel material:	Plastic

MOUNTING

Design:	flush
Mounting type:	Panel mounting
Mounting cut-out:	Ø 22.5 mm

OPERATING-/INDICATION PART

Lens illumination:	illuminative
Lens shape:	flush
Lens material:	Plastic
Lens optics:	transparent
Symbol:	Standby (B14)

ELECTRICAL CHARACTERISTICS

Operating voltage:	8,4 - 32 V DC
--------------------	---------------

MECHANICAL CHARACTERISTIC

Terminal:	Connector M12
Weight:	0.015 kg

Switching system: Capacitive

Operating force: No actuating force necessary

AMBIENT CONDITION

IK front protection: IK08

IP front protection: IP69K

Operating temperature: – 30 °C ... + 65 °C

Climate resistance: Relative humidity, max. 95%, non-condensing

CERTIFICATE

Approbations: CSA, EHEDG

Conformities: CE, UKCA


OTHER

Short Description: IO-Link Touch Stainless Steel, Ø 22.5 mm, Ø 30 mm, flush, illuminative, Plastic, transparent, round, Plastic, Connector M12, IP69K, IK08, Standby (B14)




Housing colour: Black

Housing material: Plastic




Mounting cut-outs:

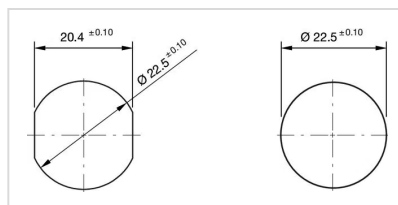

Component layouts:

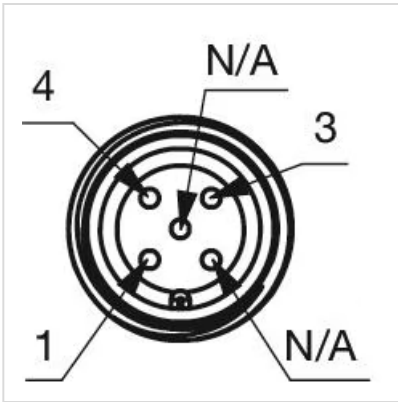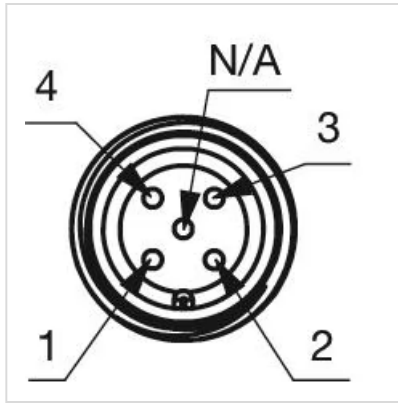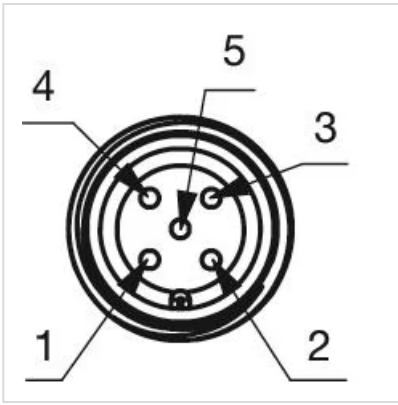

Wiring diagrams:

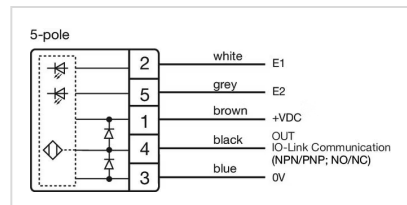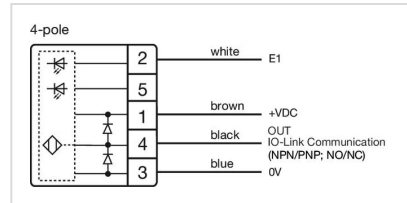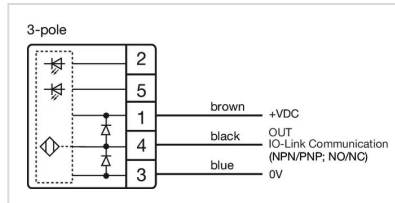

Dimension drawings:

