

**Surface Mount Schottky Barrier Rectifier**
**Reverse Voltage - 45 to 200 V**
**Forward Current - 10 A**
**FEATURES**

- ◆ Metal silicon junction, majority carrier conduction
- ◆ For surface mounted applications
- ◆ Low power loss, high efficiency
- ◆ High forward surge current capability
- ◆ For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications
- ◆ Lead free in comply with EU RoHS 2011/65/EU directives

**MECHANICAL DATA**

- ◆ Case: DO-214AB/SMC
- ◆ Terminals: Solderable per MIL-STD-750, Method 2026
- ◆ Approx. Weight: 0.22g / 0.0077oz


**Absolute Maximum Ratings and Electrical characteristics**

Ratings at 25 ° ambient temperature unless otherwise specified. Single phase, half wave, 60Hz resistive or inductive load, for capacitive load, derate by 20 %

Parameter	Symbols	SS1045C	SS1060C	SS10100C	SS10200C	Units		
Maximum Repetitive Peak Reverse Voltage	$V_{RRM}$	45	60	100	200	V		
Maximum RMS voltage	$V_{RMS}$	32	42	70	140	V		
Maximum DC Blocking Voltage	$V_{DC}$	45	60	100	200	V		
Maximum Average Forward Rectified Current	$I_{F(AV)}$	10.0				A		
Peak Forward Surge Current, 8.3ms Single Half Sine-wave Superimposed On Rated Load (JEDEC method)	$I_{FSM}$	200				A		
Maximum Instantaneous Forward Voltage at 8 A	$V_F$	0.55	0.75	0.90		V		
Maximum Instantaneous Reverse Current $T_A = 25^\circ C$ at Rated DC Reverse Voltage $T_A = 100^\circ C$	$I_R$	0.5 50				mA		
Typical Thermal Resistance <sup>(2)</sup>	$R_{\theta JA}$	20				°C/W		
Operating Junction Temperature Range	$T_j$	-55 ~ +150				°C		
Storage Temperature Range	$T_{stg}$	-55 ~ +150				°C		


<sup>(1)</sup> Measured at 1 MHz and applied reverse voltage of 4 V D.C.

<sup>(2)</sup> P.C.B. mounted with 2.0" X 2.0" (5 X 5 cm) copper pad areas.

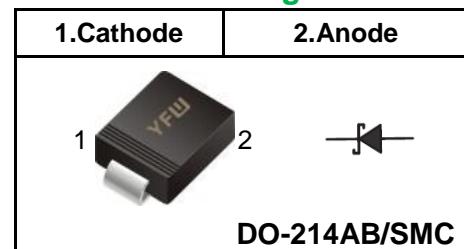
**Pinning**

**Marking Code**

<b>SS1045C</b>	<b>SS1045</b>
<b>SS1060C</b>	<b>SS1060</b>
<b>SS10100C</b>	<b>SS10100</b>
<b>SS10200C</b>	<b>SS10200</b>

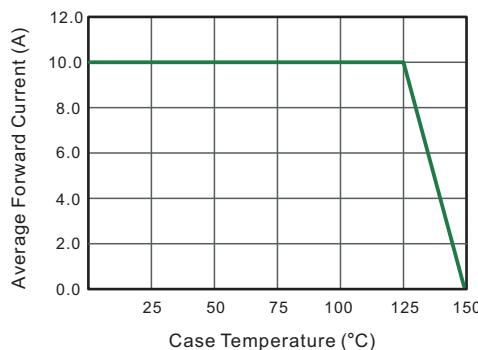
**Fig.1 Forward Current Derating Curve**

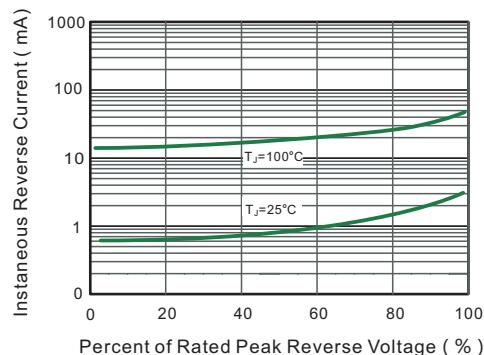


**Fig.2 Typical Reverse Characteristics**




**Fig.3 Typical Forward Characteristic**

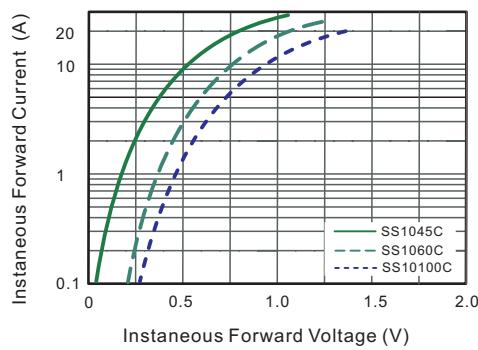

**Fig.4- Typical Transient Thermal Impedance**

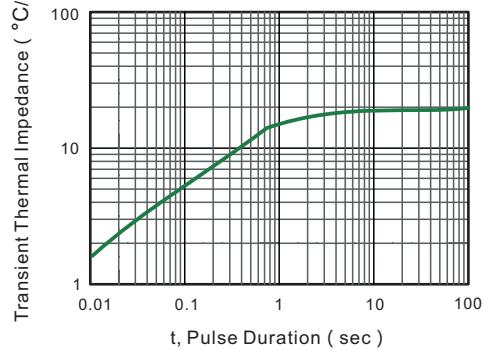



**Fig.5 Maximum Non-Repetitive Peak Forward Surge Current**

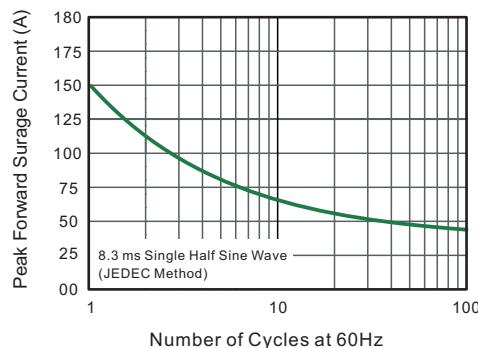

**Package Outline**


**DO-214AB SMC**

Plastic surface mounted package; 2leads

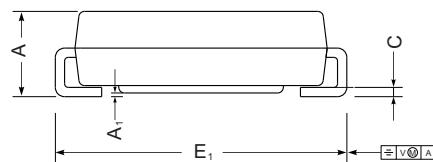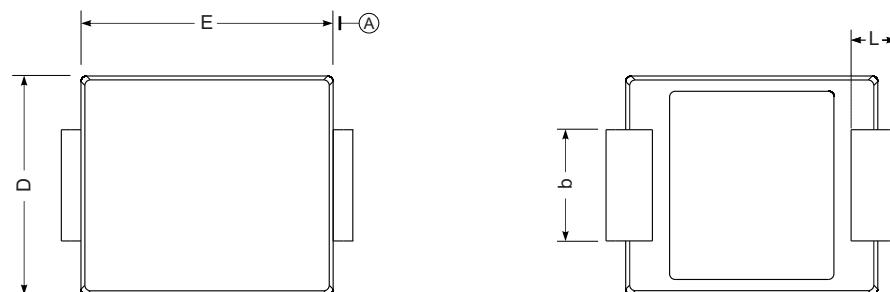

UNIT		A	E	D	E <sub>1</sub>	A <sub>1</sub>	C	L	b
mm	max	2.62	7.0	6.2	8.0	0.21	0.31	1.6	3.25
	min	2.00	6.5	5.6	7.6	0.05	0.15	0.9	2.75
mil	max	103	276	244	315	8.3	12	63	128
	min	79	256	220	299	2.0	5.9	35	108

**The recommended mounting pad size**

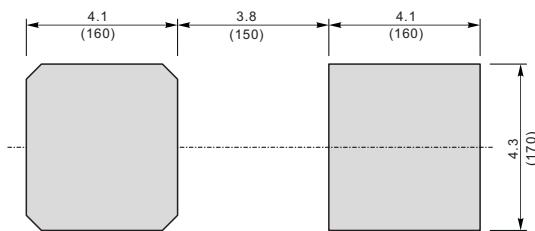

Unit :  $\frac{\text{mm}}{(\text{mil})}$

**Summary of Packing Options**

Package	Packing Description	Packing Quantity	Industry Standard
DO-214AB SMC	Tape/Reel,13"reel	3000	EIA-481-1