

SYM	ECN No.	MODIFICATION	DATE	ISSUED

Note:

1.Material:

1.1,Housing: High temperature thermoplastic with/black G/F,UL94v-0

1.2,Contact: copper alloy,t=0.25mm

1.3,Shell: copper/Ferroalloy alloy,t=0.30mm

2.Specification:

2.1,Current rating:1.5A Max.

2.2,Dielectric withstanding

voltage: 100 V(ac) for 1 min.

2.3,Contact resistance: 30 mΩ Max.

2.4,Insulation resistance: 100 MΩ Min.

2.5,Total mating force: 3.57 Kg Max.

2.6,Total unmating force: 1.0 Kg Min.

3.Finish:

3.1,Contact: Plated Gold in Mating Area:

Tin On Solder Tails

Shell: Nickel Plating

4.Environmental:

4.1,Temperature range: -55°C~85°C

PART ON:

914-42XAXXX1D1XX

电镀规格: 02, 镀金1u" 04, 镀金3u"
07, 镀金15u" 08, 镀金30u"

端子材质: 1, 青铜 2, 磷铜

端子规格: D, 90度 Y, 180度 S, SMT贴板

塑胶形态: 1, 苹果款 2, 苹果款打码

塑胶颜色: 01, 白色 02, 黑色 03, 本色

塑胶材质: 1, PBT 2, LCP 3, PA9T 4, PPA 5, PA6T

对插方向: A, 正向

外壳材质: 1, 铁壳 2, 铜壳

插口类型: 2, 无边方弹 4, 无边尖弹 8, 无边底无弹


9, 无边大小弹

外壳脚型: 1, 10.0两脚鱼叉 2, 10.6两脚鱼叉 3, 前两脚锥形

4, 四脚锥形 5, 前两脚贴板

类别: 苹果款

PCB LAYOUT

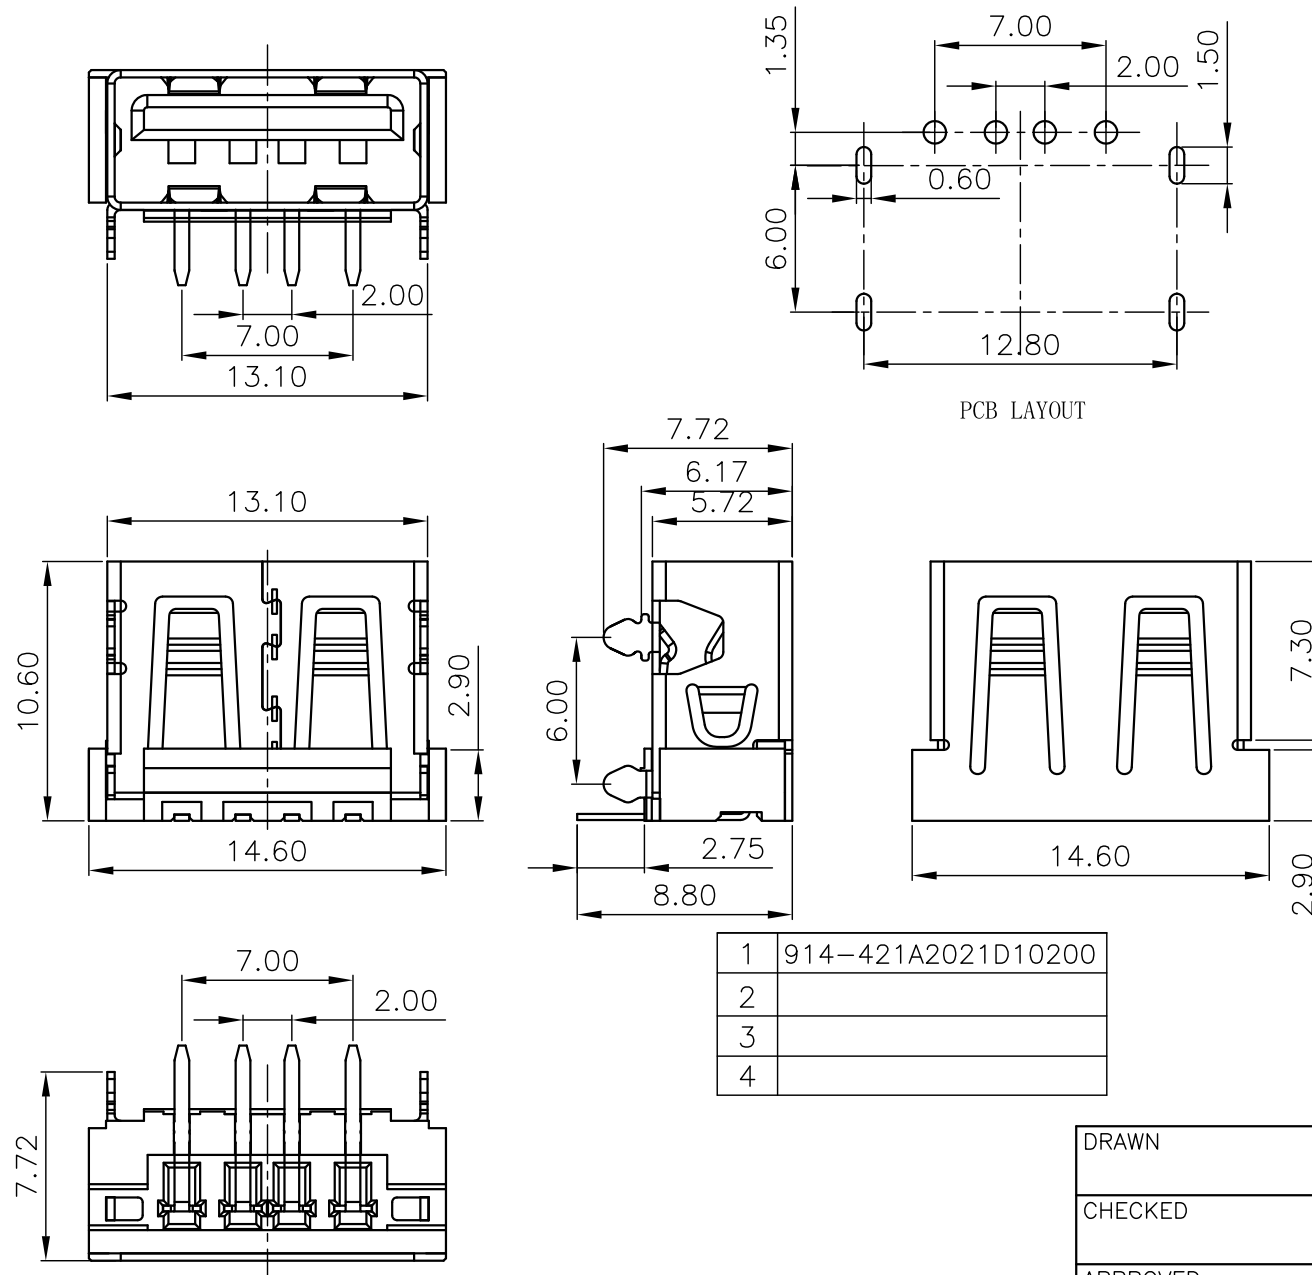


1	914-421A2021D10200
2	
3	
4	

DRAWN

CHECKED

APPROVED



3rd ANGLE PROJECTION

UNIT
mm

JTY 深圳市精拓金电子有限公司

TITLE

AF10.6苹果款四脚方弹铁壳

LCP黑胶DIP

TOLERANCE

.XXX±.10, .XX±.20, .X±.25, ANG±5°

PART NO.

914-421A2021D10200

DRAWING NO.

R914421A1011D102

SCALE

1:1

SHEET

1 OF 1

SIZE

A4

REV.

X1