


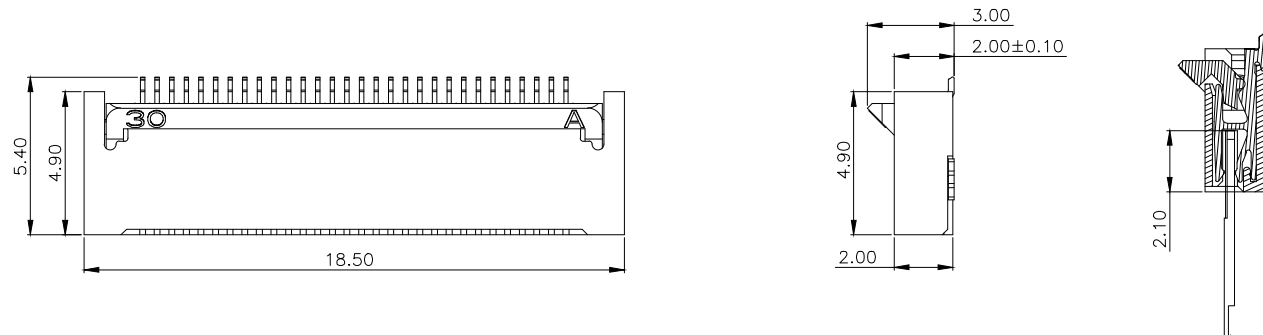

NOTES:

额定电流 Current rating: 0.5A


额定电压 Voltage rating: 50V

耐电压 Withstand voltage: 500V AC/minute

接触电阻 Contact resistance :≤40mΩ


绝缘电阻 Insulation resistance: 100MΩ MIN

工作温度 Working temperature: -25℃ ~ +85℃

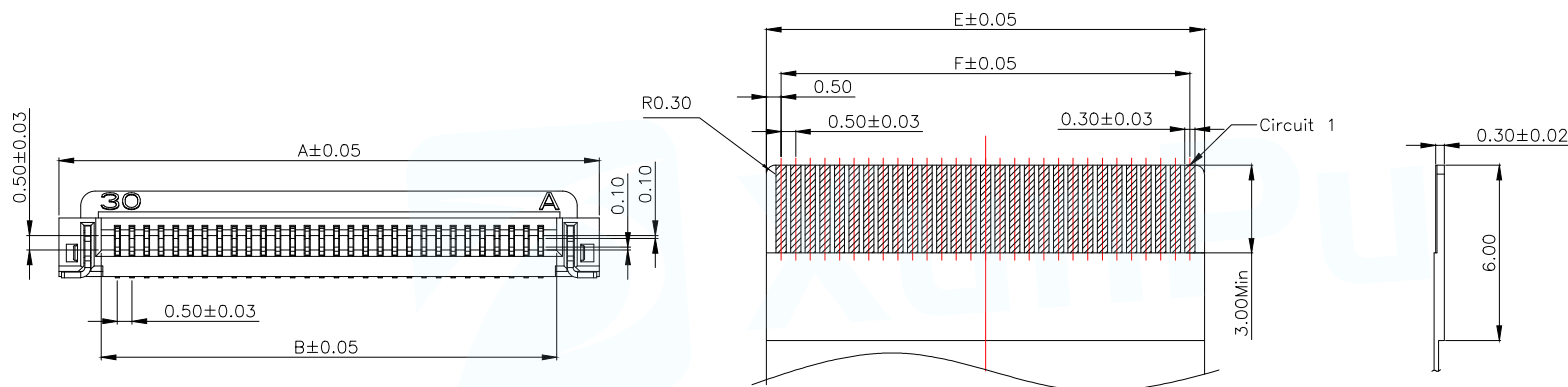

RECOMMENDED FPC/FFC DIMENSION

Part No	Pin	A	B	C	D	E	F
FPC-05FB-6PH20	6	6.5	3.6	2.5	5.6	3.5	2.5
FPC-05FB-8PH20	8	7.5	4.6	3.5	6.6	4.5	3.5
FPC-05FB-10PH20	10	8.5	5.6	4.5	7.6	5.5	4.5
FPC-05FB-12PH20	12	9.5	6.6	5.5	8.6	6.5	5.5
FPC-05FB-20PH20	20	13.5	10.6	9.5	12.6	10.5	9.5
FPC-05FB-24PH20	24	15.5	12.6	11.5	14.6	12.5	11.5
FPC-05FB-26PH20	26	16.5	13.6	12.5	15.6	13.5	12.5
FPC-05FB-30PH20	30	18.5	15.6	14.5	17.6	15.5	14.5
FPC-05FB-32PH20	32	19.5	16.6	15.5	18.6	16.5	15.5
FPC-05FB-36PH20	36	21.5	18.6	17.5	20.6	18.5	17.5
FPC-05FB-40PH20	40	23.5	20.6	19.5	22.6	20.5	19.5
FPC-05FB-50PH20	50	28.5	25.6	24.5	27.6	25.5	24.5
FPC-05FB-60PH20	60	33.5	30.6	29.5	32.6	30.5	29.5

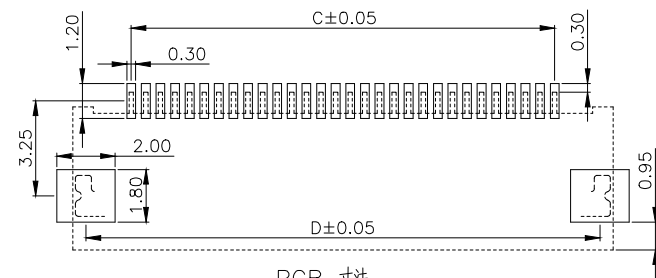PCB 寸法
PCB Layout

MANUFACTURE DWG		东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd	
UNLESS OTHERWISE SPECIFIED TOLERANCES		TITLE: FPC 0.5PH H2.0 后翻双面接	
		PAR	FPC-05FB-NPH20
DECIMALS:	ANGLES:	DWN	
.X:±0.35	.X':±3°	CHKD	
.XX:±0.25	.XX':±2°	APVD	
.XXX:±0.15		SCALE 1:1	UNIT:MM
CUSTOMER COPY		SIZE:A4	SHEET:1F1