

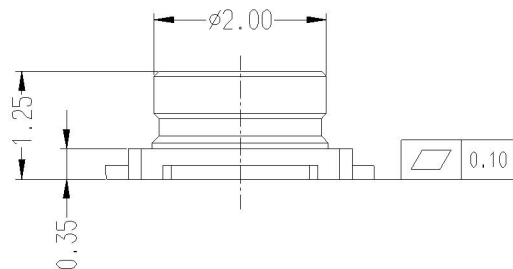


HF


RoHS

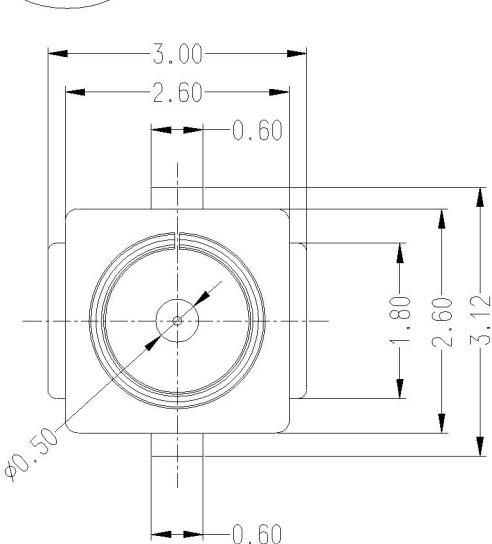

无倒角

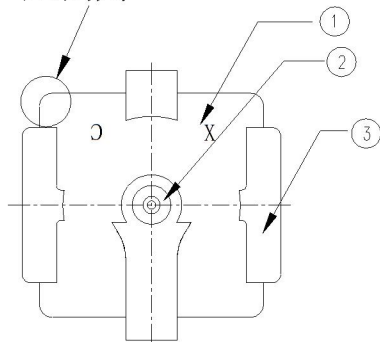

倒角

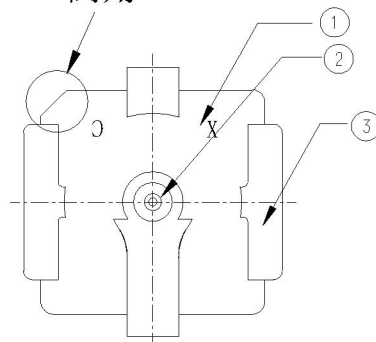

AN B 0 200 * - 1 2 *


AN=ANTENNA
B=BOARD END
0=产品编码
200=包圆直径
*=电镀规格
1=GOLD FLASH
2=NI PLATING
3=Ag PLATING

3=无倒角
4=有倒角
2=厂内区别码
1=第一代

NOTES:

- FREQUENCY RANGE:
DC TO 6GHZ (VSWR: 1.3MAX AT 0.1~3GHZ, 1.5MAX AT 3~6GHZ)
- CHARACTERISTIC IMPEDANCE: 50Ω (NOMINAL);
- TEMPERATURE: -40°C TO $+90^{\circ}\text{C}$;
- RATED VOLTAGE : 60VAC;
- CONTACT RESISTANCE :
 $20\text{m}\Omega$ MAX. (SIGNAL CONTACT)
 $10\text{m}\Omega$ MAX. OHM MAX. (GROUND CONTACT)
- WITHSTAND VOLTAGE : 200VAC FOR 1 MINUTE MIN;
- INSULATION RESISTANCE : $500\text{M}\Omega$ MIN. AT 100VDC;
- THIS COMPONENT IS HALOGEN FREE.





Rev.	DATE	APPD
A	2012/12/25	IVAN WANG
B	2016/12/29	Eli Duan

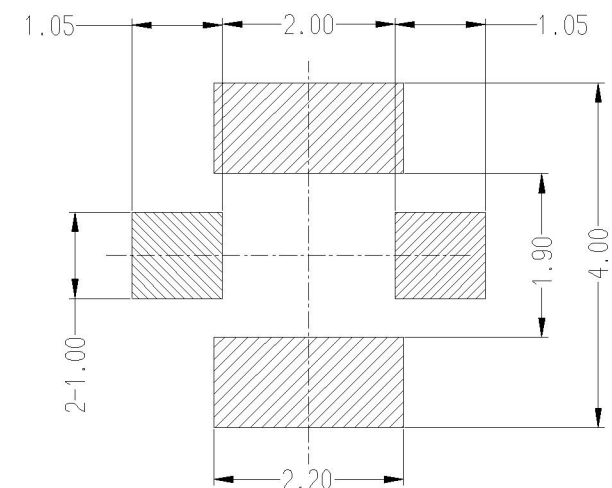

SIGNAL CONTACT GROUND CONTACT

P.C.B DIMENSION (TOP VIEW)
(TOLERANCE ± 0.05)

3	GROUND CONTACT	1	COPPER ALLOY	Au PLATED OVER Ni PLATED OVERALL. Ag PLATED OVER Ni PLATED OVERALL.
2	SIGNAL CONTACT	1	COPPER ALLOY	GOLD FLASH OVER Ni PLATED OVERALL.
1	HOUSING	1	THERMOPLASTIC	UL94V-0
ITEM	NAME	Q'TY	MATERIAL $\triangle$	FINISH $\triangle$
TOLERANCES UNLESS OTHERWISE SPECIFIED				
X.	/	.XXX	/	
.X	± 0.15	X. $^{\circ}$	$\pm 1^{\circ}$	
.XX	± 0.10	X. $^{\circ}$	$\pm 0.5^{\circ}$	
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF KUNSHAN COCENTRA ELECTRONICS Co.LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF KUNSHAN COCENTRA ELECTRONICS Co.LTD.				
L&X 深圳市连欣科技有限公司				
SERIES: RF BOARD END			TITLE: RF 1G H TYPE BOARD END	
APPD: Eli Duan 2016/12/29			PART No.: ANB0200*-12*	
CKD:			DWG No.: 307-0000-1002	
DR: 彭佳 2016/12/29				
UNITS MM		MAT'L $\triangle$	FINISH $\triangle$	SCALE 1:1
				SHEET 1/1
				REV. B

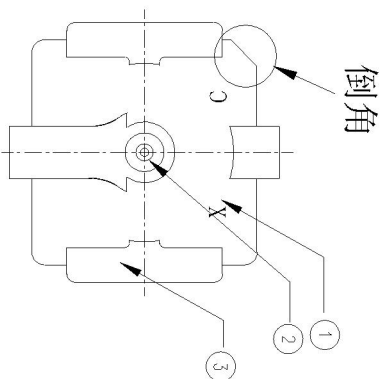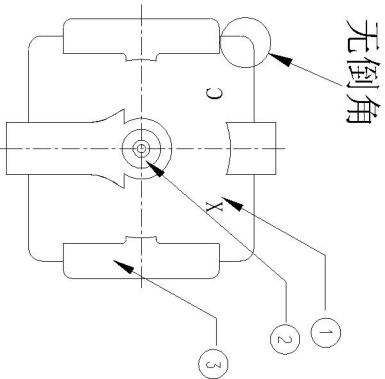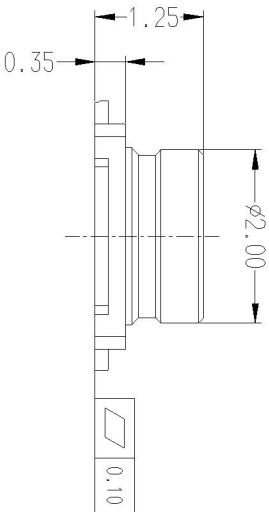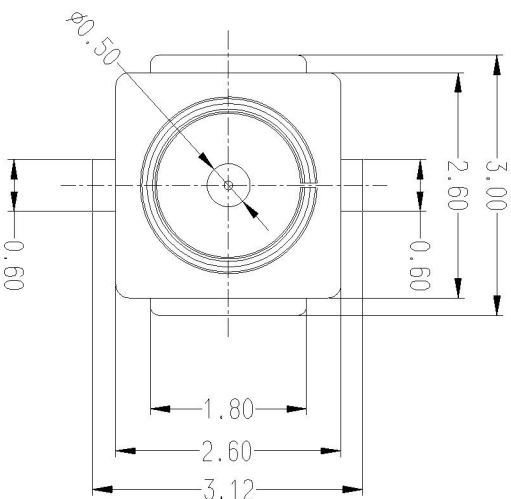

AN B 0 200 * - 1 2 *


AN=ANTENNA
B=BOARD END
0=产品编码
200=包圆直径
*=电镀规格

1=GOLD FLASH
2=NI PLATING
3=Ag PLATING

3=无倒角
4=有倒角
2=厂内区别码
1=第一代

NOTES:

1. FREQUENCY RANGE:
DC TO 6GHz (VSWR: 1.3MAX AT 0.1~3GHz, 1.5MAX AT 3~6GHz)
2. CHARACTERISTIC IMPEDANCE: 50Ω (NOMINAL);
3. TEMPERATURE: -40° C TO +90° C;
4. RATED VOLTAGE : 60VAC;
5. CONTACT RESISTANCE :
20mΩ MAX. (SIGNAL CONTACT)
10mΩ MAX. (GROUND CONTACT)
6. WITHSTAND VOLTAGE : 200VAC FOR 1 MINUTE MIN;
7. INSULATION RESISTANCE : 500MΩ MIN. AT 100VDC;
8. THIS COMPONENT IS HALOGEN FREE.

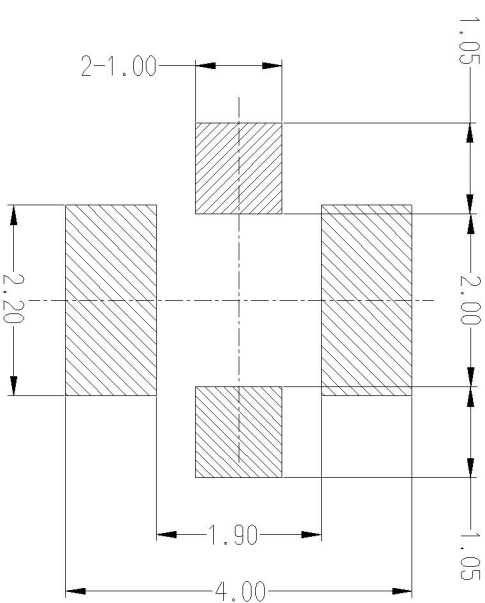

SIGNAL CONTACT GROUND CONTACT

P.C.B DIMENSION (TOP VIEW)
(TOLERANCE ±0.05)

3	GROUND CONTACT	1	COPPER ALLOY	Au PLATED OVER Ni PLATED OVERALL.		
2	SIGNAL CONTACT	1	COPPER ALLOY	Ag PLATED OVER Ni PLATED OVERALL.		
1	HOUSING	1	THERMOPLASTIC	GOLD FLASH OVER Ni PLATED OVERALL.		
ITEM	NAME	Q'TY	MATERIAL	FINISH		
TOLERANCES UNLESS OTHERWISE SPECIFIED				L&X 深圳市连欣科技有限公司		
X.	/	.XXX	/	SERIES: RF BOARD END TITLE: RF 16 H TYPE BOARD END		
.X	±0.15	X.°	±1°	APPD: Eli Duan 2016/12/29 PART No.: ANB0200*-12*		
.XX	±0.10	X°	±0.5°	CKD: DR: 彭佳 2016/12/29 DWG No.: 307-0000-1002		
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF KINSHAN COCENTRA ELECTRONICS Co.,LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF KINSHAN COCENTRA ELECTRONICS Co.,LTD.				UNITS MAT'L FINISH SCALE SHEET REV.		
				MM  		
				1:1 1/1 B		

Rev.	DATE	APPD
A	2012/12/25	IVAN WANG
B	2016/12/29	Eli Duan

L&X 深圳市连欣科技有限公司