


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.9.13	阿树

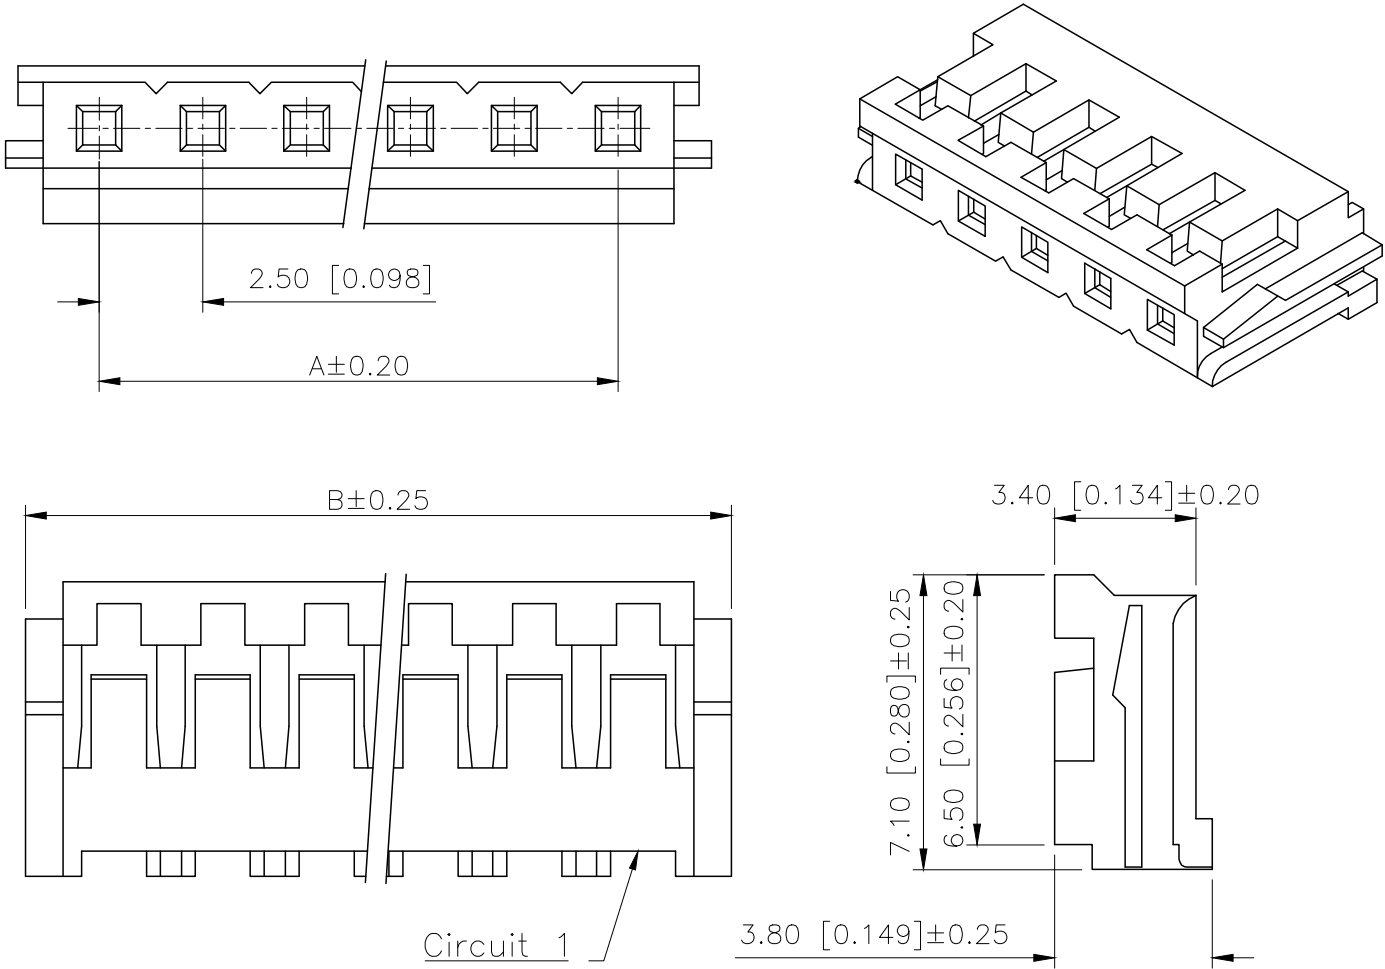

- SPECIFICATIONS
- Voltage rating:250V AC/DC
 - Current rating:3A AC/DC
 - Withstanding Voltage:800V AC/minute
 - Temperature range:−40°C~+125°C
 - Insulation resistance:≥1000MΩ
 - Contact resistance:≤10mΩ

PART NO.:

X2581 H-XX-N0
① ② ③ ④

- ①Series No
②Category:H-HSG
③Row No.Pin No:XX-02~15P
④Material:N0-PA66 UL94V-0

Poles	Dimensions(mm)		Poles	Dimensions(mm)	
	A	B		A	B
02	2.50	7.00	09	20.00	24.50
03	5.00	9.50	10	22.50	27.00
04	7.50	12.00	11	25.00	29.50
05	10.00	14.50	12	27.50	32.00
06	12.50	17.00	13	30.00	34.50
07	15.00	19.50	14	32.50	37.00
08	17.50	22.00	15	35.00	39.50

X2581H-XX-N0	PA66	X2581W	X2581T
PART NO	Material	Suitable XKB Wafer	Suitable XKB Terminal

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:	MODEL TYPE: 2.50mm Crimp Style Connectors
CHECKED		UNIT: mm/in	PART NO.: X2581H-XX-N0
APPROVED		SIZE: A4	DWG NO.: