

Actuator

17-030351

Distribution by
DigiKey**DigiKey**<https://digikey.eao.com/p/17-030351>

Your product:



17-030351 Actuator

FRONT

Reflector:	Metal, polished chromium-plated, internal
Front form:	round
Front dimension:	Ø 7 mm

MOUNTING

Design:	raised
Mounting cut-out:	Ø 6 mm

OPERATING-/INDICATION PART

Illumination colour:	Green
-----------------------------	-------

ELECTRICAL CHARACTERISTICS

Operating voltage:	24 V AC/DC ± 10 %
Polarity:	Anode (+) Brass plug-in connector Cathode (-) Brass tinned plug-in connector
Operation current:	15 mA ± 15 %
Lumi. Intensity:	6 mcd

MECHANICAL CHARACTERISTIC

Weight:	0.003 kg
Tightening torque:	Fixing nut max. 0.2 Nm
Terminal:	Plug-in terminal, 2 x 0.5 mm

AMBIENT CONDITION

Storage temperature: – 25 °C ... + 80 °C

Operating temperature: – 20 °C ... + 60 °C

IP Protection: IP40 front side, IP65 front side, according to IEC 60529

CERTIFICATE

Conformities: 2011 / 65 / EC (RoHS), 2014 / 35 / EU (230 VAC)

Approbations: UL


OTHER

Short Description: Actuator, Ø 6 mm, Ø 7 mm, round, Plug-in terminal, 2 x 0.5 mm, Green


Hints: Connectors: Brass terminal = anode (+); brass tinned terminal = cathode (-), IP67 front side gap between LED and reflector and gap between reflector and frontplate sealed to IP67 when using the supplied gasket., The plastic is limited resistant to chemicals.

Kind of illumination: Single-LED

Mounting cut-outs:

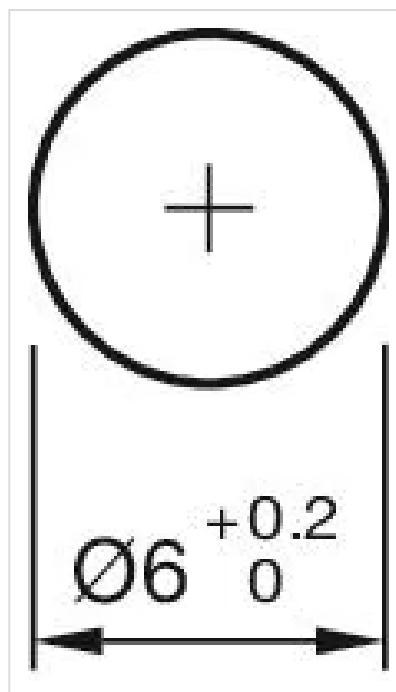

Dimension drawings:

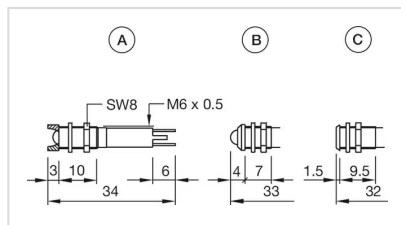

A = interior
B = exterior
C = superflat

Wiring diagrams:

