



Relays & Contactors > Relays > Power Relays



Relay Type: **General Purpose Power Relay**  
Coil Magnetic System: **Monostable**  
Coil Power Rating DC: **.17 W**  
Coil Resistance: **3390 Ω**  
Coil Special Features: **UL Coil Insulation Class F**

Features

Product Type Features

|            |                             |
|------------|-----------------------------|
| Relay Type | General Purpose Power Relay |
|------------|-----------------------------|

Configuration Features

|                         |                            |
|-------------------------|----------------------------|
| Coil Special Features   | UL Coil Insulation Class F |
| Contact Arrangement     | 1 Form A SPST-NO           |
| Contact Number of Poles | 1                          |

Electrical Characteristics

|                                                       |             |
|-------------------------------------------------------|-------------|
| Contact Limiting Making Current                       | 10 A        |
| Contact Limiting Short-Time Current                   | 6 A         |
| Contact Limiting Continuous Current                   | 10 A        |
| Insulation Initial Dielectric Between Contacts & Coil | 1000 Vrms   |
| Contact Limiting Breaking Current                     | 6 A         |
| Coil Power Rating DC                                  | .17 W       |
| Coil Resistance                                       | 3390 Ω      |
| Coil Voltage Rating                                   | 24 VDC      |
| Contact Current Rating                                | 6 A         |
| Contact Switching Load (Min)                          | 100mA @ 12V |
| Contact Switching Voltage (Max)                       | 400 VAC     |
| Contact Voltage Rating                                | 250 VAC     |

Body Features



|                |               |
|----------------|---------------|
| Product Weight | 6 g[.2116 oz] |
|----------------|---------------|

Contact Features

|                  |        |
|------------------|--------|
| Contact Material | AgSnO2 |
|------------------|--------|

Termination Features

|                        |                 |
|------------------------|-----------------|
| Relay Connection Type  | PCB Termination |
| Terminal Configuration | Solder Pins     |

Mechanical Attachment

|                    |                       |
|--------------------|-----------------------|
| Product Mount Type | Printed Circuit Board |
|--------------------|-----------------------|

Dimensions

|                                            |               |
|--------------------------------------------|---------------|
| Insulation Creepage Between Contact & Coil | 8 mm[.315 in] |
| Product Width                              | 15 mm[.59 in] |
| Product Length                             | 28 mm[1.1 in] |
| Product Height                             | 5 mm[.196 in] |

Usage Conditions

|                                         |               |
|-----------------------------------------|---------------|
| Environmental Category of Protection    | RTIII         |
| Environmental Ambient Temperature (Max) | 85 °C[185 °F] |

Operation/Application

|                      |             |
|----------------------|-------------|
| Current Type         | DC          |
| Solder Process       | Wave Solder |
| Coil Magnetic System | Monostable  |

Packaging Features


|                  |                  |
|------------------|------------------|
| Packaging Method | Box & Tube, Tube |
|------------------|------------------|

Other

|                                         |            |
|-----------------------------------------|------------|
| Length Class (Mechanical)               | 25 – 30 mm |
| Environmental Ambient Temperature Class | 70 – 85 °C |
| Coil Power Rating Class                 | .15 – .2 W |
| Width Class (Mechanical)                | 0 – 6 mm   |
| Contact Current Class                   | 16 A       |

Product Compliance

For compliance documentation, visit the product page on TE.com>





|                                               |                                                                                                                                 |
|-----------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| EU RoHS Directive 2011/65/EU                  | Compliant                                                                                                                       |
| EU ELV Directive 2000/53/EC                   | Compliant                                                                                                                       |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold                                                                                         |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JUNE 2024 (241)<br>Candidate List Declared Against: JUNE 2024 (241)<br>Does not contain REACH SVHC |
| Halogen Content                               | Not Low Halogen - contains Br or Cl > 900 ppm.                                                                                  |
| Solder Process Capability                     | Wave solder capable to 260°C                                                                                                    |

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 2-1416100-0  
ST3FLC4

Also in the Series | SCHRACK Slimline PCB Relay SNR

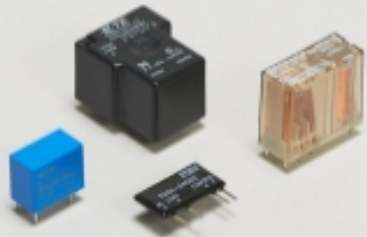

Power Relays(53)





Customers Also Bought

TE Part #1825057-7  
ADE0804=DIP SWITCH,EXT,THRU/HL

TE Part #5-2176337-3  
CRGCQ 0402 220K 1%

TE Part #292303-3  
Std USB Type A, R/A, T/H, Natural

TE Part #5510320002  
PD-CAP-1/8-0

TE Part #4-1618388-6  
LEV200A5NAA=RELAY, SPST-NO

TE Part #1393788-3  
V23079A1001B301

Documents

- CAD Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_7-1393236-5\_B.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_7-1393236-5\_B.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_7-1393236-5\_B.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

- Slim PCB Relay SNR

English

Product Specifications

- Definitions General Purpose Relays

English

Agency Approvals

- VDE Certificate

English

7-1393236-5

General Purpose Power Relay, Monostable, .17 W Coil, 3390 ohm Coil Resistance,  
SCHRACK Slimline PCB Relay SNR, Power Relays

