



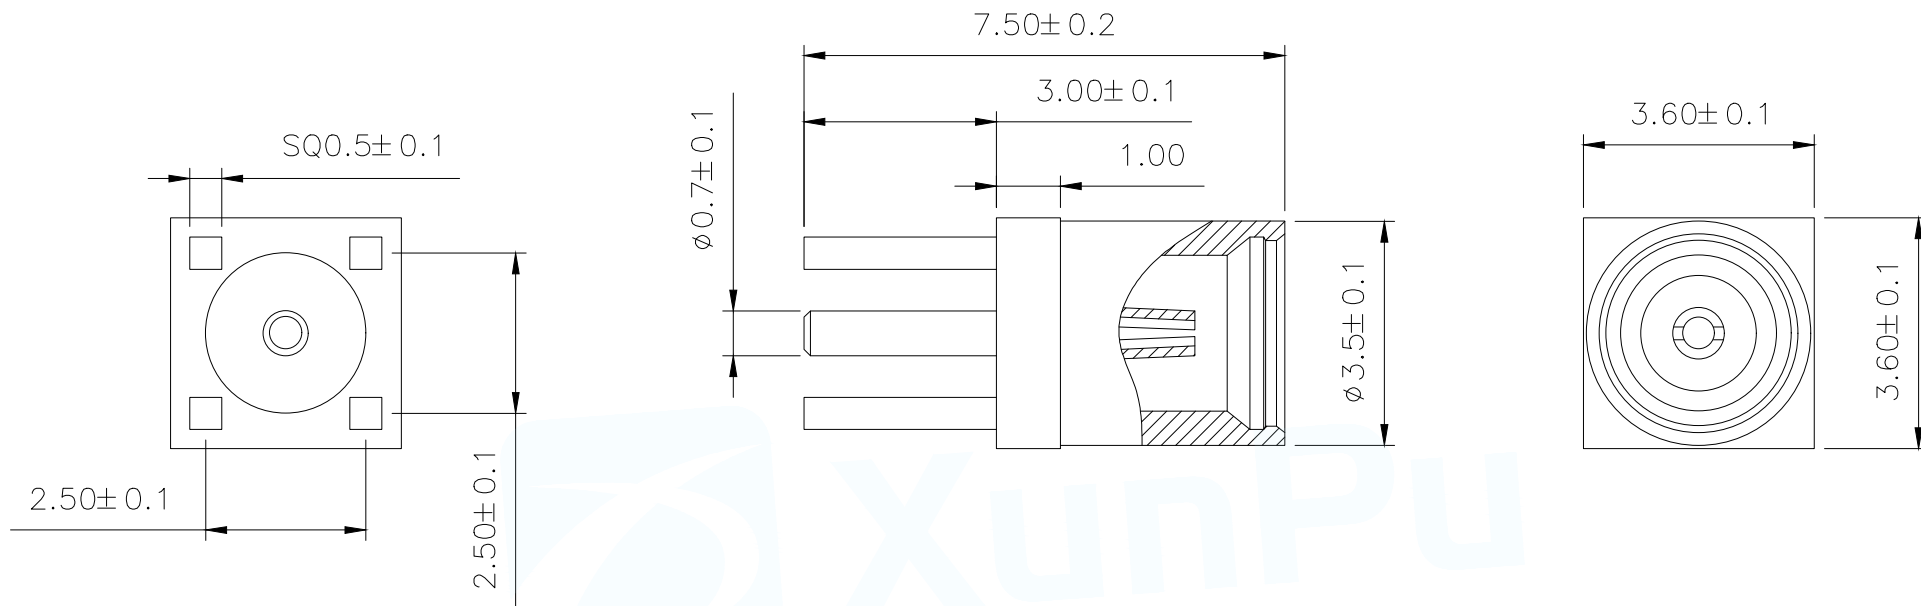

Technical requirements	
Characteristic impedance	50Ω
Frequency range	6GHZ
Contact resistance	
Inner conductor	≤5mΩ
Outer conductor	≤2.5mΩ
Standing ratio	
Straight	≤1.25/3GHz
Curved	≤1.25/3GHz
Withstand voltage	500V/50Hz
Insulated resistance	≥1000MΩ
Electrical resistance	≥500次
Appearance: no shift point burr scratch surface bright, no dirt, no deformation, etc	

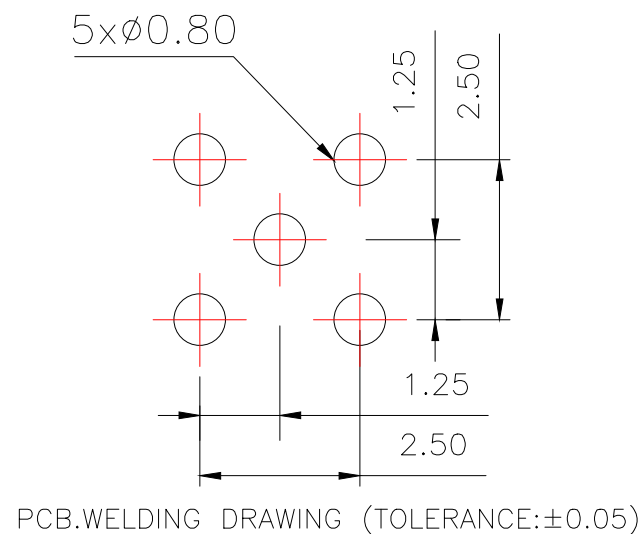

1	主体	1	黄铜	镀金
2	绝缘体	1	PTFE	
3	母针	1	黄铜	镀金
序号	名称	数量	材料	备注

MANUFACTURE DWG		 东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd		
UNLESS OTHERWISE SPECIFIED TOLERANCES		TITLE: 直插—母头—方3.6*H7.5		
DECIMALS:		PAR		
ANGLES:		DWN		
X.X±0.30		CHKD		
X.XX±0.20		APVD		
X.XXX±0.10		SCALE N:A		
CUSTOMER COPY		UNIT:MM		
		SIZE:A4		
		SHEET:1F1		
		REV:A		