

ROHS

REV.

ECN. #







DESCRIPTION

DATE

A0

NEW RELEASE

05/03/22

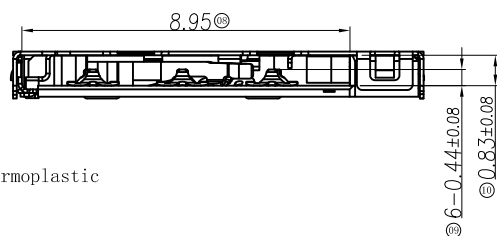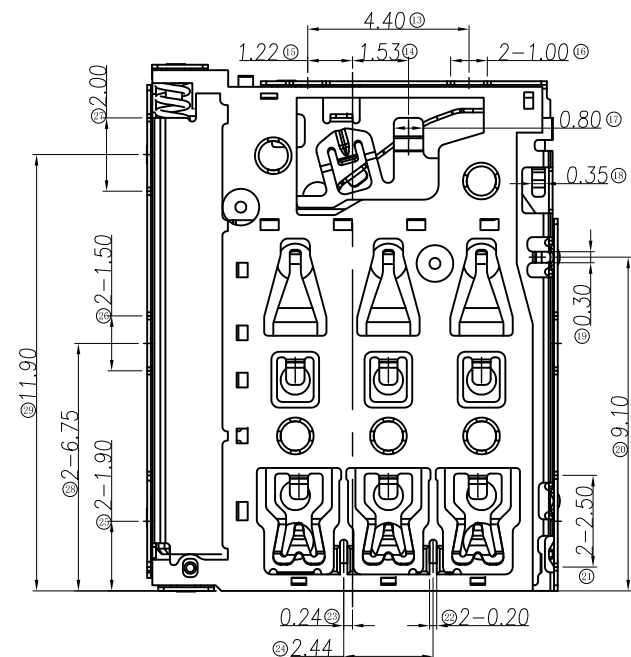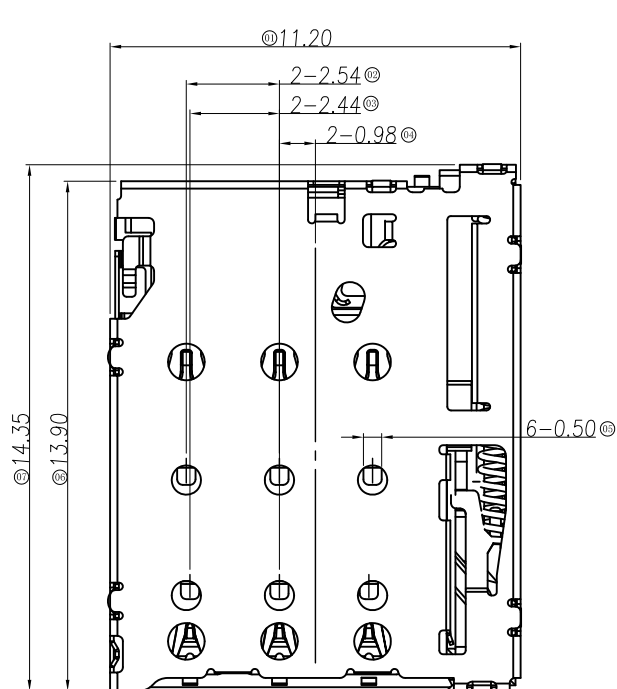

Notes:

1. Material:

Housing: High Temperature Thermoplastic
Terminal: Copper Alloy
Shell: Stainless Steel


2. Plating:

Terminal: 50u" Ni Underplated Overall
G/F Plated On Contact Area
G/F Plated On Solder Area
Shell: 30u" Ni Underplated Overall
G/F Plated On Contact Area And older Area

3. Technical Speciality:

Rated Voltage: 30V
Current Rating: 0.5A
Insulation Resistance: 1000MΩ Min.
Contact Resistance: 100mΩ Max.
Withstanding Voltage: 500V DC For 1 Minutes.
Operating Temperature: -40℃~+85℃ Humidity 80% R.H Max.

CIRCUIT DIAGRAM FOR DETECT SWITCHES



CARD INSERTED

WITHOUT CARD

MILLIMETERS	INCH
X. ° ±2°	X. ° ±2°
.X ±0.30	.X ±0.012
.XX ±0.20	.XX ±0.008
.XXX ±0.10	.XXX ±0.004

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF Dongguan JinBiLai Metal Plastic Technology Co., Ltd. COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF Dongguan JinBiLai Metal Plastic Technology Co., Ltd.







东莞市金比莱五金塑胶科技有限公司

DONGGUAN JBL TECH CO., LTD

TITLE	1. 25H Push-Push Nano-SIM卡座	DR		
PART NO.	102322824	CHKD		
PRO J.	PAGE	1/3	UNITS	mm
SIZE	A4	SCALE	1:1	DIS NO.
				NS003-000<客户图>

ROHS

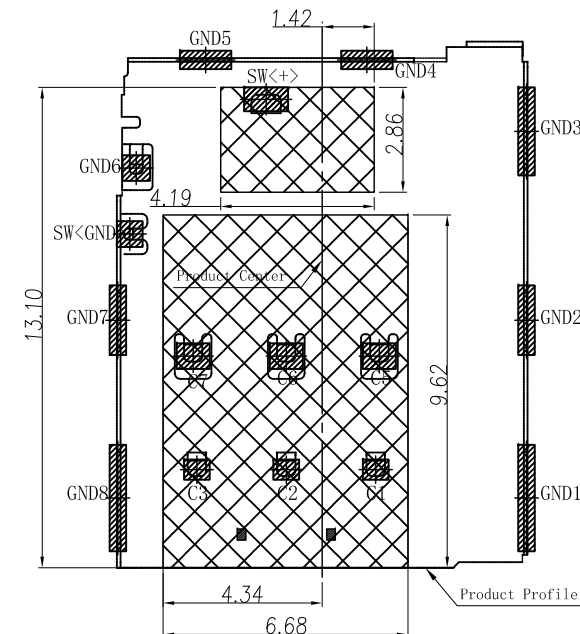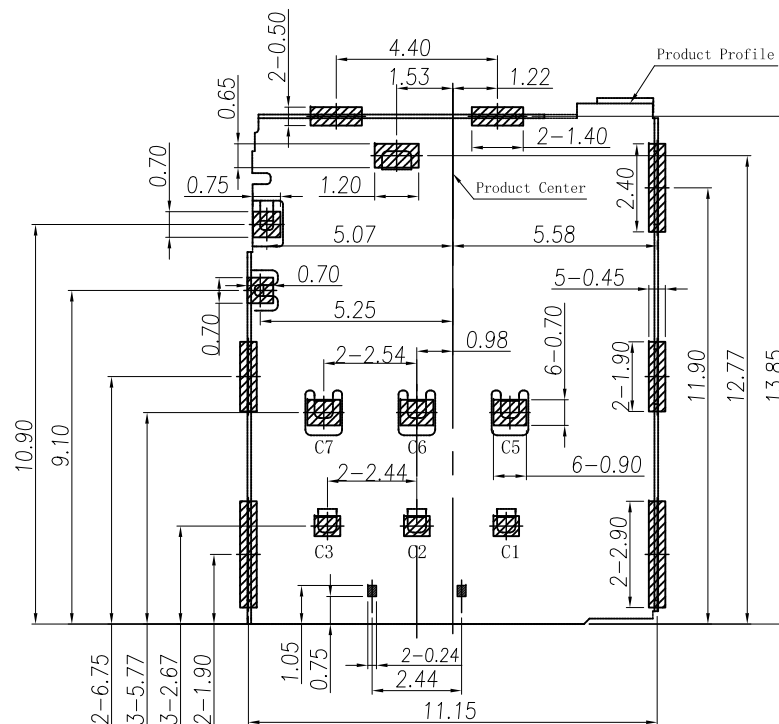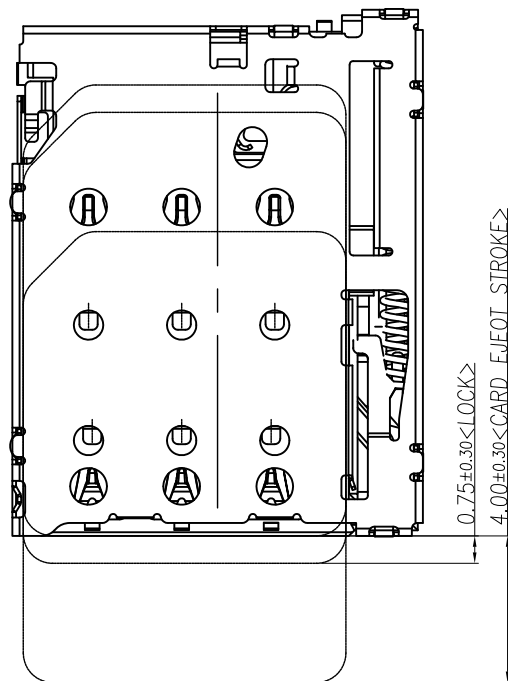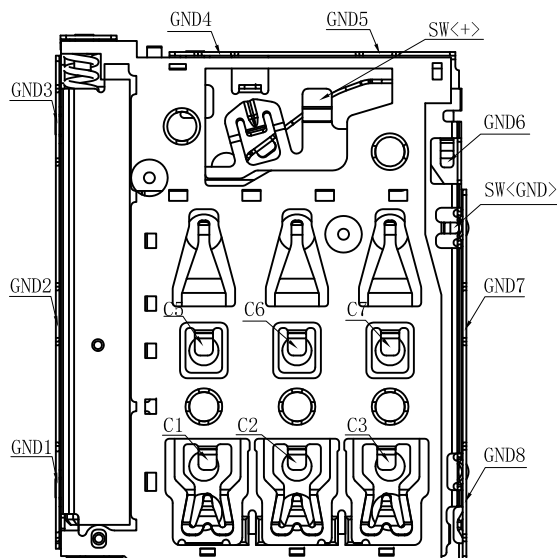


RECOMMENDED PCB LAYOUT<TOLERANCE: ±0.05>

RECOMMENDED METAL MASK T=0.12MM

SMT SOLDER AREA

COPPER RESTRICTED AREA

1. TOUCH AREA OF CONTACT TIPS NO ELECTRICAL FUNCTION
2. NO FIRST PCB LAYOUT CIRCUITS IN THE AREA

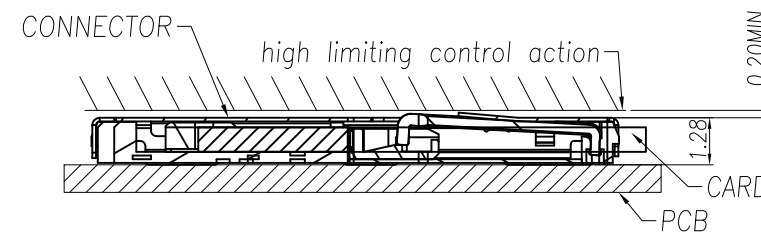

RECOMMENDED METHOD OF MATE

SCALE 1:1

PIN/NO	ASSIGNMENT
C1	VCC
C2	RST
C3	CLK
CD	Detect Switch
C5	GND
C6	VPP
C7	I/O

MILLIMETERS	INCH
X. ° ±2°	X. ° ±2°
.X ±0.30	.X ±0.012
.XX ±0.20	.XX ±0.008
.XXX ±0.10	.XXX ±0.004


THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DongGuan JinBilai Metal Plastic Technology Co., Ltd. COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DongGuan JinBilai Metal Plastic Technology Co., Ltd.



东莞市金比莱五金塑胶科技有限公司
DONGGUAN JBL TECH CO., LTD

TITLE	1.25H Push-Push Nano-SIM卡座	DR		
PART NO.	102322824	CHKD		
PRO J.	PAGE 2/3	UNITS mm	APPD	
SIZE A4	SCALE 1:1	DIS NO.	NS003-000<客户图>	


ROHS

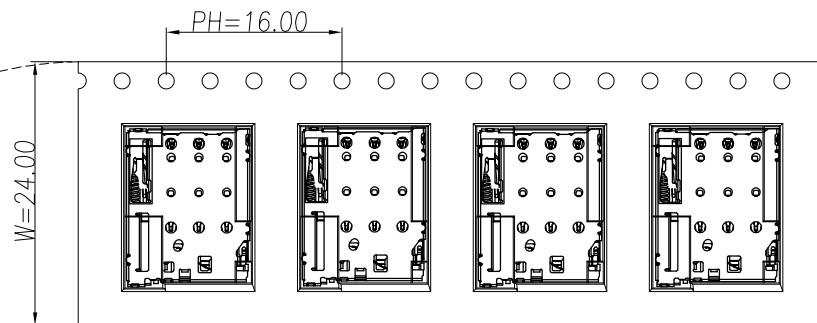Direction of use
→



NOTES:

1、Packing quantity per plate: 2000PCS/Plate

2、Loading and packing method

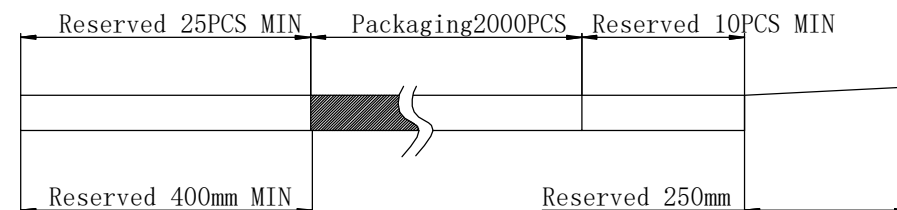

3、Total packaging: 20000PCS/Box

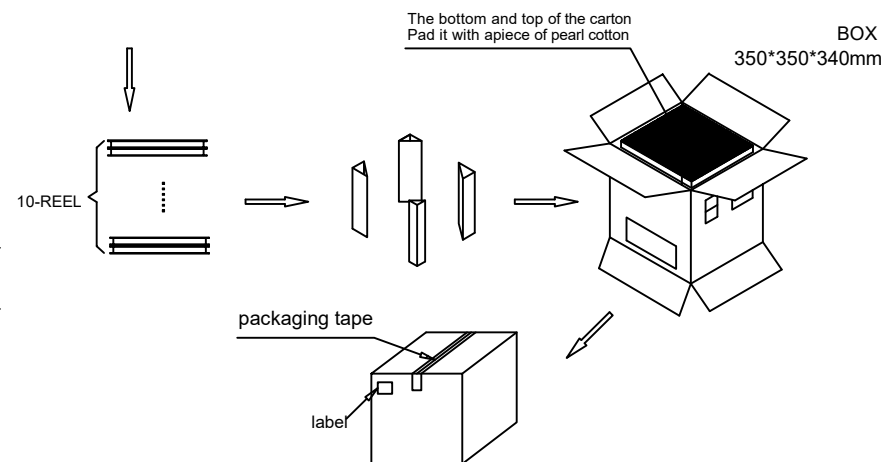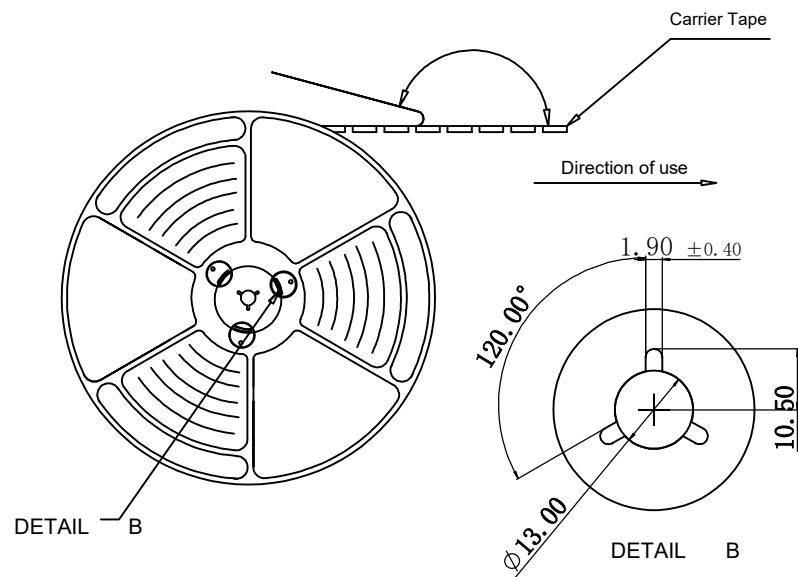

Part Number	Description	Quantity
303020114	Carrier band (Lucent, PS W=24 PH=16,T=0.3)	325.6m
303040009	Box (K=K,T=7.0,350*350*340)	1PCS
303060001	PE Bag (T=0.08mm, 730*760*730)	1PCS
303070024	Self-adhesive (W=21.30)	331.2m
303110001	Beam (K=K, T=7.0,95*95*290)	4PCS
303130001	Pearl Wool (340*340*18)	2PCS
303180017	REEL (BLUE, 13Inches*24mm, φ330)	10PCS
102322824	1.25H Push-Push Nano-SIM Card<NS003-000>	20000PCS

MILLIMETERS	INCH
X. ° ±2°	X. ° ±2°
.X ±0.30	.X ±0.012
.XX ±0.20	.XX ±0.008
.XXX ±0.10	.XXX ±0.004
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF Dongguan JinBiLai Metal Plastic Technology Co., Ltd. COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF Dongguan JinBiLai Metal Plastic Technology Co., Ltd.	



东莞市金比莱五金塑胶科技有限公司

DONGGUAN JBL TECH CO., LTD

TITLE	1.25H Push-Push Nano-SIM卡座	DR		
PART NUM.	102322824	CHKD		
PRO J.	PAGE 3/3	UNITS mm	APPD	
SIZE	A4	SCALE 1:1	DIS NO.	NS003-000<客户图>