REV	ECN NO	DESRIPTION	DESIGN	APPROVAL	DATE
A1	NEW	Replace frame			2020.06.12

ROHS

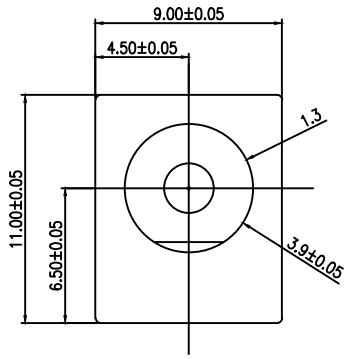

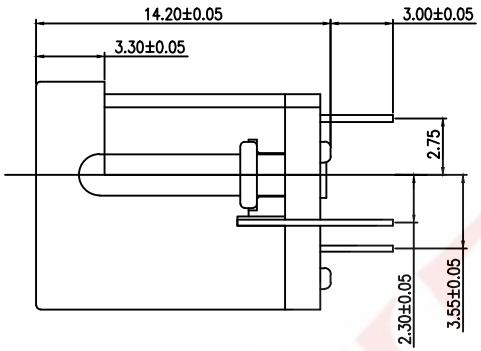



Main Technical Performance
1. Rated Electrical Load: DC24V 3A
2. Contact Resistance: ≤0.03Ω
3. Insulation Resistance: ≥100MΩ
4. Withstand Voltage: AC500V (50Hz)/min
5. Insertion and Extraction Force: 3～20N
6. Service Life: 5,000 cycles

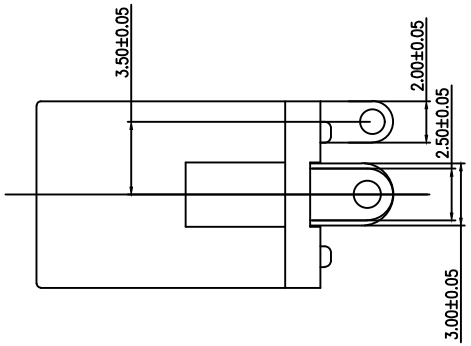

电路原理图



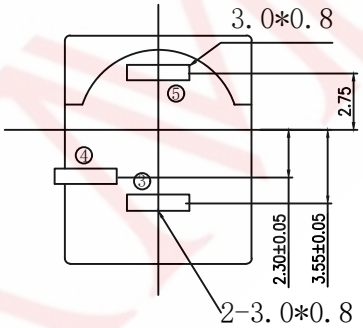

线路板开孔尺寸
TOP VIEW

9C L 3 140 B T D A

- Model Definition
- Mould Number: MX01213
- Needle Diameter: 1.3 mm
- Fixing Method: With Fixed Column
- Interface Method: Conventional Flared Opening
- Overall Length: 14.0 mm
- Pin Position: 3 Pin
- Mounting Method: Vertical DIP
- Product Series: DC Power Jacks

序号	名 称	数量	材 料	备 注
6	插 针	1	H59黄铜棒	镀银
5	平 片	1	H62黄铜带(Y) δ=0.30mm	镀银
4	弯 片	1	H62黄铜带(Y) δ=0.35mm	镀银
3	簧 片	1	磷铜 δ=0.30mm	镀银
2	后 盖	1	PPA	黑
1	基 座	1	PPA	黑

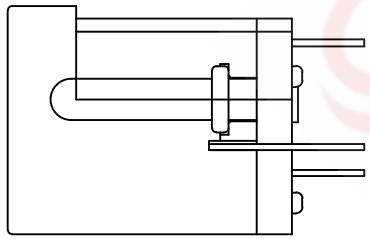

			GENERAL TOLERANCE	
			≥0~2<	±0.15
DESIGN	WANGGUIFA	2018.06.12	≥2~5<	±0.25
CHECKED	ZHENGUILAN	2018.06.12	≥0~2<	±0.15
APPROVED	LILIANJIANG	2018.06.14	≥5	±0.35

FIRST VIEW



SCALE	1:1	UNIT	mm

The copyright belongs to samzo parts [China] Co., Ltd. please use the material after samzo parts agree to authorize. The final right of interpretation belongs to samzo parts.
WWW.KKK-JP.COM

SAMZO COMPONENTS
Electronic switch and connector manufacturer

TITLE:: 大电流 立式 插件 四固定点
DWG NO: 9CL3140-A012
PART NO: 9CL3-2301213
MODEL NO: 9CL3140BTDA
NAME: DC JACK