


CONFIGURATION	PART NUMBER	LENGTH
CABLE ASSEMBLY, POWER, MOLDED, 9 POSITION, FLEX, STR TO STR	P27790	TBD

DIMENSIONS

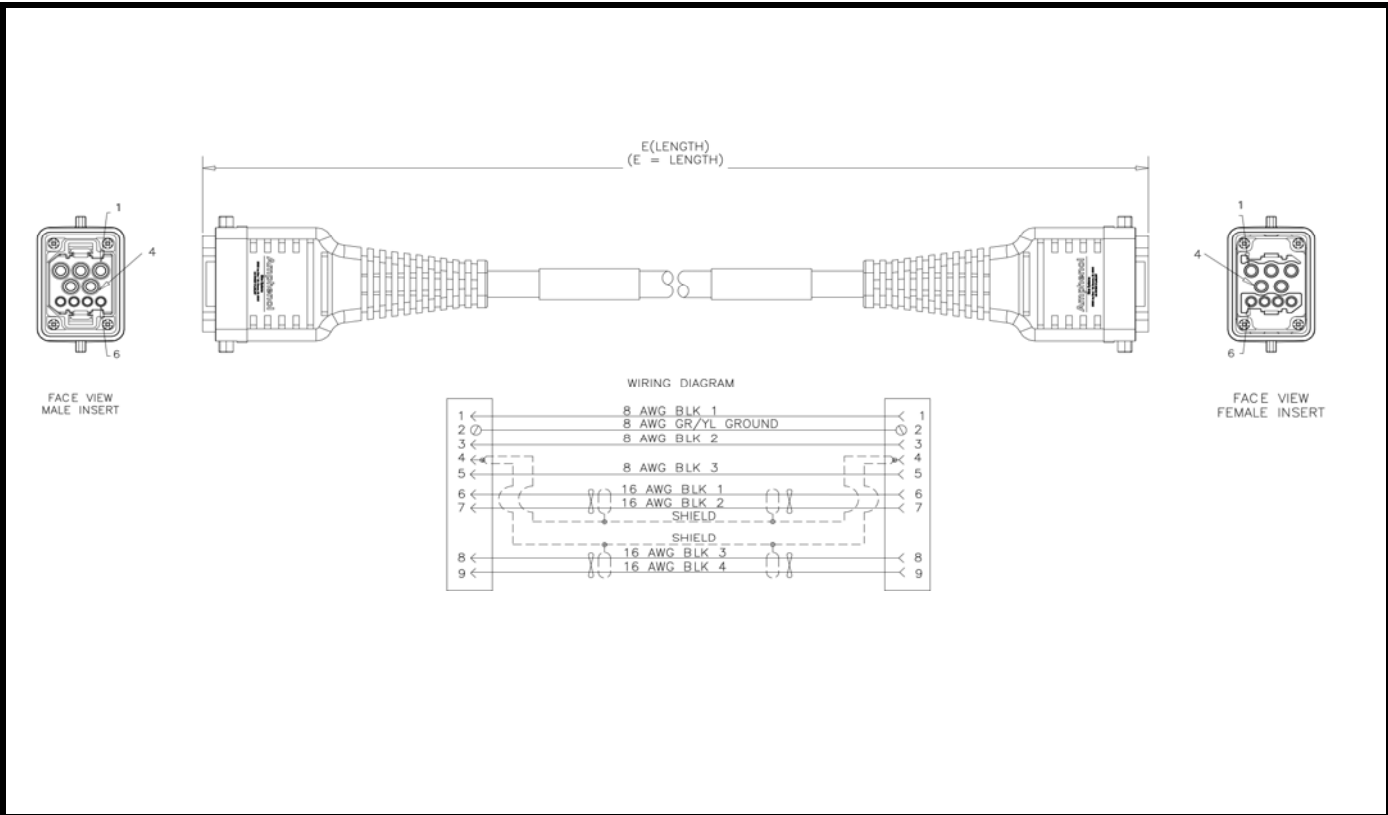

TECHNICAL DATA

TEMPERATURE RANGE:	-40C to +125C
NUMBER OF CONTACTS:	3/4 + PE + SHEILD
TERMINATION TECHNIQUE:	CRIMP
WIRE GAUGE:	8 AWG / 16 AWG 10 AWG / 16 AWG 12 AWG/ 16 AWG
APPROVALS:	UL, CSA
POWER AREA:	4 + PE RATED CURRENT TEMP: 40A, 40C
SIGNAL AREA:	4 RATED CURRENT TEMP: 10A, 40C

--

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[P27790-M12](#)