

Ordering Information:

A2508WR-XP - $\frac{***}{1} - \frac{**}{2} - \frac{*}{3} - \frac{*}{4} - \frac{*}{5}$

1.Part NO.

2.Style:

(Blank): Type 1

2: Type 2

3.Material:

(Blank):Nylon 66,UL94V-0

GWT: Nylon 66,UL94V-0,
IEC 60335-1,5th Edition
Glow Wire Capable.

6T:Nylon 6T,UL94V-0

4.Color:

(Blank):Ivory

RD:Red

YL:Yellow

BL:Blue

BK:Black

GN:Green

WH:White

LE:Light Blue

OR:Orange

GY:Gray

PK:Pink

BR:Brown

VI:Violet







LY:Lemon yellow

VY:Vivid yellow


5.Finish:

(Blank):Tin over Nickel

G:Gold over Nickel

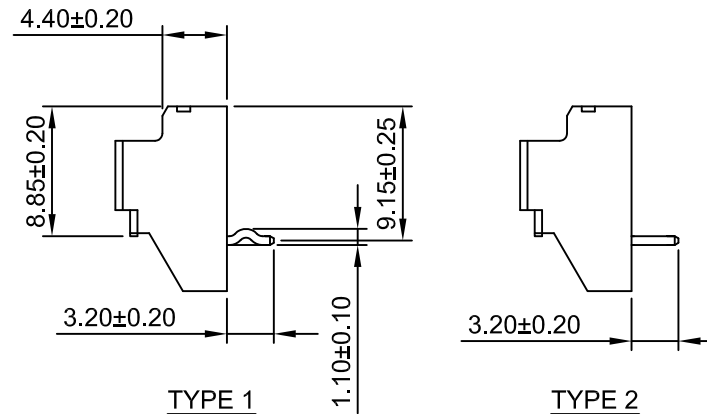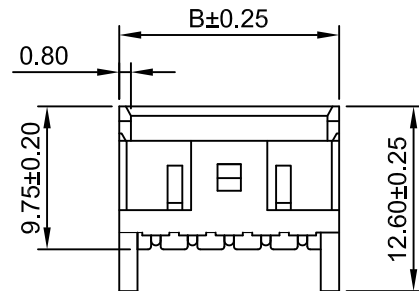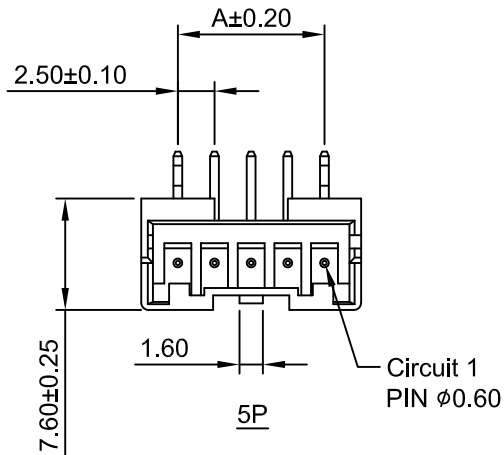

Detail C
Scale 2:1

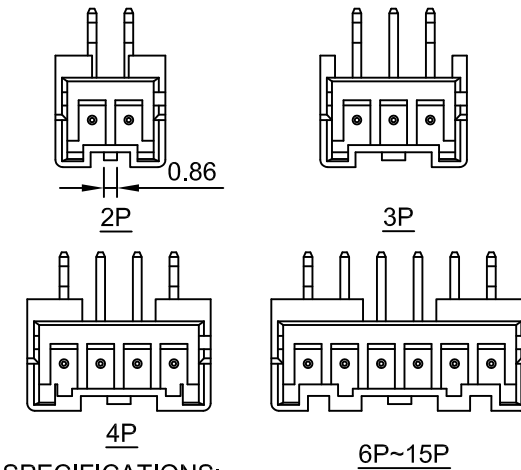

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 1000V AC/minute

Pin Material: Brass/Tin over Nickel

Material: Nylon66, UL94V-0(Ivory)

Ordering Information & Dimensions

Circuits	Dimensions (mm)		Circuits	Dimensions (mm)	
	A	B		A	B
A2508WR-2P	2.50	7.50	A2508WR-9P	20.00	25.00
A2508WR-3P	5.00	10.00	A2508WR-10P	22.50	27.50
A2508WR-4P	7.50	12.50	A2508WR-11P	25.00	30.00
A2508WR-5P	10.00	15.00	A2508WR-12P	27.50	32.50
A2508WR-6P	12.50	17.50	A2508WR-13P	30.00	35.00
A2508WR-7P	15.00	20.00	A2508WR-14P	32.50	37.50
A2508WR-8P	17.50	22.50	A2508WR-15P	35.00	40.00

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit		Scale		Sheet		TITLE	
mm		2:1		1 of 1		2.50mm PITCH RIGHT-ANGLE WAFER	
DRWN		CHK'D		APPR			
Chengbiao Ye		Diankui Wan		Jack Yin			
General Tolerances			THIRD ANGLE PROJECTION			DRAWING NO.	
x,xx±0.25						A2508WR-XP	
x,xx±0.20							
x,xxx±0.15							
ANGLES ±1°						REV A7	

A7	CHANGE THE DARWING	2023.03.06
A6	CHANGE THE INFORMATION	2023.02.22
A5	CHANGE THE INFORMATION	2022.10.11