
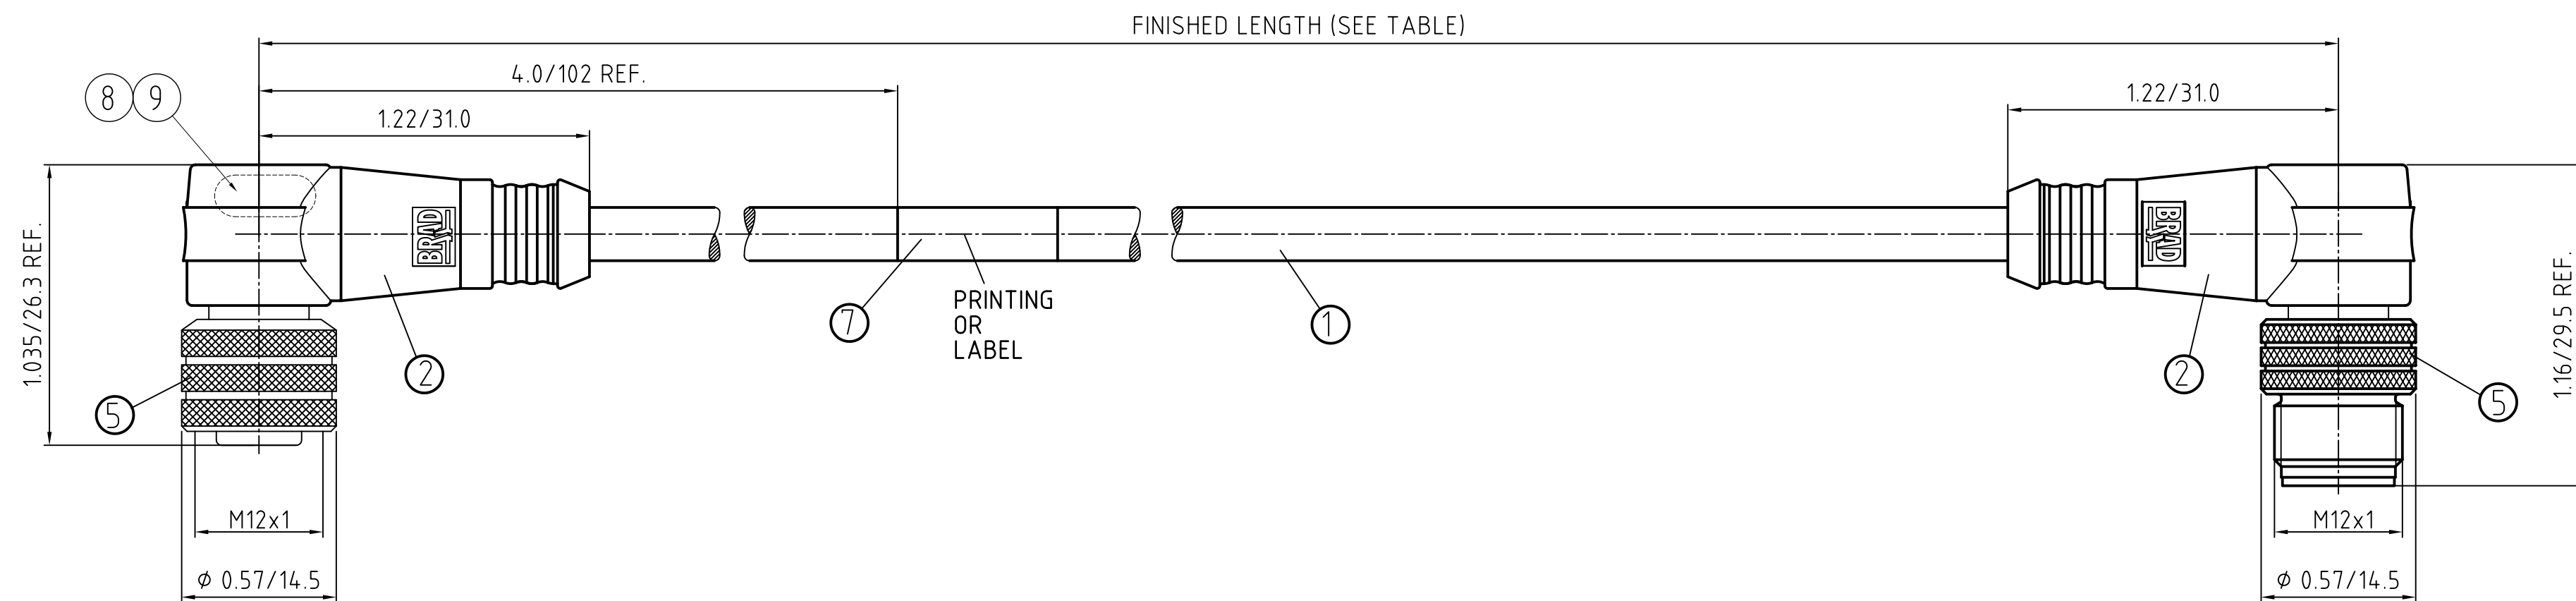


POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
3	1200675088	8830P9E03M010	3.28' +2.19" -0 [1.0M +55.6 -0]
POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
4	1200675248	8840P9E03M010	3.28' +2.19" -0 [1.0M +55.6 -0]

CONNECTOR SPECIFICATION:

VOLTAGE RATING	10 TO 30VDC
AMPERAGE RATING	max. 4 AMPS
PROTECTION	IP67
OPERATING TEMPERATURE	FLEXING: -5°C TO +80°C STATIC: -30°C TO +80°C

ITEM	COMPONENT	MATERIAL	FINISH
9	LED		GREEN
8	LED		YELLOW
7	LABLE	MYLAR	BLACK/YELLOW
6	O-RING	VITON	RED
5	COUPLER	BRASS	NICKEL PLATED
4	PIN CONTACT	COPPER ALLOY	GOLD OVER NICKEL
3	INSERT	PUR	BLACK
2	OVERMOLD	POLYURETHANE (PUR)	TRANSP.
1	CABLE- 22/3-4 (COPPER STRANDING) 3/4 CONDUCT. 300V	JACKET: PUR	BLACK

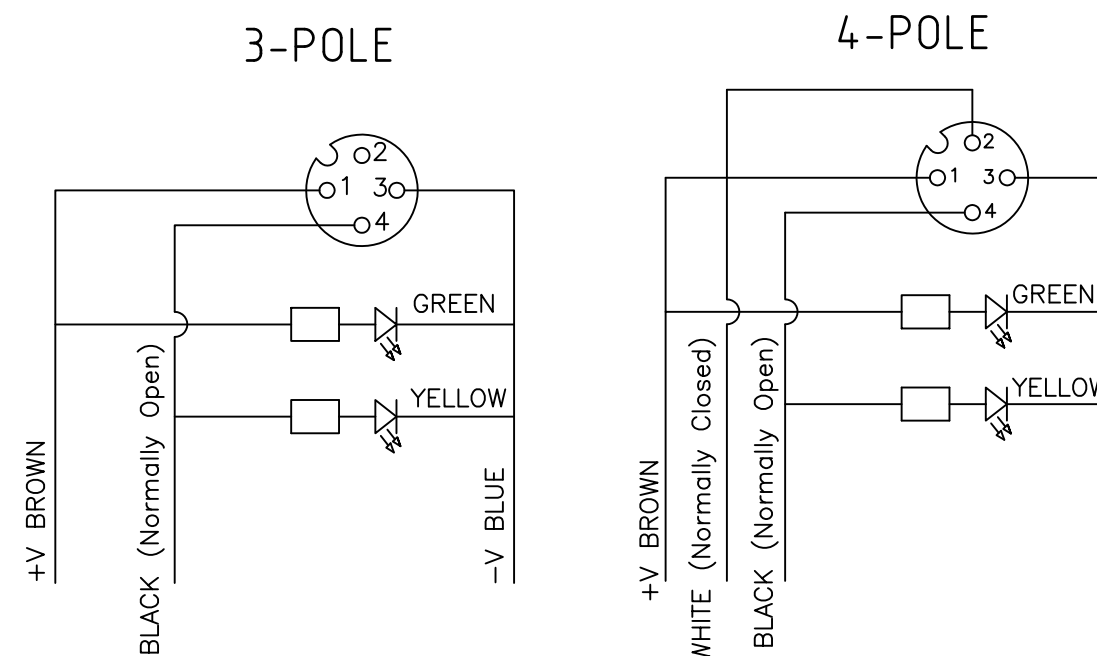

FEMALE FACE VIEW	FEMALE FACE VIEW
3-POLE	4-POLE
WIRING DIAGRAM	WIRING DIAGRAM
1 BROWN 2 NOT USED 3 BLUE 4 BLACK	1 BROWN 2 WHITE 3 BLUE 4 BLACK

DESCRIPTION EC NO.: WEU2010-0381 DRWN: LSTEMMLE CHKD: NS APPR: NSTAUDIG 24.02.10 2010/02/25		DESCRIPTION	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 2:1	DESIGN UNITS METRIC	FIRST ANGLE PROJECTION		
			▽ = 0 ▽C = 0		mm	INCH	DRAWN BY BBRAUCH	DATE 2010/02/03	MMC-3-4POL-FE/M-90/90 LED 22/3-4 BLK PUR CABLE ----			
				4 PLACES	±---	±---	CHECKED BY FP	DATE 2010/02/25				
				3 PLACES	±---	±---	APPROVED BY NSTAUDIG		DATE 2010/02/25		molex MOLEX INCORPORATED	
				2 PLACES	±---	±.01						
1 PLACE	±0.3	±---	ANGULAR ± --- °		MATERIAL NO. SEE TABLE		DOCUMENT NO. SD-120067-021		SHEET NO. 1 OF 1			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS												

2	REV	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
---	-----	--	--	--	--	--	--	--	--	--	--