
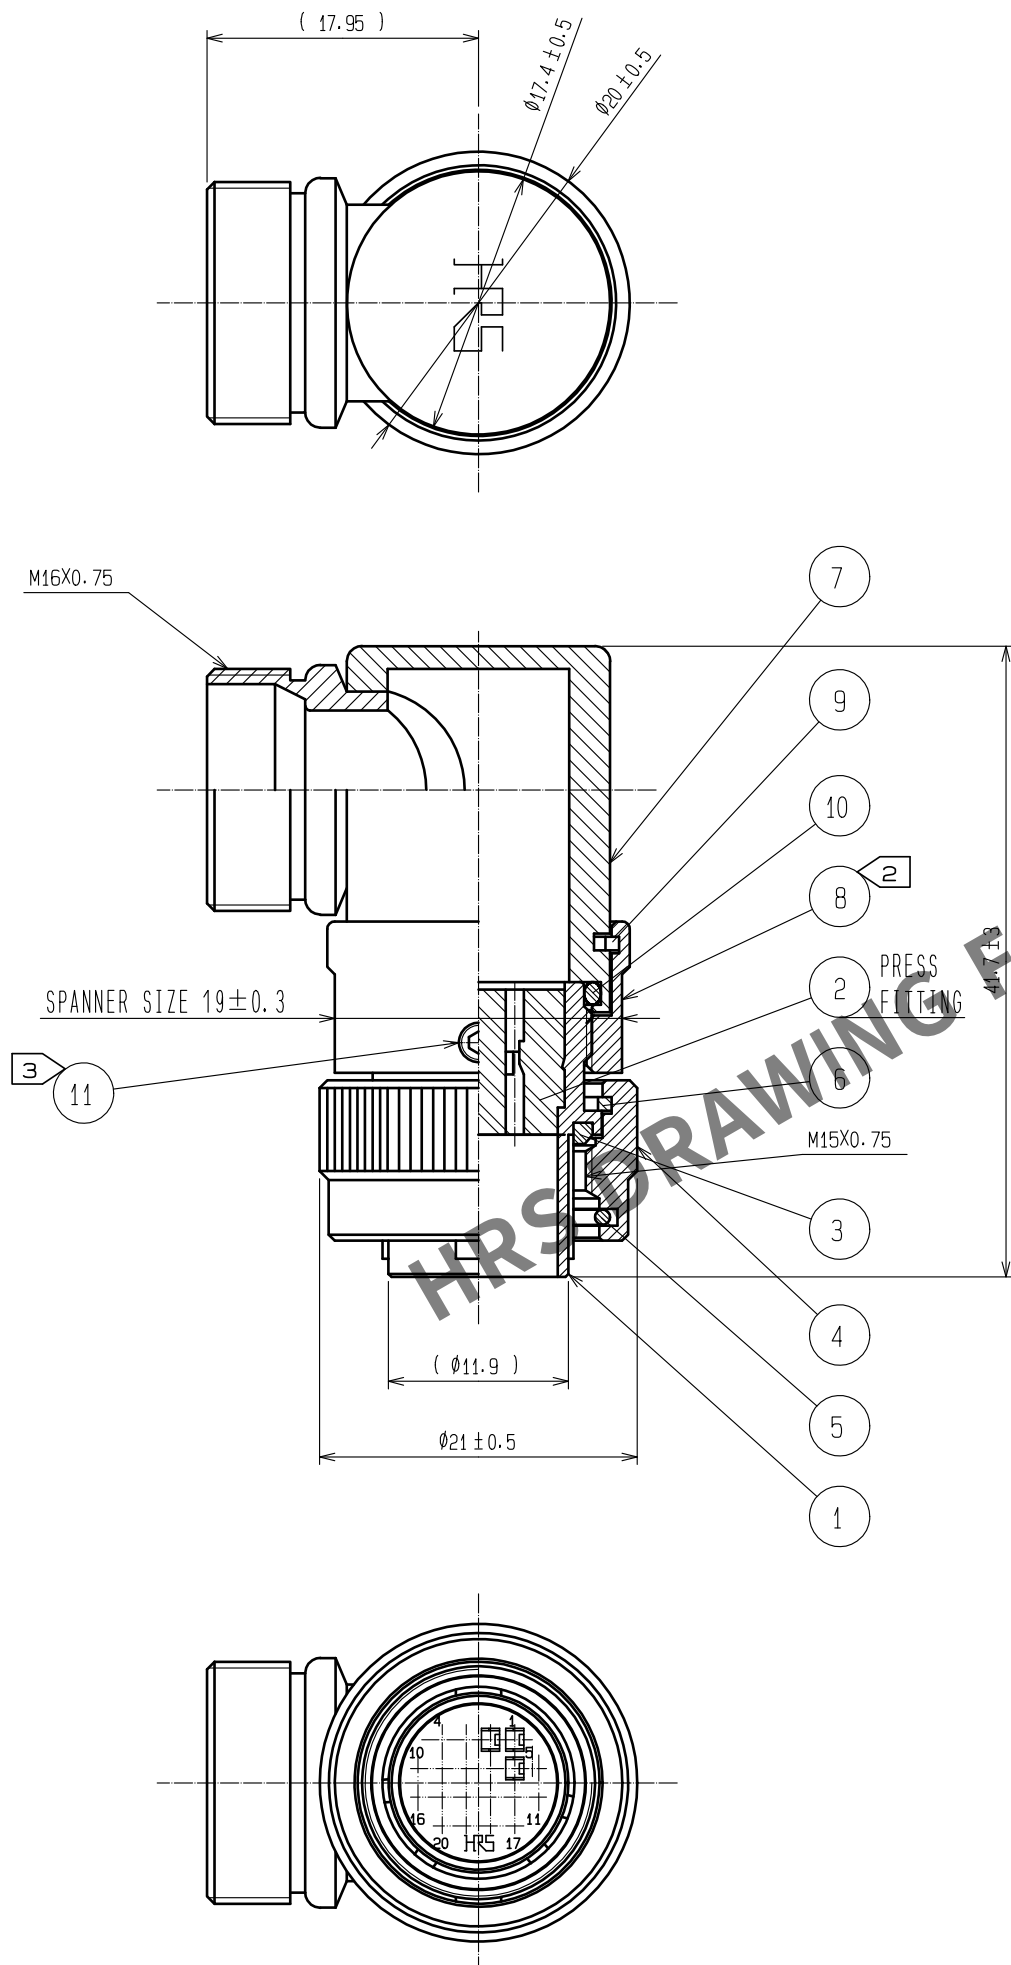




- NOTES
- ONE EXAMPLE OF THE ROTATION OF REF.NO.7,8 AND REF.NO.1 IS SHOWN.
 - THE RECOMMENDED CLAMP TORQUE REF.NO.8 : 3 TO 4 N · m.
LOCTITE 243, HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO PREVENT REF.NO.8 FROM LOOSENING.
 - THE RECOMMENDED CLAMP TORQUE REF.NO.11 : 0.2 TO 0.3 N · m.
LOCTITE 243, HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO PREVENT REF.NO.11 FROM LOOSENING.
 - THIS PRODUCT TO BE USED WITH CABLECLAMP, JR13WCC-*(72). THE RECOMMENDED CLAMP TORQUE : 3 TO 4 N · m. AND LOCTITE 243, HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO PREVENT FROM LOOSENING. * DESIGNATE DIAMETER OF APPLICABLE CABLE.
 - THE CABLE PULL AND TWISTING STRENGTH AND OTHER CHARACTERISTICS MAY DIFFER, DEPENDING ON THE CABLE STRUCTURE. PLEASE CONFIRM BEFORE THE USE.

6	PHOSPHOR BRONZE	NICKEL PLATING			
5	STEEL	NICKEL PLATING	11	STAINLESS STEEL	JISB1177 HEAGON SOCKET SET SCREW M2.6×0.45
4	BRASS	NICKEL PLATING	10	ACRYLONITRILE BUTADIENE RUBBER	(BLACK)
3	ACRYLONITRILE BUTADIENE RUBBER	(BLACK)	9	PHOSPHOR BRONZE	NICKEL PLATING
2	POLYBUTYLENE TEREPHTHALATE	(BLACK) UL94V-0	8	BRASS	NICKEL PLATING
1	ZINC ALLOY	NICKEL PLATING	7	BRASS	NICKEL PLATING
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS

UNITS mm		SCALE 2 : 1		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.						EDC-116688-31-00		
						HR22-12WTLP-20PC(31)		
						CL122-0064-9-31		