




RoHS

REVISIONS

REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.9.24	阿树

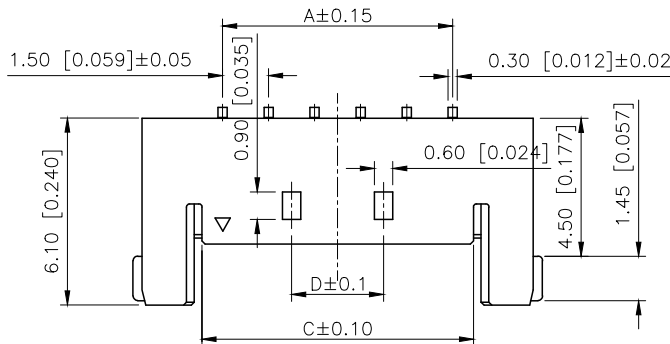

02P~04P Single Hole
Scale 1:0.7









■SPECIFICATIONS

- Voltage rating:150V AC/DC
- Current rating:3A AC/DC
- Withstanding Voltage:500V AC/minute
- Temperature range:-40°C~+125°C
- Insulation resistance:≥1000MΩ
- Contact resistance:≤20mΩ
- After environmental testing:≤40mΩ
- Color:Black

PART NO.:

X1503 W R S-XX-4T V01
① ② ③ ④ ⑤ ⑥ ⑦

- ①Series No
②Category:W-Wafer
③Welding Board Angle:R-Stright 90°
④Welding Way: S-SMT
⑤Row No.Pin No:XX-02~12Pin
⑥Material:4T-PA4T UL94V-0
⑦Planting: V01-Gold Flash

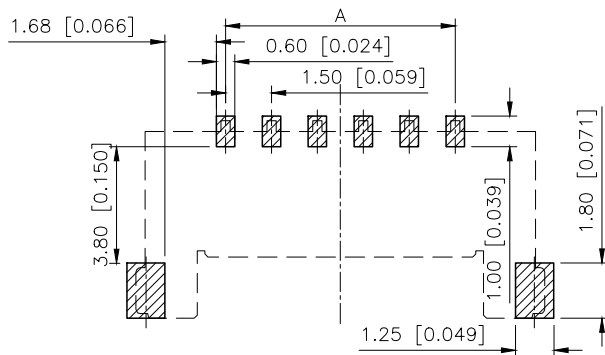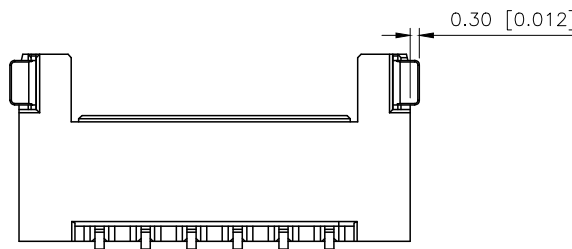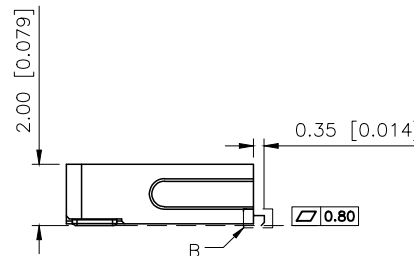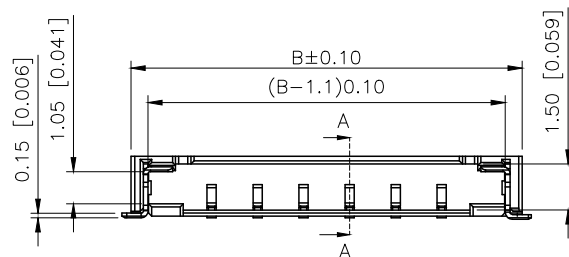

PCB LAYOUT

Poles	Dimensions(mm)			
	A	B	C	D
02	1.50	6.75	2.85	/
03	3.00	8.25	4.35	/
04	4.50	9.75	5.85	/
05	6.00	11.25	7.35	3.00
06	7.50	12.75	8.85	3.00
07	9.00	14.25	10.35	4.50
08	10.50	15.75	11.85	6.00
09	12.00	17.25	13.35	7.50
10	13.50	18.75	14.85	9.00
11	15.00	20.25	16.35	10.50
12	16.50	21.75	17.85	12.00

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN
CHECKED
APPROVED

阿树

VIEW:
UNIT: mm/in
SIZE: A4

MODEL TYPE:
1.50mm Crimp Style Connector
PART NO.:
X1503WRS-XX-4TV01
DWG NO.:

X1503WRS-XX-4TV01	PA4T UL94V-0	Brass	Gold-Flash	Brass	Tin	X1503H
PART NO	Material	Material(Pin)	Finish(Pin)	Material (Solder Tabs)	Finish (Solder Tabs)	Suitable XKB Housing

XKB INDUSTRIAL PRECISION CO.,LIMITED

SCALE	PAGE	REVISION
N/A	1/1	A1