

SACC-CIP-M12FS-4P SMD-SP - Sample set



1418548

<https://www.phoenixcontact.com/us/products/1418548>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Sample set, 4-position, Socket, straight, M12, coding: A, PCB mounting, SMD, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1239194

Commercial data

Item number	1418548
Packing unit	5 pc
Minimum order quantity	5 pc
Product key	ABQXAA
GTIN	4055626161020
Weight per piece (including packing)	6.99 g
Weight per piece (excluding packing)	6.99 g
Country of origin	DE

Technical data

Notes

Notes on operation	The electrical and mechanical data specified assume that the connector pair is correctly locked and mounted. If the connector is unlocked and if there is a danger of contamination, the connector must be sealed using a protective cap > IP54. Influences arising from litz wires, cables or PCB assembly must also be taken into consideration.
--------------------	--

Product properties

Product type	Contact insert
Number of positions	4
Seal present	yes
Coding	A
Thread type	M12

Insulation characteristics

Overvoltage category	II
Degree of pollution	3

Electrical properties

Rated surge voltage	2.5 kV
Contact resistance	≤ 3 mΩ
Insulation resistance	≥ 100 MΩ
Nominal voltage U_N	250 V
Nominal current I_N	4 A

Connection data

Connection method	SMD
-------------------	-----

Material specifications

Flammability rating according to UL 94	V0
Seal material	FKM
Contact material	CuZn
Contact surface material	Au
Contact carrier material	PA

Connector

Connection 1

Head design	Socket
Head cable outlet	straight
Head thread type	M12
Coding	A

SACC-CIP-M12FS-4P SMD-SP - Sample set



1418548

<https://www.phoenixcontact.com/us/products/1418548>

Mechanical properties

Mechanical data

Insertion/withdrawal cycles	> 100
-----------------------------	-------

Environmental and real-life conditions

Ambient conditions

Degree of protection (when plugged in)	IP67 (correctly plugged in and locked)
Degree of protection (not plugged in)	IP65 (not plugged in, by means of additional O-ring seal with device)
Degree of protection	IP67
Ambient temperature (operation)	-25 °C ... 105 °C (Plug / socket)
	-40 °C ... 105 °C (without mechanical actuation)

Standards and regulations

M12

Standard designation	M12 connector
Standards/specifications	IEC 61076-2-101
Note	In line with

Mounting

Mounting type	PCB mounting
---------------	--------------

SACC-CIP-M12FS-4P SMD-SP - Sample set


1418548

<https://www.phoenixcontact.com/us/products/1418548>



Drawings

Schematic diagram

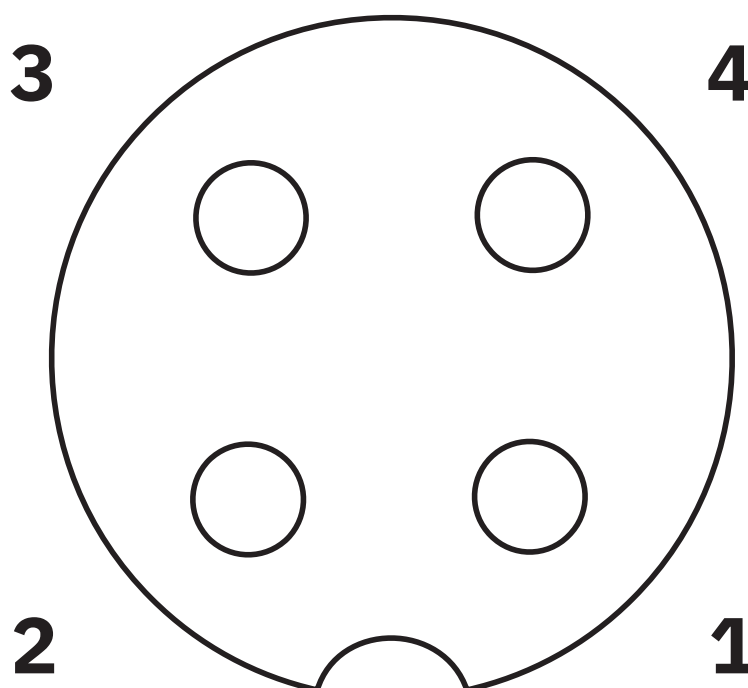

Pin assignment M12 socket, 4-pos., A-coded, view female side

SACC-CIP-M12FS-4P SMD-SP - Sample set




1418548

<https://www.phoenixcontact.com/us/products/1418548>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1418548>

 cULus Recognized Approval ID: E221474-20160506				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	250 V	4 A	-	-

SACC-CIP-M12FS-4P SMD-SP - Sample set



1418548

<https://www.phoenixcontact.com/us/products/1418548>

Classifications

ECLASS

ECLASS-11.0	27440223
ECLASS-12.0	27440223
ECLASS-13.0	27440223

ETIM

ETIM 9.0	EC003557
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

1418548

<https://www.phoenixcontact.com/us/products/1418548>

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)

China RoHS

Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	dd5e3b89-981c-4b4d-801b-9669a14b84e9

SACC-CIP-M12FS-4P SMD-SP - Sample set



1418548

<https://www.phoenixcontact.com/us/products/1418548>

Accessories

SACC-BP-F-M12/M15-6-SMD - Housing screw connection

1414021

<https://www.phoenixcontact.com/us/products/1414021>



Housing screw connection, Socket, M12, Rear mounting, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1239058

SACC-BP-F-M12/M15-6-SMD SCO - Housing screw connection

1414023

<https://www.phoenixcontact.com/us/products/1414023>



Housing screw connection, Socket, M12-SPEEDCON, Rear mounting, M15 x 1, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1239059

SACC-CIP-M12FS-4P SMD-SP - Sample set

1418548

<https://www.phoenixcontact.com/us/products/1418548>

SACC-FP-F-M12/M14 SMD - Housing screw connection

1412079

<https://www.phoenixcontact.com/us/products/1412079>



M12 female connector, front mounting SMD with M14 screw fastening

SACC-FP-F-M12/PRESS SMD - Housing screw connection

1412081

<https://www.phoenixcontact.com/us/products/1412081>



Housing screw connection, Socket, M12, Front mounting, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1238973

SACC-CIP-M12FS-4P SMD-SP - Sample set

1418548

<https://www.phoenixcontact.com/us/products/1418548>



SACC-BP-F-M12/SMD-0,9/1,6-9TIP - Housing screw connection

1419569

<https://www.phoenixcontact.com/us/products/1419569>



Housing screw connection, Socket, M12, Rear mounting, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1239268

SACC-BP-F-M12/SMD-1,6/2,3-9TIP - Housing screw connection

1419570

<https://www.phoenixcontact.com/us/products/1419570>



Housing screw connection, Socket, M12, Rear mounting

SACC-CIP-M12FS-4P SMD-SP - Sample set

1418548

<https://www.phoenixcontact.com/us/products/1418548>



SACC-BP-F-M12/SMD-2,3/3,0-9TIP - Housing screw connection

1419571

<https://www.phoenixcontact.com/us/products/1419571>



Housing screw connection, Socket, M12, Rear mounting, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1239270

SACC-BP-F-FIX/NUT-BK-SMD - Fixing sleeve

1419568

<https://www.phoenixcontact.com/us/products/1419568>



Fixing sleeve for M12 housing screw connection with tolerance-compensating function, for SMD-solderable M12 socket contact inserts.

SACC-CIP-M12FS-4P SMD-SP - Sample set

1418548

<https://www.phoenixcontact.com/us/products/1418548>



SACC-BP-F-FIX/NUT-CY-SMD - Fixing sleeve

1419565

<https://www.phoenixcontact.com/us/products/1419565>



Fixing sleeve for M12 housing screw connection with tolerance-compensating function, for SMD-solderable M12 socket contact inserts.

SACC-BP-F-FIX/NUT-GN-SMD - Fixing sleeve

1419566

<https://www.phoenixcontact.com/us/products/1419566>



Fixing sleeve for M12 housing screw connection with tolerance-compensating function, for SMD-solderable M12 socket contact inserts.

SACC-CIP-M12FS-4P SMD-SP - Sample set

1418548

<https://www.phoenixcontact.com/us/products/1418548>



SACC-BP-F-FIX/NUT-VT-SMD - Fixing sleeve

1419567

<https://www.phoenixcontact.com/us/products/1419567>



Fixing sleeve for M12 housing screw connection with tolerance-compensating function, for SMD-solderable M12 socket contact inserts.

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com