
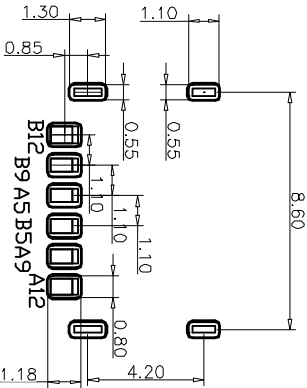
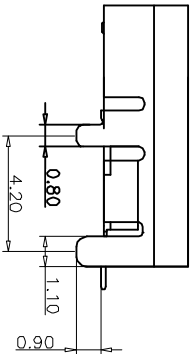




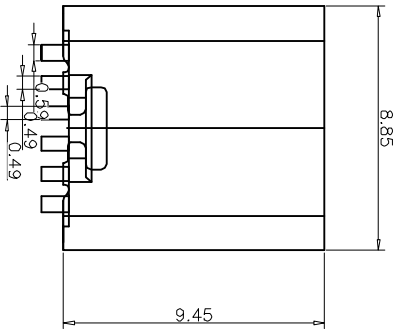

RECOMMEND P.C.B LAYOUT(COMPONENT SIDE)
TOLERANCE FOR PCB LAYOUT IS ±0.05

- 备注 (NOTE):
- 1材质:
- 1.1胶芯: LCP UL94 V-0
 - 1.2端子: C2680, T=0.2mm; 镍底, 镀金
 - 1.3外壳: 不锈钢201-H 表面镀镍
- 2.电气特性:
- 2.1.接触区: 接触电阻40mΩ Max, 允许10mΩ变化量. 测试条件: 20mv, 100mA下测量.
 - 2.2.接触电流: 3A VBUS引脚; 1.25A用于GND引脚; 其他引脚为0.25A.
 - 2.3.额定电压: 5V.
 - 2.4.耐电电压: 100VAC.
 - 2.5.绝缘电阻: 至少100兆欧.
- 3.机械性能:
- 3.1.插入力: 0.5-2.0Kg
 - 3.2.拔出力: 0.6-2.04Kg
 - 3.3.插拔次数: 5000次.
 - 4.工作环境: -20℃ to +85℃.

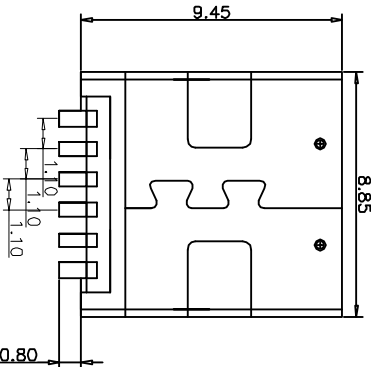


TABLE:

NO	PART	QTY	Material
1	SHELL	1	ZINC ALLOY,NI30u"Min PLATED
2	CONTACT	6	C2680,TIN80u"/Au1u"/NI30u" PLATED
3	IMD HOUSING	1	LCP UL94 V-0 BLACK
4	CAP	1	LCP UL94 V-0 BLACK
5	WATERPROOF RING	1	SILICONE UL94 V-0 BLACK

		深圳市万骏达电子有限公司	
		http://www.wanjunda.com	
品名 (ITEM NO)	TYPE-C 6P板上:无弹9.45	图号 (DWG NO)	
料号 (PART NO)	TPC-6P-WT-9.5	版本 (REV)	
型号 (MODEL NO)		日期 (DATE)	
		设计 (DESIGN)	
		审核 (CHECKED)	
		核准 (APPROVED)	
		单位 (UNIT): MM	
		比例 (SCALE) 1:1	
		未注公差	
		TOLERANCE UNSPECIFIED	
		X.X ±0.30	
		X.XX ±0.20	
		X.XXX ±0.10	
		X.X ±0.05	
		X.X ±0.02	