


FCI PART NO.	LENGTH
10127824-P0008YYLF	74±3

REV	ECN NO	DESCRIPTION
B	ELX-N-20938-1	CHANGE THE DIMENSION FROM 2.5MAX TO 4MAX





WIRING LIST	
CN1	CN2
1	1
2	2
3	3
4	4
5	5
6	6

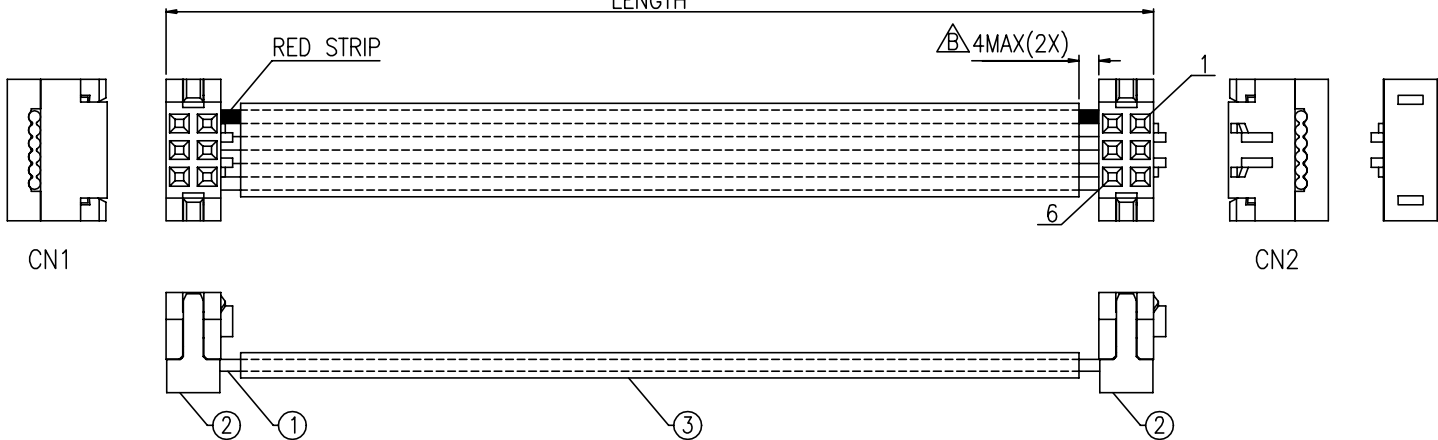

NOTES:

1. MATERIAL: SEE BOM ON SHEET 1.
2. THIS DIMENSION IS A FINISHED PRODUCT LENGTH.
3. ALL CABLE ASSEMBLIES SHALL BE TESTED 100% FOR CONTINUITY AS DEFINED IN WIRING LIST.
4. UNLESS OTHERWISE SPECIFIED ALL CABLE ASSEMBLIES SHALL BE TESTED:  
HI-POT: DC 300V/10ms  
DIELECTRIC RESISTANCE: 10M Ohms MIN.  
CONNECTION RESISTANCE: 2 Ohms MAX.
5. LEAD FREE PRODUCTS MEET EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.

A/R	M	HEAT SHRINK TUBE: OD=5mm, COLOR:BLACK	3
2	EA	IDC CONN: 2.0PITCH 2*3PIN, 0.76um Gold PLATING, WITH CENTRAL KEY AND FRICTION LATCH BUMP, FCI P/N:89947-706LF	2
A/R	M	FLAT CABLE: 1.0PITCH 28AWG*6C, UL2651, COLOR:GRAY	1
Q'TY	UNIT	DESCRIPTION	ITEM

spec ref		See Notes		dr	Carl Wang	2015-05-21	projection		MM		size	A3	scale	N/A				
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED		eng	Carl Wang	2015-05-21	product family				ecn no							
surface 		linear				title		MINITEK IDC CABLE ASSEMBLY		dwg no		10127824		rev		B		
																		chr
				appr		Guo-Feng Jin		2015-05-21										