
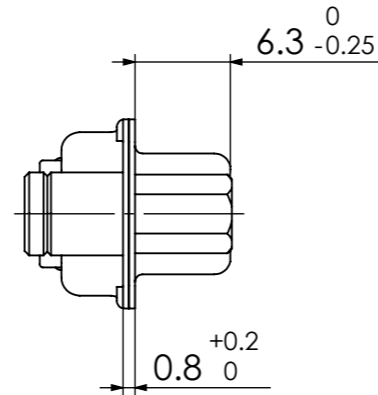
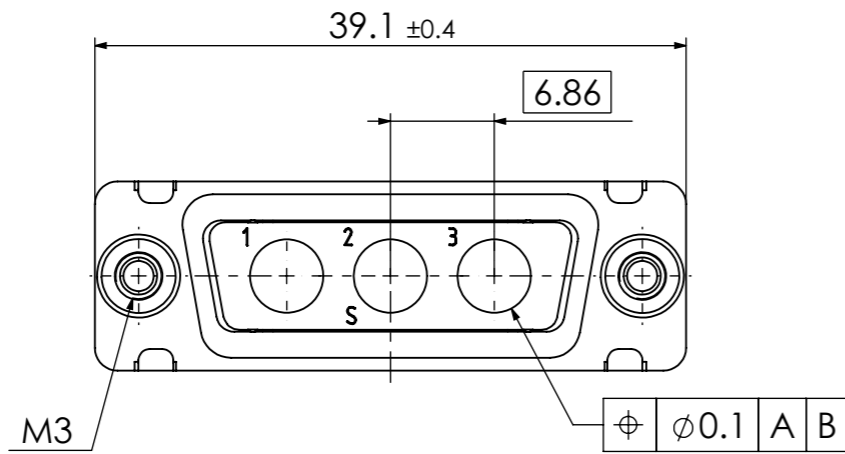
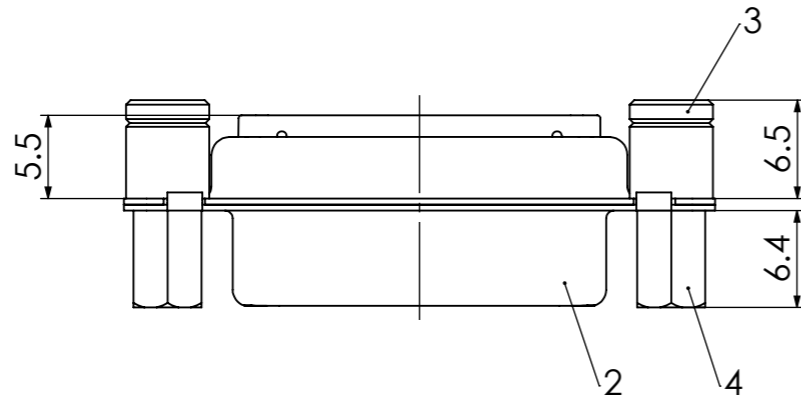



COMMENT:
ALL RIGHTS ARE RESERVED BY US FOR THIS DRAWING. WITHOUT OUR PRIOR CONSENT,
IT MAY NEITHER BE DUBICATED NOR MADE AVAILABLE TO A THIRD PARTY.
AND IT ALSO MAY NOT BE IMPROPERLY USED BY TE RECEIVER, OR A THIRD PARTY.

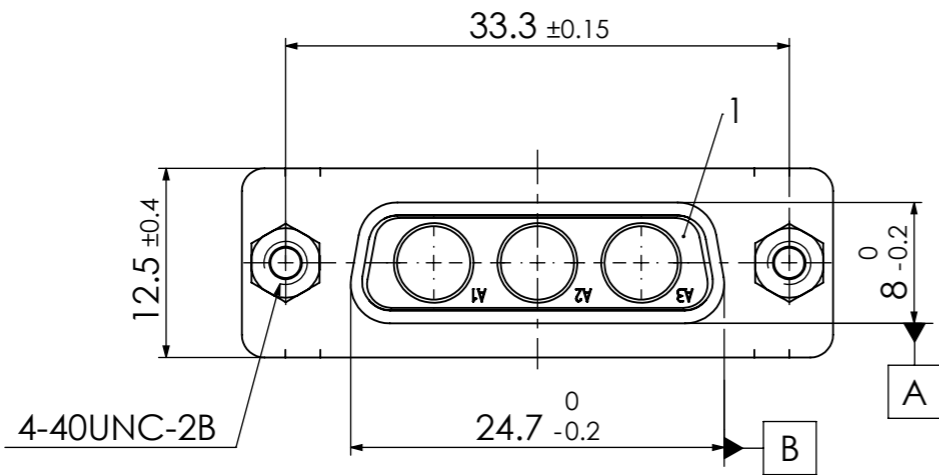

4	2	Threaded spacer	4-40 / Steel	tin plated
3	2	Threaded spacer	M3 / Steel	tin plated
2	1	Shell	Steel	tin plated
1	1	Insulator	PBT (-55°C to +130°C) acc. UL94V-0	green
No.	St.	Part	Type Description/Material	Surface plating/Colour/Class

FUNCTIONAL SYMBOLS <div>▽ = 0</div> <div>▽ = 0</div> <div>▽ = 0</div>	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
	DIMENSION UNITS mm		SCALE 2:1		MEASUREMENTS WITHOUT TOLERANCE ACC. TO ISO 2768-m			molex		
					CURRENT REVISION			FCT D-Sub Mixed-Layout Connector		
					DRWN: DRAWN BY msteinbrueck 04-10-2023					
				APPR: APPR BY mteubel 29-11-2023						
2		24410		INITIAL REVISION			PRODUCT CUSTOMER DRAWING			
1				DRWN: DRAWN BY ADenzinger 06-09-2006			MATERIAL NUMBER			
REV.		CH.-NO.		APPR: APPR BY skusber 08-09-2006			1731071036			
REPLACEMENT FOR: 1731071036_Rev. A1			FRIST ANGLE PROJECTION 		DRAWING A3-SIZE		DOCUMENT NUMBER FM3W3S-1485		CUSTOMER GENERAL MARKET	