



E-NETTR T1/CEPT/ISDN-PRI Transformer


P/N: H0801G

- * Lead-Free & Designed to meet RoHS requirement
- * Designed to meet IR 255°C peak Requirement.
- * Operating temperature range: -40°C to +85°C
- * Storage temperature range: -40°C to +85°C

Electrical Specifications@25 ° C


Part Number	Turn Ratio (±3%)	OCL(uH Min) @ 100KHz/0.1V	L.L (uH Max)	IL (dB Max)	IL (dB Min)	DCR (Ω Max)		Hi-Pot (Vrms MIN)
	1-2:3-4:5-8	1-2, 3-4, 5-8	5-8 (short1/2/3/4)	500KHz-20MHz		1-4 (short2-3)	5-8	
H0801G	1:1:1	250	1.0	1.0	14	0.4	0.2	AC1500 / 0.5mA/60s

Mechanica

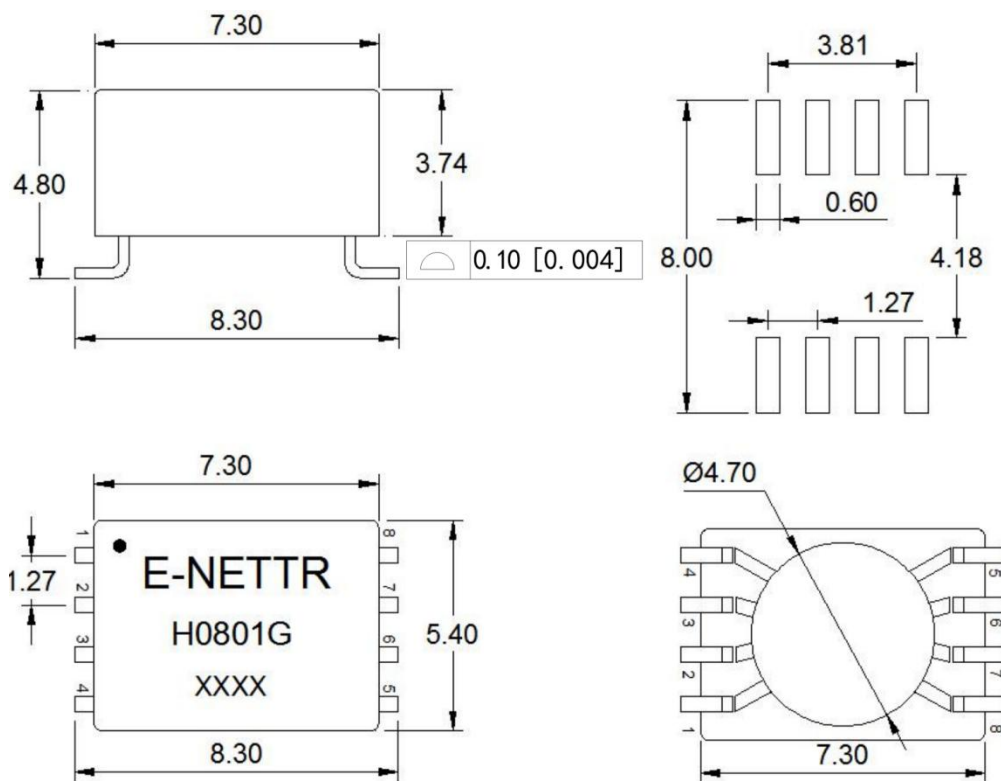

Unless otherwise specified tolerances: xx.xo ± 0.25mm
o.xx ± 0.05mm

Schematic

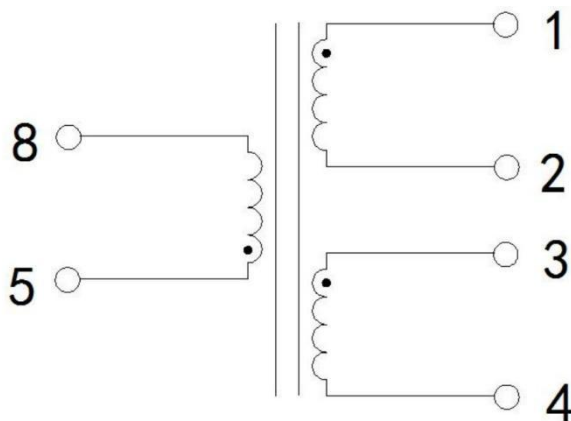

东莞市祥星电子有限公司

地址：东莞市石碣镇横滘科技中路第三工业区

Miss Xie: 13549396638

TEL:0769-86384669

FAX:0769-81813600

Http://www.e-nettr.com

xingguang@e-nettr.com