
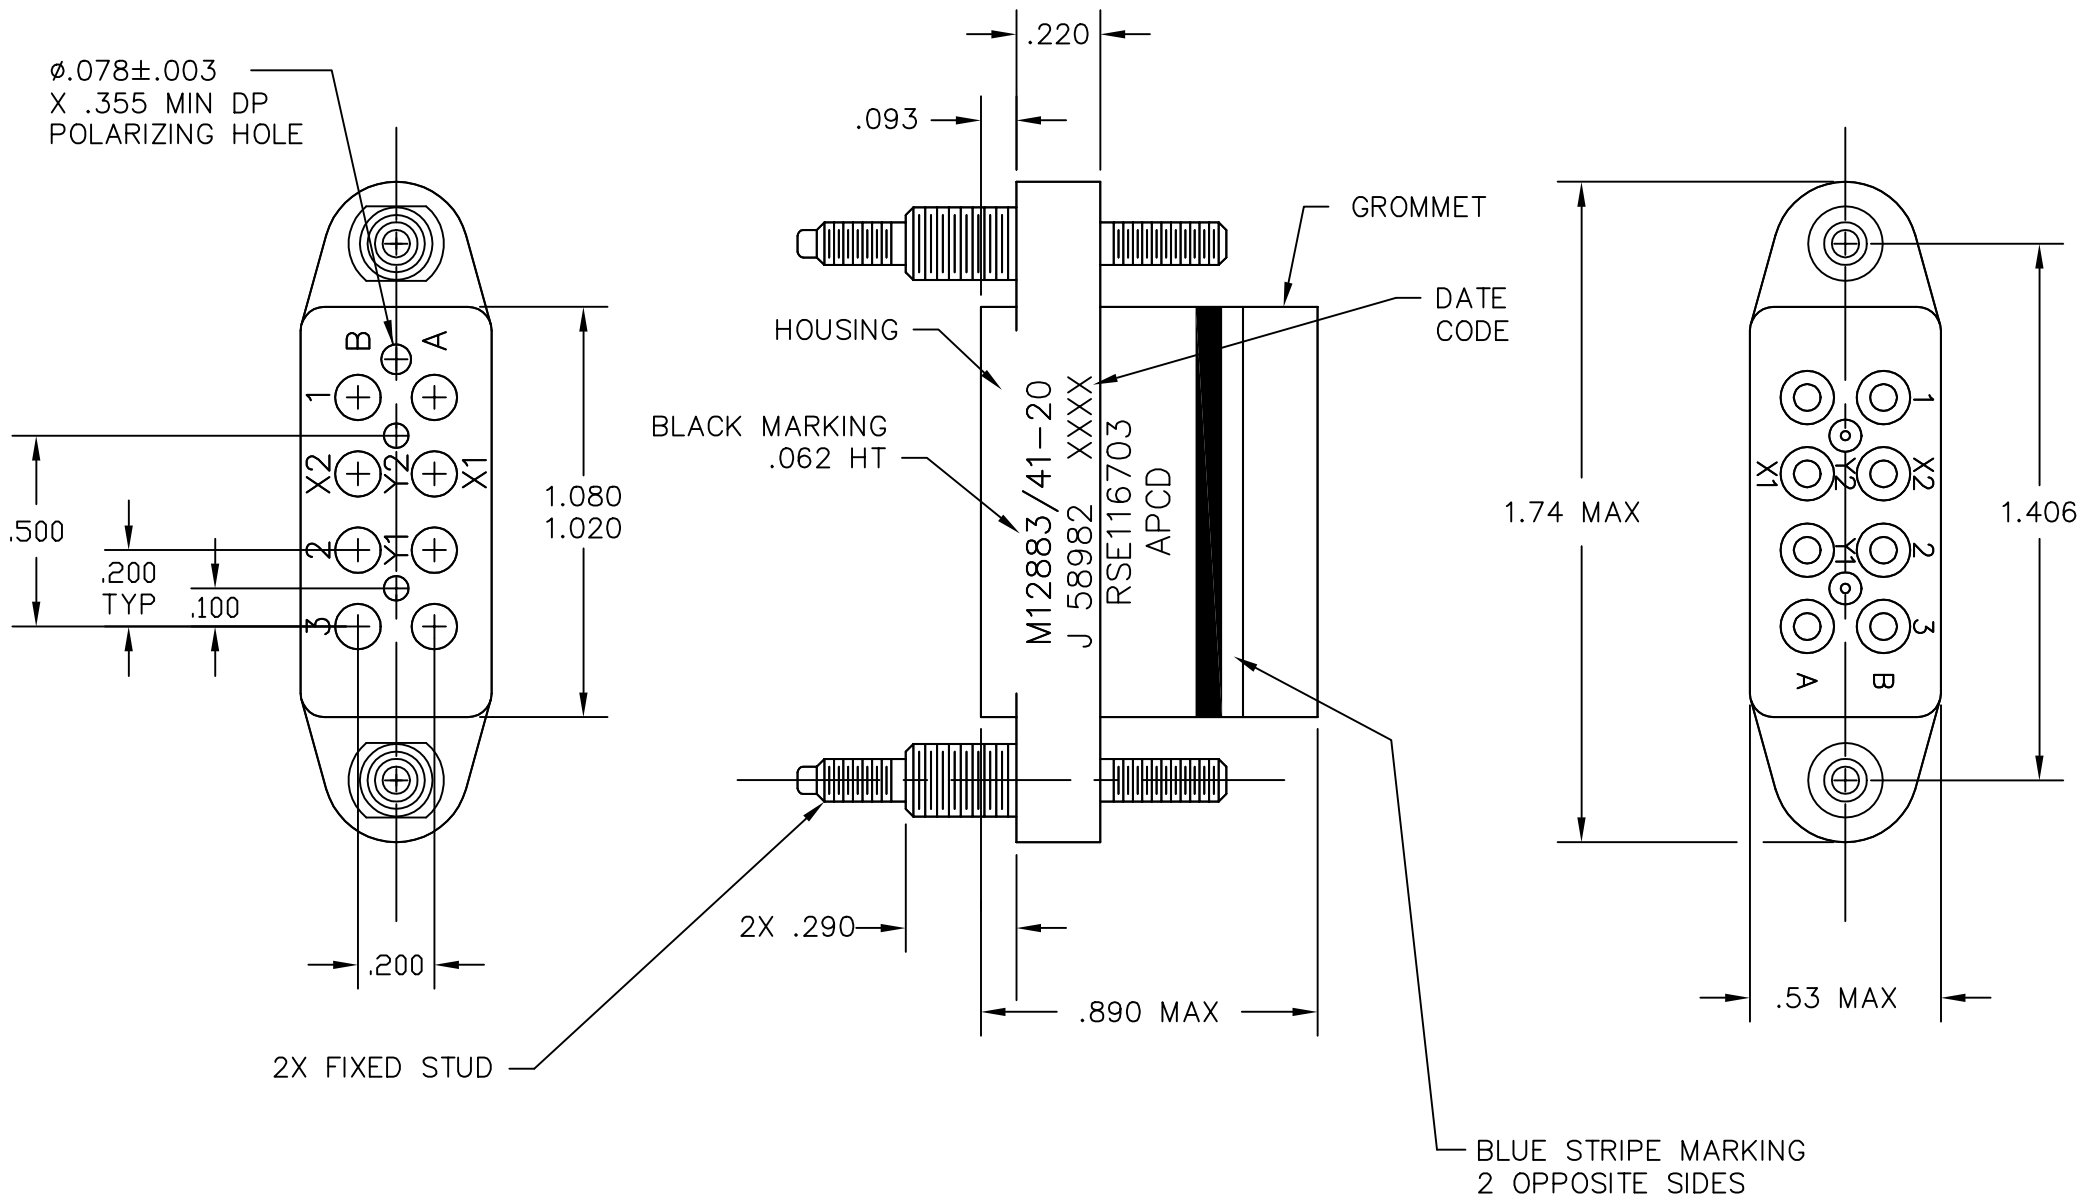


REV	ECN	APP'D
-	5465	JT 5/27/04
H	5519	SK 9/21/04



- NOTES:
- PART MEETS REQUIREMENTS PER MIL-PRF-12883.
 - MATERIALS:
 - SOCKET BODY: POLYETHERIMIDE PER MIL-P-46184
 - GROMMET: SILICONE RUBBER PER ZZ-R-765
 - HARDWARE: CRES STEEL AND STEEL CADMIUM CHROMATE FINISH
 - CONTACT RETAINERS: BERYLLIUM COPPER
 - SOCKET CONTACTS: COPPER ALLOY, HARD GOLD PLATED PER MIL-G-45204
 - OPERATING RANGE
 - TEMPERATURE: -65°C TO 125°C
 - INSULATION RESISTANCE: 1000 MEGOHMS MIN.
 - DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS AT SEA LEVEL, 500 VRMS AT 80,000 FT. ALTITUDE
 - VIBRATION: MIL-STD-202, METHOD 204, TEST CONDITION G
 - SHOCK: MIL-STD-202, METHOD 213, TEST CONDITION C
 - PART SUPPLIED WITH MOUNTING HARDWARE
 - PART SUPPLIED WITH CONTACTS PER TABLE BELOW

PART NO.		CONTACTS SUPPLIED		MARKING	
RSE116702		NONE		RSE116703	
RSE116703		(8) SIZE 16/16, (2) SZ 22/22			
TITLE		RELAY SOCKET M12883/41-20 (8) SIZE 16, (2) SIZE 22			
SIZE	DWG NO.			REV	
B	RSE116702			H	
CODE: 58982		SCALE: 2X		SHEET 1 OF 1	

DIMENSIONS ANSI Y14.5M UNITS: INCHES ACAD FILE	TOLERANCES .XX ±.01 .XXX ±.010 ANGLES ±2°	PROJECTION 	Amphenol Pcd <i>SPECIFICATION DRAWING</i>	
			ENGR S. KONDO 5/27/04	
ORIGINAL	THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF AMPHENOL PCD INC. PEABODY, MA		CHKD R. NEWMAN 5/27/04	
			APPD J. TON 5/27/04	