

# Electronic housing - ECS-B-122X169-S-UV1-V - 2230002

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://phoenixcontact.com/download)



Screw locking vented enclosure of the ECS Family. IP66/67/69 rated when mated with associated faceplate. Color: Black (9005), Width: 164 mm, Height: 176 mm, Depth: 64 mm

#### Your advantages

- ☑ Part of the EnviroCase System
- Suitable for outdoor/indoor applications
- ☑ IP66/IP67 rated with faceplate secured to the base
- Wall, panel, or pole mounting options
- ☑ Breather vent



## **Key Commercial Data**

Packing unit	5 pc
Minimum order quantity	5 pc
GTIN	4 055626 381350
GTIN	4055626381350

#### Technical data

### Item properties

Туре	ECS-B-122X169-S-UV1-V
Order No.	2230002
Туре	Screw locking
Mounting type	Wall or panel mount. Pole mount with accessory.
Ventilation	integrated pressure compensation membrane

#### Measurements

Width [w]	164 mm
Height [ h ]	176 mm
Depth [ d ]	64 mm

#### Material specifications



# Electronic housing - ECS-B-122X169-S-UV1-V - 2230002

## Technical data

## Material specifications

•	
Color (RAL)	black (9005)
Flammability rating according to UL 94	V0
Housing material	PC (polycarbonate)
Ambient conditions	
Ambient temperature (operation)	-40 °C 100 °C
PCB data	
PCB thickness	1.59 mm 2.36 mm
Packaging information	
Pieces per package	5
Denomination packing units	Pcs.
Standards and regulations	
Flammability rating according to UL 94	V0
Environmental Product Compliance	
REACh SVHC	Lead 7439-92-1
China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values


# Drawings

Approval details



# Electronic housing - ECS-B-122X169-S-UV1-V - 2230002

Dimensional drawing

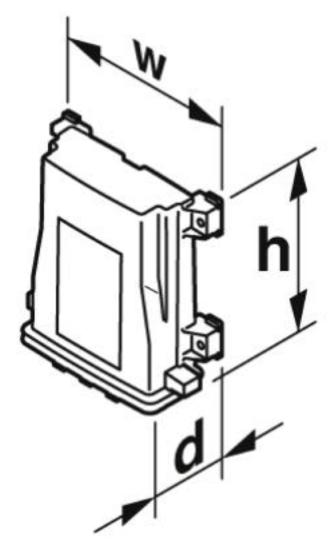

# Approvals Approvals Approvals EAC Ex Approvals



# Electronic housing - ECS-B-122X169-S-UV1-V - 2230002

## **Approvals**



Phoenix Contact 2019 © - all rights reserved http://www.phoenixcontact.com

PHOENIX CONTACT GmbH & Co. KG Flachsmarktstr. 8 32825 Blomberg Germany Tel. +49 5235 300

Fax +49 5235 3 41200 http://www.phoenixcontact.com