
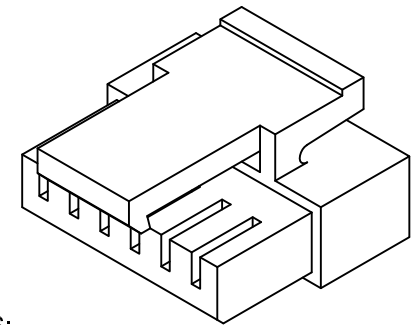
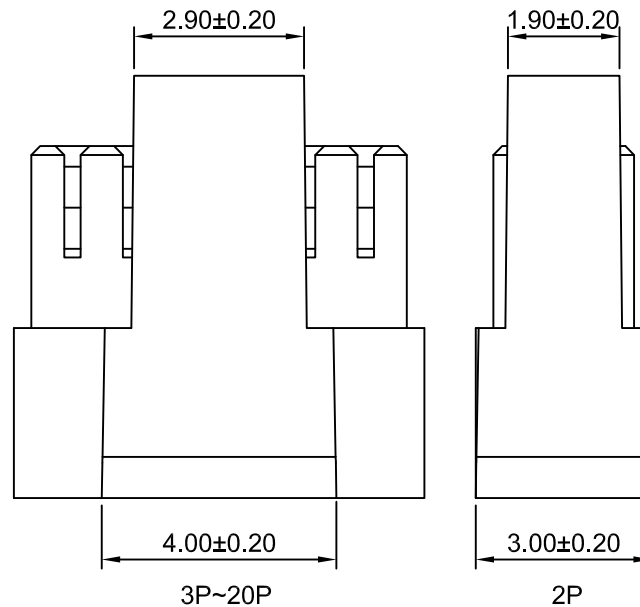



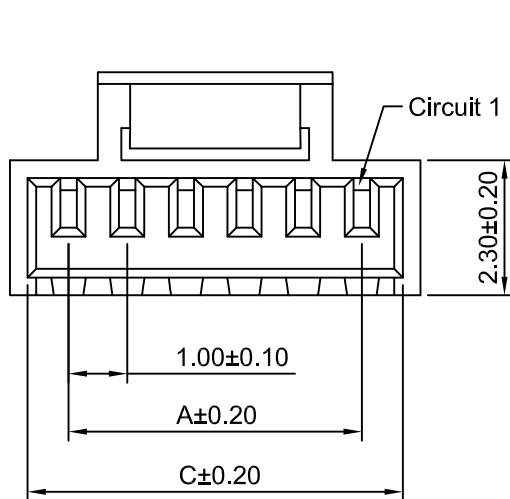


SPECIFICATIONS:

Current Rating: 2A AC,DC (AWG #28)
 Voltage Rating: 50V AC,DC
 Temperature Range: -40°C ~ +105°C
 Contact Resistance: 20mΩ Max.
 Insulation Resistance: 100MΩ Min.
 Withstanding Voltage: 500V AC/minute
 Material: Nylon 66, UL94V-0(White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2P	1.00	3.00	2.40	12P	11.00	13.00	12.40
3P	2.00	4.00	3.40	13P	12.00	14.00	13.40
4P	3.00	5.00	4.40	14P	13.00	15.00	14.40
5P	4.00	6.00	5.40	15P	14.00	16.00	15.40
6P	5.00	7.00	6.40	16P	15.00	17.00	16.40
7P	6.00	8.00	7.40	17P	16.00	18.00	17.40
8P	7.00	9.00	8.40	18P	17.00	19.00	18.40
9P	8.00	10.00	9.40	19P	18.00	20.00	19.40
10P	9.00	11.00	10.40	20P	19.00	21.00	20.40
11P	10.00	12.00	11.40				

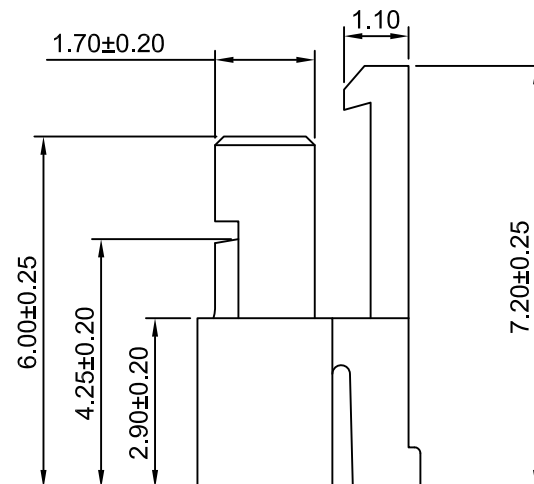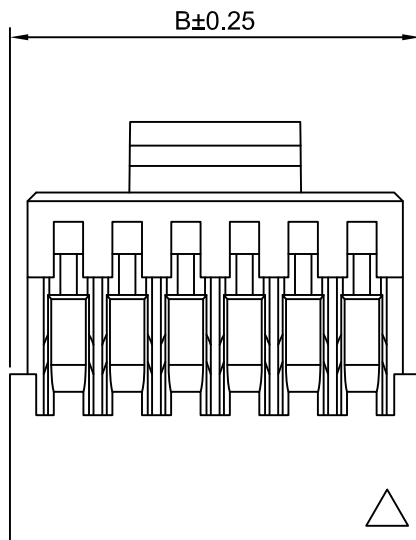

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	8:1	1 of 1
DRAWN	CHK'D	APPR
Wenmin Luo	Dlankul Wan	Jack Yin

TITLE	
1.00mm PITCH HOUSING WITH PROTUSIONS	
DRAWING NO.	REV
A1002HB-XP	A2

A2	CHANGE THE DRAWING	2021.12.09
A1	CHANGE THE DRAWING	2021.06.19
A0	NEW RELEASE	2011.03.23
REV	DESCRIPTION	DATE

General Tolerances	THIRD ANGLE PROJECTION
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°	