
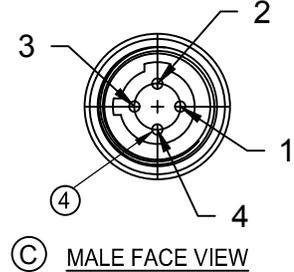
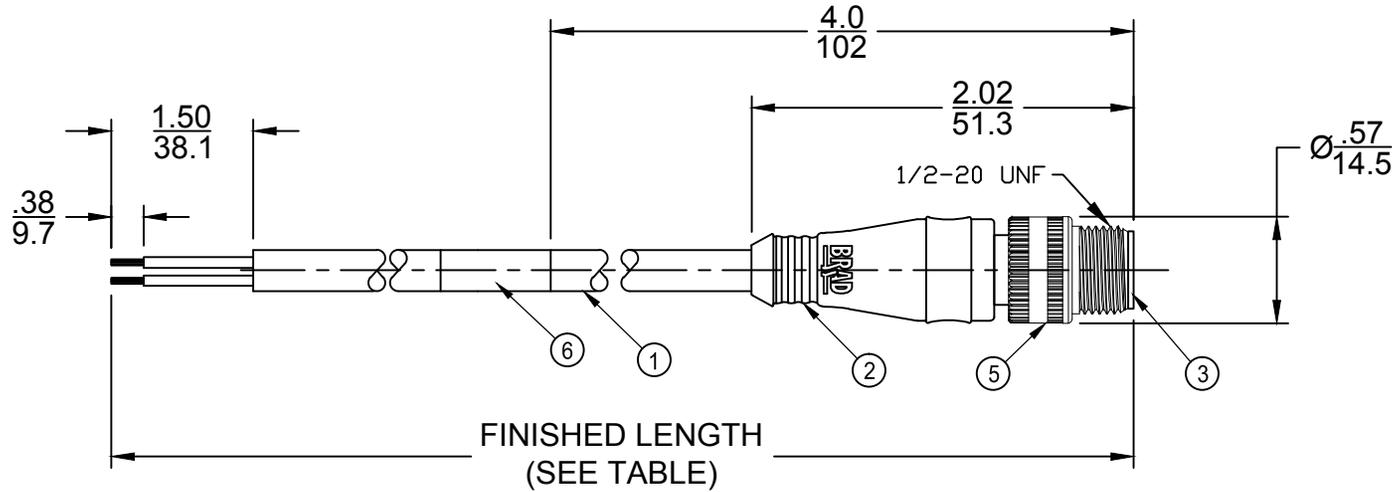


704006D02FXXX

POLES	LENGTH
2	F010 - 1 FT
3	F050 - 5 FT
4	F100 - 10 FT

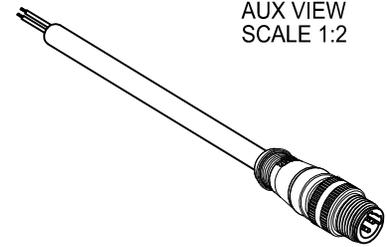

1	RED-BLACK
2	RED-WHITE
3	RED
4	GREEN-GND

WIRING DIAGRAM

NOTES:

- MATERIALS: SEE TABLE
- FINISHES: SEE TABLE
- ELECTRICAL DATA:
MAX. VOLTAGE: 250 VAC/VDC
MAX. CURRENT: 4 AMPS
- ENVIRONMENTAL:
PROTECTION IP67 (WHEN MATED)
TEMPERATURE RANGE: -20°C TO 105°C
- WRAP LABEL IS MARKED WITH P/N, DATE CODE, VOLTAGE & AMPERAGE
- ASSEMBLY IS RoHS COMPLIANT
- DIMS. ARE FOR REFERENCE UNLESS NOTED OTHERWISE

ITEM	DESCRIPTION	MATERIAL	FINISH
6	LABEL	NYLON	BLACK/YELLOW
5	COUPLER	ZINC DIE CAST	BLACK E-COAT
4	PIN CONTACT	COPPER ALLOY	GOLD/NICKEL
3	INSERT	NYLON	BLACK
2	OVERMOLD	PVC	YELLOW
1	#22/4 CABLE W/BRAID SHIELD	PVC JACKET	YELLOW

CORRECTED PINOUT & NOTES EC NO: IPG2019-0062 DRWN: RSTONE 8/8/18 CHKD: C HRAST 2018/08/10 APPR: BWOODMAN	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED) mm INCH 4 PLACES ±--- ±--- 3 PLACES ±--- ±--- 2 PLACES ±--- ±--- 1 PLACE ±--- ±--- ANGULAR ±---° DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS
	▽=0 ▽C=0	
REV C	DESCRIPTION	

DIMENSION STYLE IN/MM		SCALE NTS	DESIGN UNITS INCH	THIRD ANGLE PROJECTION
DRAWN BY LHARTMAN	DATE 2009/07/17	TITLE MICRO-CHANGE 4P MA ST DK SHLD PVC CABLE		
CHECKED BY BWOODMAN	DATE 2009/07/29	MOLEX INCORPORATED		
APPROVED BY		MATERIAL NO.	DOCUMENT NO. SD-120072-006	SHEET NO. 1 OF 1
SIZE A	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			