

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Emergency stop switch in IP65 housing, in conjunction with appropriate evaluation unit suitable for use up to PL e (EN ISO 13849-1), SIL 3 (EN IEC 62061), surface installation, 5-pos. M12 connection

Product description

Phoenix Contact emergency stop switches are electromechanical switching devices with a safety function. They are used to safely shut down or stop machines and systems in order to prevent or minimize personal injury and property damage. The portfolio includes a modular system as well as a preconfigured solution. The preconfigured emergency stop switch is ready for immediate use and is connected via a 5-position M12 male connector. Thanks to the robust design, the emergency stop switches can be used flexibly and can be integrated directly into the machine.

Your advantages

- IP65 degree of protection allows mounting directly in the machine
- Reduction of wiring errors with uniform 5-position M12 connection
- Rapid on-site diagnostics with color-coded switching position indicator
- In applications with appropriate evaluation device suitable for use up to PL e (EN ISO 13849-1), SIL 3 (EN IEC 62061)

Commercial data

| | |
|--------------------------------------|---------------|
| Item number | 1221735 |
| Packing unit | 1 pc |
| Minimum order quantity | 1 pc |
| Sales key | DN04 |
| Product key | DNA622 |
| GTIN | 4063151311100 |
| Weight per piece (including packing) | 223.3 g |
| Weight per piece (excluding packing) | 223.3 g |
| Customs tariff number | 85365080 |
| Country of origin | DE |

PSR-ESS-M2-H110-2000-A - Emergency stop switch



1221735

<https://www.phoenixcontact.com/us/products/1221735>

Technical data

Notes

Note on application

| | |
|---------------------|-------------------------|
| Note on application | Only for industrial use |
|---------------------|-------------------------|

Product properties

| | |
|--------------|-----------------------|
| Product type | Emergency stop switch |
|--------------|-----------------------|

Data management status

| | |
|------------------|----|
| Article revision | 01 |
|------------------|----|

Insulation characteristics

| | |
|----------------------|---|
| Overvoltage category | III (applies to the installed contact module) |
| Pollution degree | 3 (applies to the installed contact module) |


Electrical properties

| | |
|---------------------|--------|
| Rated surge voltage | 1.5 kV |
|---------------------|--------|

Connection data

| | |
|-------------------|-------------------------|
| Connection method | M12 connector (A-coded) |
|-------------------|-------------------------|

Dimensions

| | |
|---------------------|--|
| Dimensional drawing |  |
| Width | 72 mm |
| Height | 72 mm |
| Depth | 110 mm |

Material specifications

| | |
|--|---------------------------|
| Color (Mushroom head button) | red (RAL 3001) |
| Color (Upper housing part) | yellow (RAL 1018) |
| Color (Lower housing part) | black (RAL 9005) |
| Flammability rating according to UL 94 | V2 (Actuator) |
| | V0 (Contact element) |
| | V2 (Housing) |
| | UR (M12 plug UR-approved) |
| Housing material | PA |

PSR-ESS-M2-H110-2000-A - Emergency stop switch



1221735

<https://www.phoenixcontact.com/us/products/1221735>

Environmental and real-life conditions

Ambient conditions

| | |
|---|---|
| Degree of protection | IP65 |
| Ambient temperature (operation) | -25 °C ... 60 °C |
| Ambient temperature (storage/transport) | -25 °C ... 85 °C |
| Maximum altitude | max. 2000 m (Above sea level) |
| Shock | 15g / 11 ms, in accordance with IEC 60068-2-27 |
| Vibration (operation) | 10 Hz ... 500 Hz, 0.35 mm amplitude, 5g, in accordance with IEC 60068-2-6 |

Mounting

| | |
|-------------------|-------------------------|
| Mounting type | Surface installation |
| Assembly note | Mounting hole: Ø 4.2 mm |
| Mounting position | any |

PSR-ESS-M2-H110-2000-A - Emergency stop switch




1221735

<https://www.phoenixcontact.com/us/products/1221735>

Drawings

Dimensional drawing

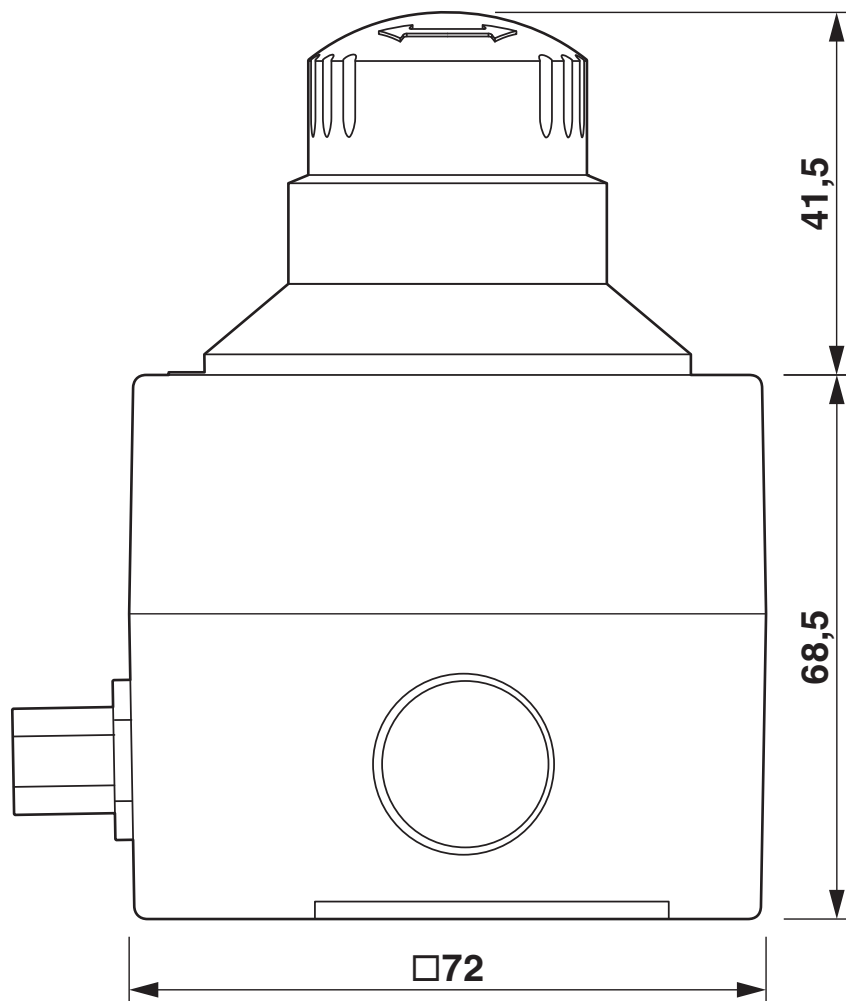

Dimensions (in mm)

PSR-ESS-M2-H110-2000-A - Emergency stop switch



1221735

<https://www.phoenixcontact.com/us/products/1221735>

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-11.0 | 27371216 |
| ECLASS-13.0 | 27371216 |
| ECLASS-12.0 | 27371216 |

ETIM

| | |
|----------|----------|
| ETIM 9.0 | EC000225 |
|----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 39122200 |
|-------------|----------|

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com