

2814715

<https://www.phoenixcontact.com/us/products/2814715>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



MCR current transducer, programmable and configurable, for measuring direct, alternating and distorted currents, input current 0...0.2 to 0...11 A, unconfigured

Your advantages

- True r.m.s. value measurement
- Device can be set via DIP switches or MCR/PI-CONF-WIN configuration software
- 3-way isolation

Commercial data

Item number	2814715
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	C444
Product key	CK4A33
Catalog page	Page 230 (C-5-2019)
GTIN	4017918169275
Weight per piece (including packing)	185.5 g
Weight per piece (excluding packing)	180 g
Customs tariff number	85437090
Country of origin	DE

MCR-S-1-5-UI-DCI-NC - Current transducers



2814715

<https://www.phoenixcontact.com/us/products/2814715>

Technical data

Product properties

Product type	Current transducer
Data management status	
Article revision	17
Insulation characteristics	
Overvoltage category	III
Pollution degree	2

Electrical properties

Total error	≤ 1.5 % (Temperature range)
Maximum power dissipation for nominal condition	2.2 W
Measuring category	III
Test voltage output/power supply	500 V AC (50 Hz, 60 s)
Test voltage input/output	4 kV AC (50 Hz, 60 s)
Test voltage input/power supply	4 kV AC (50 Hz, 60 s)
Protective circuit	Surge protection; 33 V suppressor diode
Step response (10-90%)	330 ms (AC)
	40 ms (DC)
Temperature coefficient, typical	< 0.025 %/K
Maximum transmission error	< 0.5 % (of nominal range value under nominal conditions)
Rated insulation voltage	300 V AC (to earth)

Supply

Supply voltage range	20 V DC ... 30 V DC
Max. current consumption	< 40 mA (without load)

Input data

Measurement

Number of inputs	3
Configurable/programmable	Yes, unconfigured
Input current range	0 A AC/DC ... 11 A AC/DC (Permitted continuous overload: 120%)
Measuring range	0 A AC/DC ... 1 A AC/DC
	0 A AC/DC ... 5 A AC/DC
	0 A AC/DC ... 10 A AC/DC
	0 A AC/DC ... 11 A AC/DC
Setting range for min. input current	0 mA AC/DC ... 200 mA AC/DC
Setting range for max. input current	0 A AC/DC ... 11 A AC/DC
LSB: Current	1 µA (1 A)
	2 µA (2 A)
	5 µA (5 A)
	10 µA (10 A)

MCR-S-1-5-UI-DCI-NC - Current transducers



2814715

<https://www.phoenixcontact.com/us/products/2814715>

	50 μ A (50 A)
	100 μ A (100 A)
Overload capacity	$2 \times I_N$ (continuous)
Surge strength	$20 \times I_N$ (1 s)
Frequency measuring range	15 Hz ... 400 Hz
Curve type	AC, DC or distorted currents
Operate threshold	2 % (of measuring range nominal value 1/5/10 A)

Output data

Signal: Voltage/current

Configurable/programmable	Yes, unconfigured
Voltage output signal	0 V ... 5 V
	1 V ... 5 V
	0 V ... 10 V
	2 V ... 10 V
	-5 V ... 5 V
	-10 V ... 10 V
	10 V ... 0 V
	10 V ... 2 V
	10 V ... -10 V
	5 V ... 0 V
	5 V ... 1 V
	5 V ... -5 V
Current output signal	0 mA ... 20 mA
	4 mA ... 20 mA
	20 mA ... 0 mA
	20 mA ... 4 mA
Load/output load voltage output	> 10 k Ω
Load/output load current output	< 500 Ω

Connection data

Connection method	Screw connection
Stripping length	8 mm
Screw thread	M3
Conductor cross section rigid	0.2 mm ² ... 2.5 mm ²
Conductor cross section flexible	0.2 mm ² ... 2.5 mm ²
Conductor cross section AWG	24 ... 14

Signaling

Status display	LED (green)
----------------	-------------

Dimensions

Item dimensions

MCR-S-1-5-UI-DCI-NC - Current transducers



2814715

<https://www.phoenixcontact.com/us/products/2814715>

Width	22.5 mm
Height	99 mm
Depth	114.5 mm

Material specifications

Color	green (RAL 6021)
Housing material	Polyamide PA non-reinforced

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-20 °C ... 60 °C
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Altitude	< 2000 m
Permissible humidity (operation)	10 % ... 95 % (non-condensing)

Approvals

CE

Certificate	CE-compliant
-------------	--------------

UL, USA/Canada

Identification	Class I, Zone 2, AEx nA nC IIC T4, Ex nA nC IIC T4 Gc X Class I, Div. 2, Groups A, B, C and D or Non-Hazardous Locations Only
----------------	--

EMC data

Electromagnetic compatibility	Conformance with EMC directive
Low Voltage Directive	Conformance with Low Voltage Directive
Noise immunity	EN 61000-6-2
Noise emission	EN 61000-6-4

Standards and regulations

Standards/regulations	IEC 61010-2-030
-----------------------	-----------------

Mounting



Mounting type	DIN rail mounting
Mounting position	any

MCR-S-1-5-UI-DCI-NC - Current transducers

2814715

<https://www.phoenixcontact.com/us/products/2814715>

Drawings

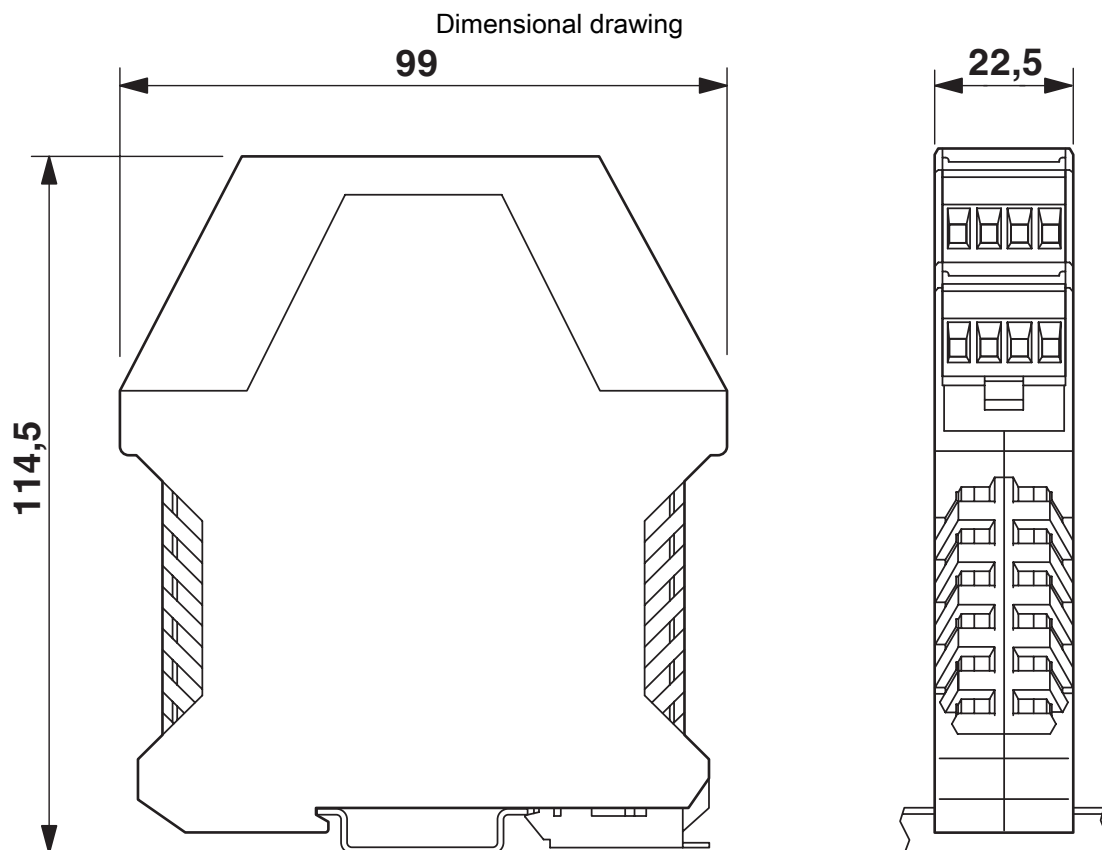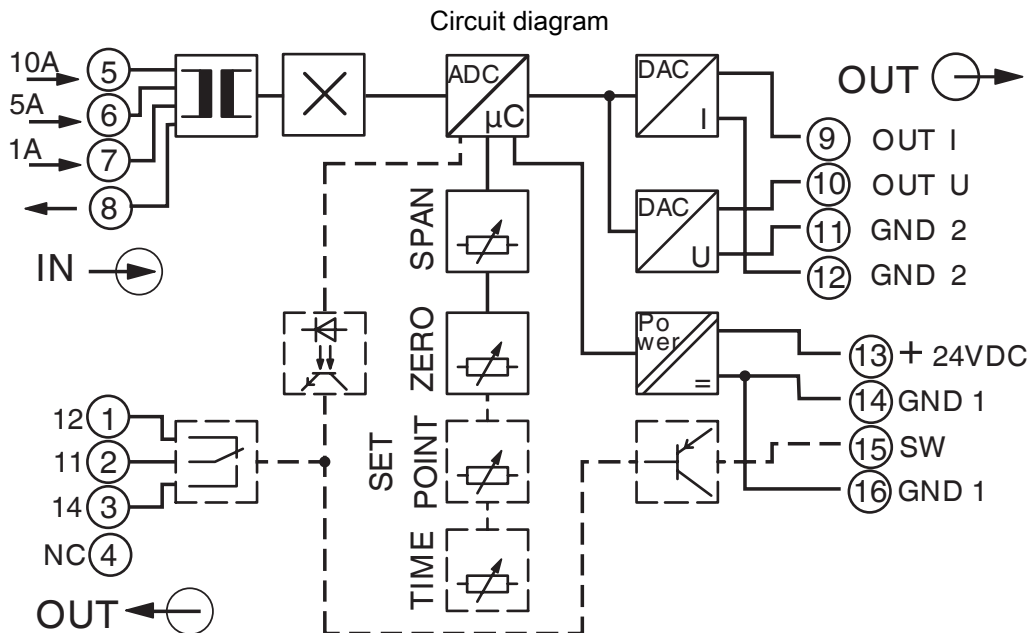


MCR-S-1-5-UI-DCI-NC - Current transducers

2814715

<https://www.phoenixcontact.com/us/products/2814715>



Dimensional drawing

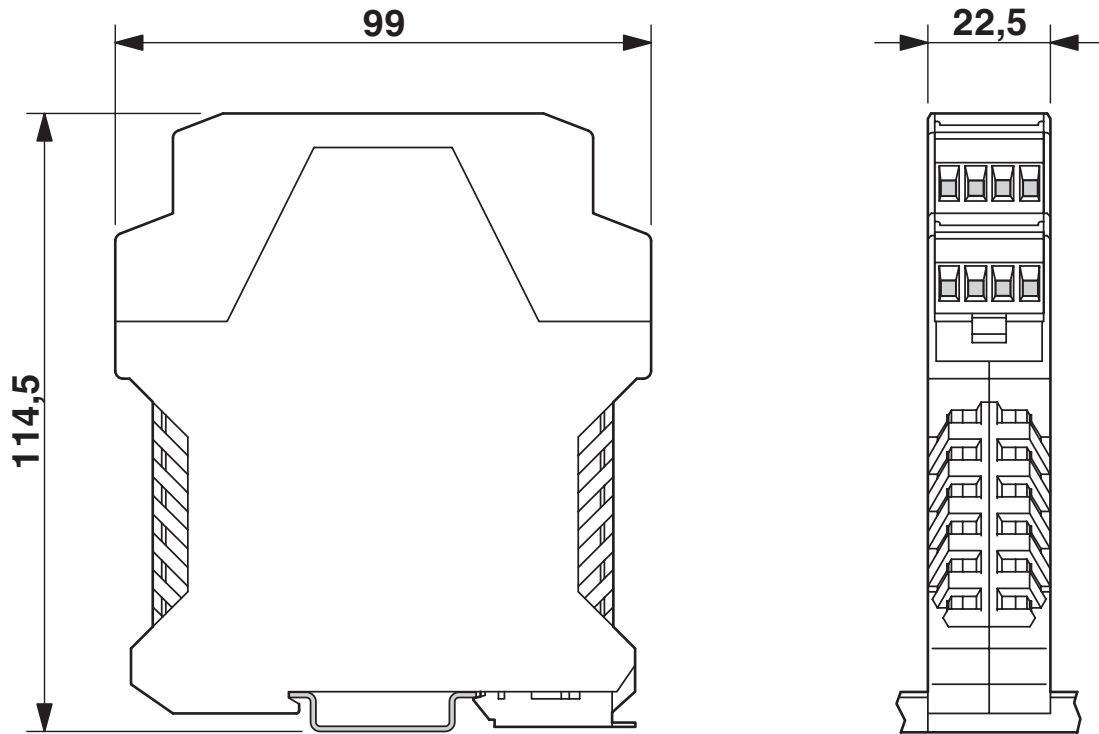

MCR-S-1-5-UI-DCI-NC - Current transducers



2814715

<https://www.phoenixcontact.com/us/products/2814715>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2814715>



cUL Recognized

Approval ID: E238705



UL Recognized

Approval ID: E238705



EAC

Approval ID: RU*DE.*08.B.01852-19



cUL Listed

Approval ID: FILE E 199827



UL Listed

Approval ID: FILE E 199827

cULus Recognized

cULus Listed

MCR-S-1-5-UI-DCI-NC - Current transducers



2814715

<https://www.phoenixcontact.com/us/products/2814715>

Classifications

ECLASS

ECLASS-11.0	27210123
ECLASS-12.0	27210123
ECLASS-13.0	27210123

ETIM

ETIM 9.0	EC002475
----------	----------

UNSPSC

UNSPSC 21.0	39121000
-------------	----------

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c), 7(a), 7(c)-I

China RoHS

Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

EU REACH SVHC

REACH candidate substance (CAS No.)	Hexahydromethylphthalic anhydride(CAS: n/a)
	Lead(CAS: 7439-92-1)
SCIP	38c583fc-a97e-4912-9e18-8facc1ed1f15