

## Turbo Light

TLDM-87RG-930-Q



### More Information



[Spec Sheet](#)



[UL Recognized](#)



RoHS Compliant

### Specifications


Revision: 10.17

Turbo Light Duo; Red/Green Continuous Medium Bright Output Indicator; Panel Mount Case and Quick Connect Blades with Quick Connect Blades Termination

<b>Mounting:</b>	Panel Mount
<b>Operating Mode:</b>	Multiple Color Indicator
<b>Operating Voltage:</b>	9-30 Vdc
<b>Typical Operating Current:</b>	145 mA at 9 Vdc 50 mA at 30 Vdc
<b>Typical Brightness:</b>	2000 cd/m <sup>2</sup> , at 9 Vdc, at 25°C 9000 cd/m <sup>2</sup> , at 30 Vdc, at 25°C
<b>Termination:</b>	Quick Connect Blades
<b>Termination Strength:</b>	Pull test with a maximum of 22 pounds (10 kg) load
<b>Operating Temperature:</b>	-40_C to +85_C
<b>Storage Temperature:</b>	-40_C to +100_C
<b>Surge Voltage:</b>	20% over maximum rated voltage for less than 5 minutes
<b>Reverse Voltage Protection:</b>	To the maximum operating voltage
<b>Construction Materials:</b>	Lens/Case- White Translucent Polycarbonate 94 VO Potting- 2 parts epoxy resin or silicone, black
<b>Gasket:</b>	
<b>Environmental Durability:</b>	ASTM B117 Certified - Withstands exposure to salt spray for 300 hours IP 68 Certified - Withstands water submergence and dust exposure Humidity- 95% relative humidity at +40_C continuously for 100 hours. Vibration- Withstands vibration between 0 and 55 Hz. on all axes.
<b>Life Expectancy:</b>	18 years under normal operating conditions.
<b>Warranty:</b>	For a period of two years from the date of manufacture under normal operating conditions.

[View Terms and Conditions of Sale](#)

## Dimensions

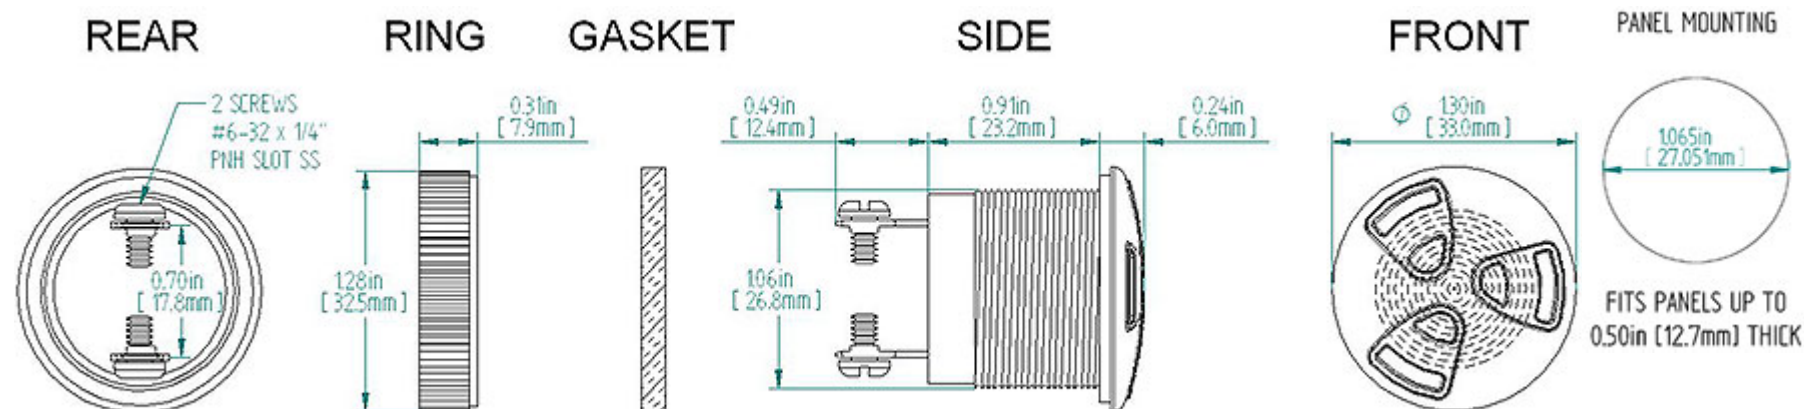

TOLERANCES ARE  $\pm 0.03$ in ( $\pm 0.76$ mm) UNLESS OTHERWISE SPECIFIED

### "S" TERMINALS

