

printed on 2 Aug 2022 17:23 (China Standard Time) from FG086075






D

B


A

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

REVISIONS				
P	LTR	DESCRIPTION	DATE	DWN
	AI	REVISED	02AUG2022	J.J N.S

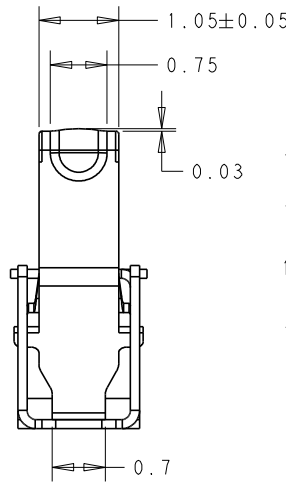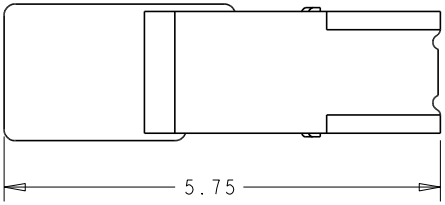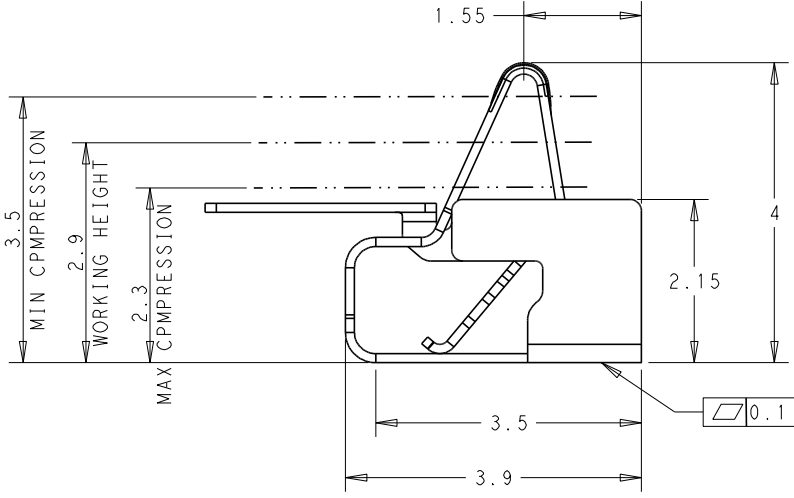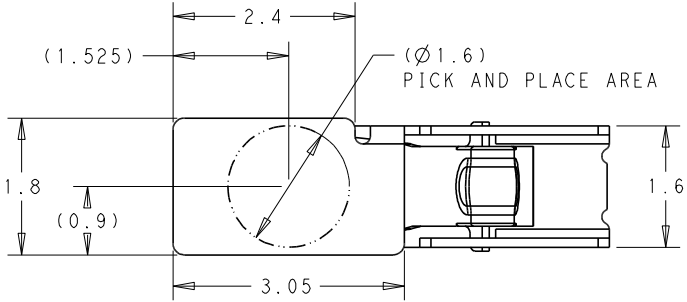

SCALE 10:1

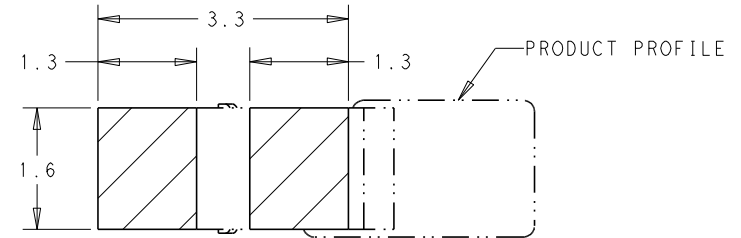

RECOMMENDED P.C.B LAYOUT TOLERANCE ±0.05

1. PART NUMBER: 2343297-2.
2. MATERIAL: SUS301 K1500.THICKNESS=0.12mm.
3. FINISH : 2.0~7.6um NICKEL UNDERLAYER ALL OVER .
0.38um MIN. GOLD PLATING ON CONTACT AREA.
0.08~0.6um GOLD PLATING ON SOLDER AREA.
- 4 NORMAL FORCE: 0.7N MIN(INITIAL) AT WORKING RANGE.
0.6N MIN AFTER DURABILITY EVALUATION.
5. WORKING RANGE: 2.30mm ~ 3.50 mm

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN JONE J1 20SEP2018	 TE Connectivity	
		CHK WENKE HF 20SEP2018		
		APVD WENKE HF 20SEP2018	NAME 4.0H SPRING FINGER	
DIMENSIONS: mm		PRODUCT SPEC		
		APPLICATION SPEC		
		WEIGHT		
MATERIAL		CUSTOMER DRAWING	SIZE A3	CAGE CODE 00779
			DRAWING NO C=2343297	RESTRICTED TO
			SCALE 1:1	SHEET 1 OF 2
				REV A1

D

C

B

A

printed on 2 Aug 2022 17:23 (China Standard Time) from FG086075

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20



© COPYRIGHT 20

BY -

ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD

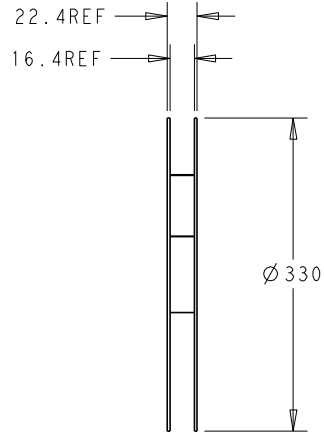


WITH PRODUCT CHARGE
1700 EA/REEL
NO EMPTY POCKETS
ARE PERMITTED

PEELING ANGLE
165°~180°
PEELING FORCE
0.1N~1.0N

COVER TAPE
100mm MIN WITHOUT CHARGE

USER DIRECTION OF UNREELING →

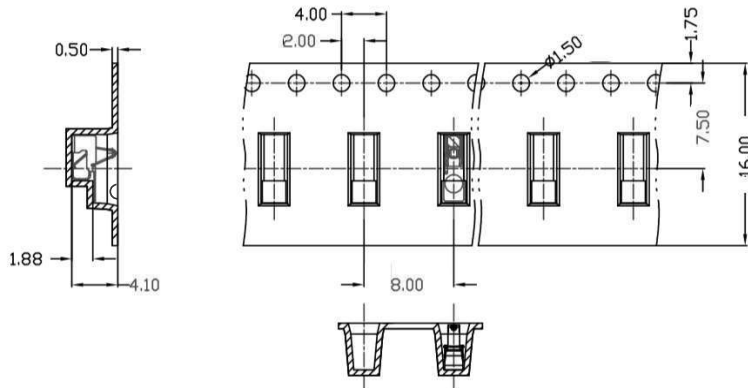

NOTE:
1. PACKAGE SPEC EIA-481-D

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN JONE J1 20SEP2018
CHK WENKE HF 20SEP2018
APVD WENKE HF 20SEP2018
PRODUCT SPEC
APPLICATION SPEC
WEIGHT

STE

TE Connectivity

NAME 4.0H SPRING FINGER

SIZE A3 CAGE CODE 00779 DRAWING NO C-2343297

RESTRICTED TO

CUSTOMER DRAWING

SCALE 1:5

SHEET 2 OF 2

REV A1