



## High-Q Multi-Layer and Broadband Blocking Capacitors

High Speed Capacitors



Advancing the possibilities with the breadth and depth of our industry leading smaller, lighter, extreme temperature stable filters, resonators, and ceramic components for military, space and commercial customers.



## **Company Overview**

Dielectric Laboratories, Inc. (DLI) is your global partner for application specific microwave and millimeter wave components serving customers in fiber optic, wireless, medical, transportation, semiconductor, space, avionics and military markets. With over 35 years of experience, you can turn to DLI with confidence for your high frequency Single-Layer Capacitors, Multi-Layer Capacitors that are difficult to build and tight tolerance, Heat Sinks, Resonators, Filters, and Build-To-Print or Custom Thin Film Components.

DLI offers a broad range of Multi-Layer Capacitor products which are summarized in this catalog. Our products include C04, C06, C07, C08, C11, C17, C18, C22 and C40 High-Q Multi-Layer Capacitors. DLI has the world's most comprehensive array of Broadband Blocking Capacitors. We have the expertise in customizing, tight tolerances and meeting specific design targets. DLI continues to introduce exciting new innovations in custom ceramic resonator and filter technologies. These patent-protected products leverage decades of ceramic and Thin Film experience, creative and clever design expertise, and advanced prototyping and testing capabilities. Please discuss your needs with our Sales and Applications Engineering Team.

We are committed to serving you and thank you for your business.

## **RoHS Compliance Statement**

DLI is a leading supplier to the electronic components market and is fully committed to offering products supporting Restriction of Hazardous Substances (RoHS) directive 2002/95/E. All of our Dielectric formulations are RoHS compliant and we offer a broad range of capacitors with RoHS compliant terminations. DLI complies with the requirements of the individual customer and will maintain product offerings that meet the demands of our industry.

## **Quality and Environmental Policy**

DLI's reputation for quality and environmental responsibility is based on a commitment not only to meet our customers' requirements, but to exceed their expectations. The entire organization, beginning with top management, strives to achieve excellence in designing, manufacturing and delivering high Q capacitors and proprietary thin film components for niche high frequency applications, while maintaining safe and healthy working conditions. Furthermore, DLI commits to achieve these goals in an environmentally responsible manner through our commitment to comply with environmental regulations and implement pollution prevention initiatives. DLI strives to continually improve the effectiveness of our Quality and Environmental Management System through the establishment and monitoring of objectives and targets.

AS9100 and ISO 9001 certified  
ISO 14001 certified





# HIGH Q MULTI-LAYER AND BROADBAND BLOCKING CAPACITORS


## Table of Contents

What's New at DLI	2	Characteristics	12
Simplified Frequency & Application Chart	3	Available Options	12
General Information	4-9	Capacitance & Voltage Table	13
Material & Case Size Summary Sheets	4-5	Performance Graphs by Case Size	14-15
Standard Part Number System	6	CF Series: Ultrastable Porcelain Capacitors	16-19
Multi-Layer Dielectric Materials	7	Description	16
Temperature Coefficient of Capacitance	7	Characteristics	16
Termination Systems	7	Available Options	16
Lead Term Codes	8	Capacitance & Voltage Table	17
Test Level Codes	8	Performance Graphs by Case Size	18-19
Packaging Configurations	8	MS Series: Low ESR, High Volume Ceramic Capacitors	20-23
Case Size Definitions/Charts	9	Description	20
DLI Application Notes	10-11	Characteristics	20
Chip Selection	10	Available Options	20
Dielectric Type	10	Capacitance & Voltage Table	21
Capacitor Size	10	Performance Graphs by Case Size	22 -23
Termination Material	10	NA Series: N30 Porcelain Capacitors	24-25
Solder Leaching	10	UL Series: Ultra Low ESR Ceramic Capacitors	26-30
Packaging	10	Description	26
Attachment Methods	10	Characteristics	26
Soldering	10	Available Options	26
Bonding	10	Capacitance & Voltage Table	27
Cleaning	10	Performance Graphs by Case Size	28-30
DLI Shelf Life	10	C04, C06, C11 & C17 Kits	31
Board Design Considerations	11	Broadband Blocks	32
Recommended Pad Spacing Dimensions	11	Performance Graphs by Case Size	32
Recommended Printed Wire Board Patterns	11	Opti-Cap™ Ultra Broadband DC Blocking	33
Temperature Precautions	11	Milli-Cap® SMD Millimeter Wave Capacitor	34
MLC Orientation; Horizontal & Vertical Mounting	11	CapCad™	35
AH Series: P90 Porcelain Capacitors	12-15	Other DLI Product Lines	36
Description	12	Contact Page	38

## “NA” Material temperature compensating capacitors.


DLI is now offering our proprietary NA dielectric formulation in a variety of MLC case sizes. With its negative temperature coefficient of capacitance (N30+/-15ppm/°C), this high-Q porcelain dielectric is ideal for temperature compensating situations.

NA is offered as a drop-in replacement for most AH/CF part numbers, please contact our sales representatives for details.

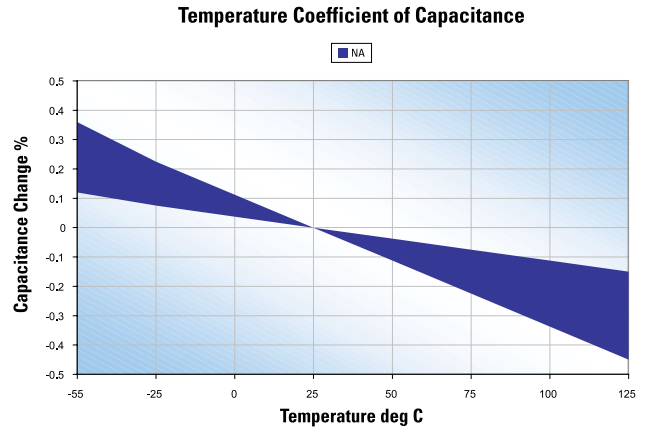

## Extreme leach resistant terminations.

Engineering teams like to put our parts through their paces. When design engineers told us they'd like a termination that would allow them the freedom to use harsh solder profiles and multiple reworks, we listened! DLI has qualified enhanced versions of its RoHS compliant terminations designed to handle both the rigors of the test bench and the production floor with ease. The enhanced terminations are available in both standard (term code: E) and non-magnetic (term code: H) finishes. Please contact our sales team for more details.

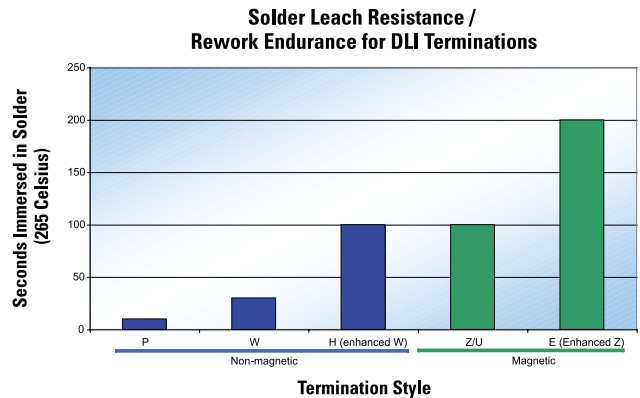

## Tuning Rod Kits


DLI-designed tuning rods to utilize our C06, C11 or C17 capacitors of a specified value attached to our High-Q insulating holder to find the optimum capacitor for a particular circuit or application without soldering capacitors. Using a range of capacitance values around the nominal value will allow for quick selection of the appropriate capacitance and then the selection of the correct surface mount capacitor from DLI.



## High Voltage 1111 case size.

DLI is please to introduce the new C18 series of enhanced voltage high-Q porcelain capacitors. With voltage ratings up to 2000V, the C18 is designed to be the most robust “1111” high-Q capacitor available today. The C18 is available in both our ultra stable (0±15ppm/°C) CF and temperature compensating (+90ppm/°C) AH dielectrics, and is form-factor compatible with our existing line of C17 “1111” capacitors. See pages 13 and 17 for more information!

# Simplified Frequency & Product Application Chart

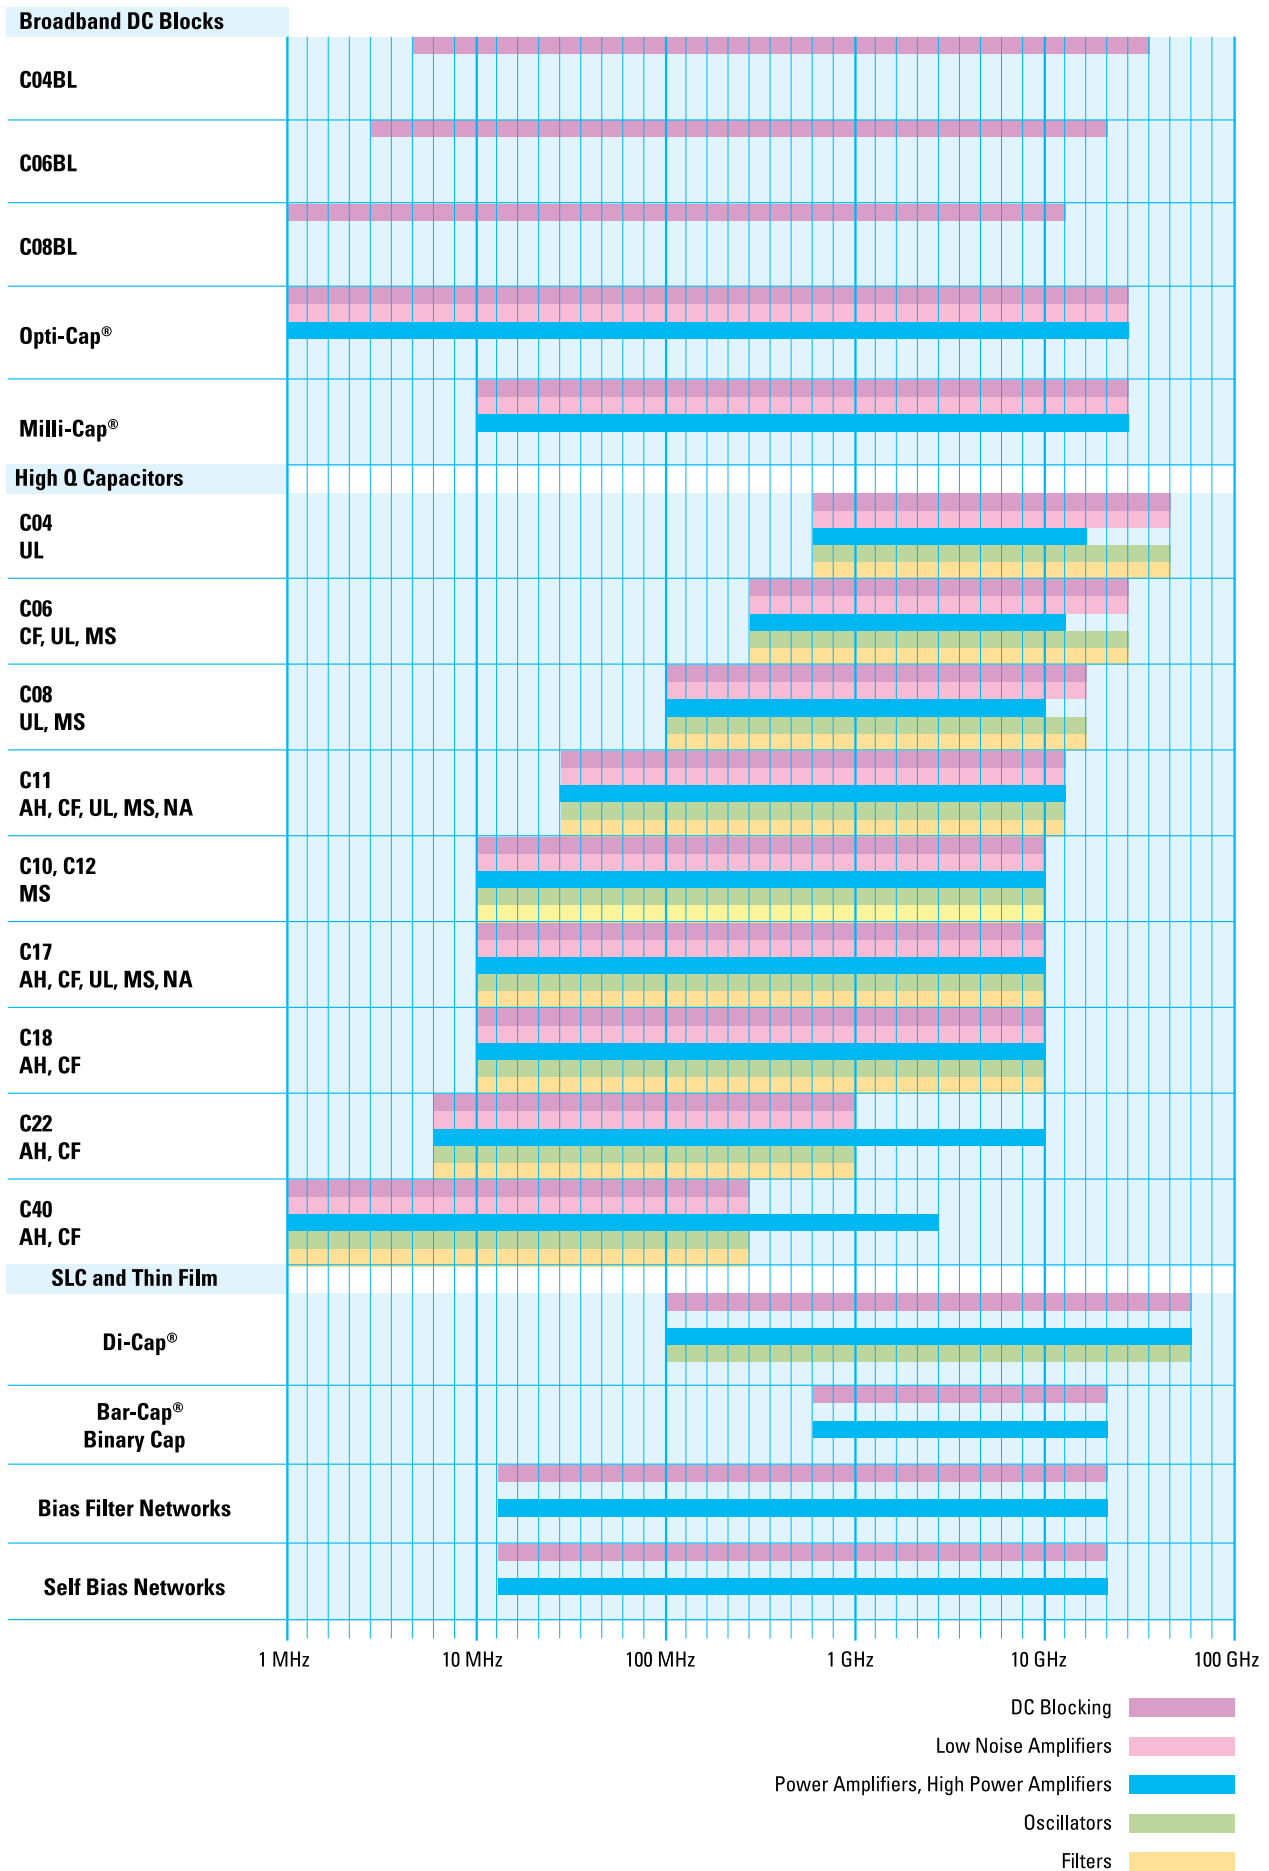

# Material & Case Size Summary Sheets

	DLI Series	Case Size Footprint in. (mm)	Cap Value Range (pF)	Cap (pF)	Typical ESR			Series Resonance (MHz)	Working Voltage (WVDC) max	
					150 MHz	500 MHz	1 GHz			
<b>AH</b> TCC (ppm/°C) (-55° to +125°C) Porcelain (P90) +90 ±20	C11AH	.055 x .055 (1.40 x 1.40)	0.1 to 100	1	0.067	0.080	0.136	9200	250	
				10	0.044	0.071	0.104	3000		
				100	0.032	0.055	0.086	1000		
	C17AH	.110 x .110 (2.79 x 2.79)	0.1 to 1000	1	0.059	0.063	0.114	9064	1000	
				10	0.039	0.060	0.085	3100		
				100	0.024	0.050	0.074	1290		
	C18AH	.110 x .110 (2.79 x 2.79)	0.1 to 1000	10	0.059	0.094	0.138	3100	1000	
				100	0.028	0.069	0.109	1290		
				1000	0.023	0.063	–	400		
	C22AH	.220 x .245 (5.84 x 6.35)	1 to 2700	10	0.074	0.207	0.249	2480	2500	
				100	0.048	0.116	0.190	1000		
				1000	0.028	0.140	–	320		
				2700	0.027	–	–	214		
						<b>10MHz</b>	<b>30MHz</b>	<b>100MHz</b>		
	C40AH	.380 x .380 (9.65 x 9.65)	1 to 5100	15	0.066	0.033	0.027	2100	7200	
				100	0.018	0.026	0.052	680		
				1000	0.009	0.017	0.033	210		
				5100	0.008	0.016	0.033	95		

	DLI Series	Case Size Footprint in. (mm)	Cap Value Range (pF)	Cap (pF)	Typical ESR			Series Resonance (MHz)	Working Voltage (WVDC) max	
					150 MHz	500 MHz	1 GHz			
<b>CF</b> TCC (ppm/°C) (-55° to +125°C) Porcelain (NP0) 0 ±15	C06CF	.063 x .030 (1.60 x 0.80)	0.1 to 47	1	0.182	0.276	0.428	10300	250	
				10	0.095	0.159	0.243	3200		
				47	0.081	0.127	0.173	1400		
	C11CF	.055 x .055 (1.40 x 1.40)	0.1 to 100	1	0.073	0.089	0.146	9900	250	
				10	0.049	0.075	0.107	3100		
				100	0.040	0.073	0.111	970		
	C17CF	.110 x .110 (2.79 x 2.79)	0.1 to 1000	1	0.073	0.082	0.124	9060	1000	
				10	0.065	0.098	0.136	3100		
				100	0.041	0.070	0.102	1300		
	C18CF	.110 x .110 (2.79 x 2.79)	0.1 to 1000	1000	0.034	0.073	–	400	1000	
				1	0.068	0.086	0.158	9060		
				10	0.058	0.087	0.118	3100		
	C22CF	.220 x .245 (5.84 x 6.35)	1 to 2700	10	0.072	0.113	0.164	2480	2500	
				100	0.047	0.079	0.119	1000		
				1000	0.036	0.067	–	320		
				2700	0.035	–	–	214		
						<b>10MHz</b>	<b>30MHz</b>	<b>100MHz</b>		
	C40CF	.380 x .380 (9.65 x 9.65)	1 to 5100	10	0.121	0.054	0.037	2100	7200	
100				0.044	0.038	0.045	680			
1000				0.032	0.036	0.038	210			
			5100	0.011	0.016	0.040	95			

ESR and Resonance data is of typical performance and can vary from lot to lot.

	DLI Series	Case Size Footprint in. (mm)	Cap Value Range (pF)	Cap (pF)	Typical ESR			Series Resonance (MHz)	Working Voltage (WVDC) max
					150 MHz	500 MHz	1 GHz		
<b>UL</b> TCC (ppm/°C) (-55° to +125°C) Ceramic (NP0) 0 ±30	C04UL	.040 x .020 (1.0 x 0.5)	0.1 to 10	1	0.081	0.095	0.148	9820	200
				5	0.038	0.057	0.088	3930	
				10	0.036	0.058	0.087	2650	
	C06UL	.063 x .030 (1.60 x 0.80)	0.1 to 47	5	0.052	0.072	0.107	1750	250
				15	0.028	0.041	0.064	1010	
				47	0.023	0.043	0.070	570	
	C07UL	.110 x .070 (2.79 x 1.72)	0.1 to 100	5.6	0.053	0.086	0.129	5000	250
				10	0.029	0.041	0.066	3960	
				30	0.017	0.023	0.036	2540	
	C08UL	.080 x .050 (2.0 x 1.27)	0.1 to 100	5.1	0.051	0.078	0.126	6000	250
				9.5	0.041	0.060	0.094	4620	
				11	0.041	0.064	0.103	4340	
	C11UL	.055 x .055 (1.40 x 1.40)	0.1 to 100	2	0.066	0.084	0.125	7530	250
				10	0.037	0.057	0.086	3800	
				100	0.022	0.042	0.081	1430	
	C17UL	.110 x .110 (2.79 x 2.79)	0.1 to 1000	10	0.040	0.056	0.082	2940	1000
				100	0.021	0.035	0.057	910	
				470	0.016	0.029	-	420	

	DLI Series	Case Size Footprint in. (mm)	Cap Value Range (pF)	Cap (pF)	Typical ESR			Series Resonance (MHz)
					150 MHz	500 MHz	1 GHz	
<b>MS</b> TCC (ppm/°C) (-55° to +125°C) Ceramic (NP0) 0 ±30	C06MS	.063 x .030 (1.60 x 0.80)	0.3 to 100	1	0.090	0.135	0.207	10300
				10	0.058	0.099	0.140	3200
				100	0.040	0.073	0.104	1400
	C08MS	.080 x .050 (2.0 x 1.27)	0.2 to 470	1	0.200	0.140	0.190	10300
				10	0.065	0.090	0.140	3200
				100	0.030	0.045	0.065	1400
	C11MS	.055 x .055 (1.40 x 1.40)	0.2 to 220	1	0.160	0.110	0.120	9900
				10	0.060	0.090	0.120	3100
				100	0.035	0.045	0.070	220
	C17MS	.110 x .110 (2.79 x 2.79)	0.3 to 2200	10	0.642	0.097	0.110	3100
				100	0.041	0.076	0.090	1300
				1000	0.028	0.044	0.109	400
2200				0.027	0.040	0.095	200	

See page 21 for Working Voltage Rating (WVDC).

	DLI Series	Case Size Footprint in. (mm)	Cap Value Range (pF)	Cap (pF)	Typical ESR			Series Resonance (MHz)	Working Voltage (WVDC) max
					150 MHz	500 MHz	1 GHz		
<b>NA</b> TCC (ppm/°C) (-55° to +125°C) Ceramic (NP0) N30 0 ±15	C11NA	.055 x .055 (1.40 x 1.40)	0.1 to 100	1	0.091	0.166	0.235	8796	
				10	0.064	0.117	0.166	2994	
				100	0.046	0.083	0.117	1019	
	C17NA	.110 x .110 (2.79 x 2.79)	0.1 to 1000	1	0.047	0.086	0.121	10360	
				10	0.033	0.061	0.085	3238	
				100	0.024	0.043	0.060	1012	
				1000	0.017	0.030	0.043	316	

Consult factory for additional case size data.

# Multi-Layer – Standard P/N System

# C 17 CF 620 J - 7 U N - X 0 T

Multi-Layer Capacitor    Case Size    Material System    Capacitance Value    Tolerance    Voltage Code    Termination Code    Leading Code    Test Level Code    Laser Marking Code    Packaging

## Case Size 17

Case	Dimensions
04	0.040" x 0.020"
06	0.060" x 0.030"
07	0.110" x 0.070"
08	0.080" x 0.050"
10*	0.120" x 0.010"
11	0.055" x 0.055"
12*	0.120" x 0.060"
17	0.110" x 0.110"
18	0.110" x 0.110"
20*	0.220" x 0.200"
22	0.220" x 0.220"
36*	0.360" x 0.040"
40	0.380" x 0.380"

## Material CF

Material	Characteristics
AH	P90 High-Q
CF	NPO High-Q
MS	NPO High-Q
UL	Ultra Low ESR-NPO
BL	DC Blocking Ultra
NA	N30 High-Q

\* MS Material only

## Capacitance 620

Code	Value
A	± 0.05pF
B	± 0.1pF
C	± 0.25pF
D	± 0.5pF
F	± 1%
G	± 2%
J	± 5%
K	± 10%
M	± 20%
X	GMV
S	SPECIAL

## Tolerance J

Code	Value
A	± 0.05pF
B	± 0.1pF
C	± 0.25pF
D	± 0.5pF
F	± 1%
G	± 2%
J	± 5%
K	± 10%
M	± 20%
X	GMV
S	SPECIAL

<10pF A, B, C, D  
>10pF F, G, J, K, M

## Voltage 7

Code	Voltage
5	50V
1	100V
8	150V
6	200V
9	250V
3	300V
4	500V
7	1000V
A	1500V
G	2000V
B	2500V
D	3600V
F	5000V
H	7200V
S	SPECIAL

## Termination U

Code	Termination System	RoHS
T	Ag Termination, Ni Barrier Layer, Heavy SnPb Plated Solder	
U	Ag Termination, Ni Barrier Layer, SnPb Plated Solder	
S	Ag Termination, Ni Barrier Layer, Gold Flash	RoHS
Z	Ag Termination, Ni Barrier Layer, Sn Plated Solder	RoHS
E	Ag Termination, Enhanced Ni Barrier, Sn Plated Solder	RoHS
P**	AgPd Termination	RoHS
Q	Polymer Termination, Ni Barrier Layer, Sn Plated Solder	RoHS
Y	Polymer Termination, Ni Barrier Layer, SnPb Plated Solder	
M**	Polymer Termination, Cu Barrier Layer, Sn Plated Solder	RoHS
W**	Ag Termination, Cu Barrier Layer, Sn Plated Solder	RoHS
H**	Ag Termination, Enhanced Cu Barrier, Sn Plated Solder	RoHS
V**	Ag Termination, Cu Barrier Layer, SnPb Plated Solder	
R**	Ag Termination, Cu Barrier Layer, Heavy SnPb Plated Solder	

**NOTE: All fields are required. Any specials, please consult factory.**

\*\* Nonmagnetic

## Leading N

Code	Lead Type
A	Axial Ribbon
B	Radial Ribbon
C	Center Ribbon
D	Specialty Customer Defined
E	Axial Wire
F	Radial Wire
N	NONE

NOTE: Consult Sales Representative for RoHS compliant leaded devices

## Test Level X

Code	Testing
X	Commercial or Industrial
Y	Reduced Visual
A	MIL-PRF-55681 Group A
C	MIL-PRF-55681 Group C
D	Customer Specified

## Laser Mark 0

Code	Laser Marking
0	No marking
1	Single-side marked
2	Double-side marked
3*	Large single-side marked
4*	Large double-side marked
5	Vertical edge marked
9	Customer Specified

\*Reduces DWV Rating.

## Packaging T

Code	Packaging
T	Tape & Reel – Horizontal
V	Tape & Reel – Vertical
W	Waffle Pack
B	Bulk
P	Plastic Box
R	Tube (Rail)
S	Customer Specified



## DLI Multi-Layer Dielectric Materials


Dielectric Code	Temperature Coefficient -55°C to +125°C (ppm/°C Maximum)	Dissipation Factor @ 1 MHz (% Maximum)	Insulation Resistance (MΩ)	
			@ +25°C	@ +125°C
AH	P90 ± 20	0.05	>10 <sup>6</sup>	>10 <sup>5</sup>
CF	0 ± 15	0.05	>10 <sup>6</sup>	>10 <sup>5</sup>
UL	0 ± 30	0.05	>10 <sup>5</sup>	>10 <sup>4</sup>
MS	0 ± 30	0.05	>10 <sup>5</sup>	>10 <sup>4</sup>
*BL	± 15%	2.50	>10 <sup>4</sup>	>10 <sup>3</sup>
NA	N30 ± 15	0.05	>10 <sup>6</sup>	>10 <sup>5</sup>

All test conditions are per MIL-PRF-55681 revision A.  
\*Broadband Blocks only.

Dissipation Factor applies to values of 4.7pF or greater.

Other Dielectric formulations may be available, please contact your Sales Representative.

## Temperature Coefficient of Capacitance

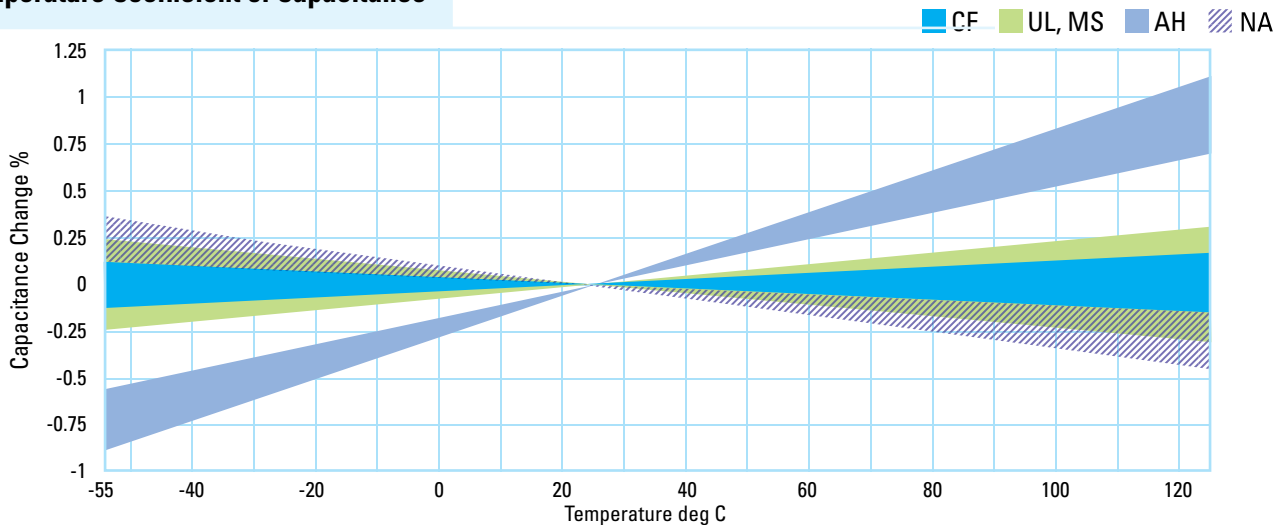






## Termination Systems

Code	Termination System	Application	Code	Termination System	Application
T	Ag Termination Ni Barrier Layer Heavy SnPb Plated Solder	<ul style="list-style-type: none"> <li>High Reliability Applications</li> <li>Hand Soldering</li> </ul>	Y	Polymer Termination Ni Barrier Layer Sn Plated Solder	<ul style="list-style-type: none"> <li>Resistant to Cracking</li> <li>High Reliability Applications</li> <li>High Volume &amp; Hand Solder Assembly</li> </ul>
U	Ag Termination Ni Barrier Layer SnPb Plated Solder	<ul style="list-style-type: none"> <li>High Reliability Applications</li> <li>High Volume &amp; Hand Solder Assembly</li> </ul>	M RoHS	Polymer Termination Cu Barrier Layer Sn Plated Solder	<ul style="list-style-type: none"> <li>Resistant to Cracking</li> <li>Non-Magnetic Application</li> <li>High Volume &amp; Hand Solder Assembly</li> </ul>
S RoHS	Ag Termination Ni Barrier Layer Gold Flash	<ul style="list-style-type: none"> <li>Specialty Solder, Epoxy Applications</li> <li>Standard for 0402</li> </ul>	W RoHS	Ag Termination Cu Barrier Layer Sn Plated Solder	<ul style="list-style-type: none"> <li>Non-Magnetic Application</li> <li>High Volume</li> </ul>
Z RoHS	Ag Termination Ni Barrier Layer Sn Plated Solder	<ul style="list-style-type: none"> <li>High Volume &amp; Hand Solder Assembly</li> </ul>	H RoHS	Ag Termination Enhanced Cu Barrier Sn Plated Solder	<ul style="list-style-type: none"> <li>Non-Magnetic Applications</li> <li>High Vol. &amp; Hand Solder Assembly</li> <li>Ultra Leach Resistant</li> </ul>
E RoHS	Ag Termination Enhanced Ni Barrier Sn Plated Solder	<ul style="list-style-type: none"> <li>High Volume &amp; Hand Solder Assembly</li> <li>Ultra Leach Resistant</li> </ul>	V	Ag Termination Cu Barrier Layer SnPb Plated Solder	<ul style="list-style-type: none"> <li>Non-Magnetic Applications</li> <li>High Reliability Applications</li> <li>High Volume &amp; Hand Solder Assembly</li> </ul>
P RoHS	AgPd Termination	<ul style="list-style-type: none"> <li>Non-Magnetic Applications</li> </ul>	R	Ag Termination Cu Barrier Layer Heavy SnPb Plated Solder	<ul style="list-style-type: none"> <li>Non-Magnetic Applications</li> <li>High Reliability Applications</li> <li>Hand Soldering</li> </ul>
Q RoHS	Polymer Termination Ni Barrier Layer Sn Plated Solder	<ul style="list-style-type: none"> <li>Resistant to Cracking</li> <li>High Volume &amp; Hand Solder Assembly</li> </ul>			

# General Information

## Lead Termination Codes

Axial Ribbon Code A	Radial Ribbon Code B	Center Ribbon Code C	Axial Wire Lead Code E	Radial Wire Lead Code F
				

Leads are attached with high melting point solder (HMP) at 296°C.

## Test Level Codes

Test code	Inspection Description (see individual part pages for additional detail)
Y	100% IR, 1% AQL visual, 1% AQL Electrical (DWV, Cap., DF)
X	100% IR, 100 % visual, 1% AQL Electrical (DWV, Cap., DF)
A	Group A testing per MIL – PRF – 55681
C	Group C testing per MIL – PRF – 55681
D	Customer Defined

## Packaging Configurations

Case Style	Size L x W	7" Reel, 8mm Tape		7" Reel, 16mm Tape	13" Reel, 16mm Tape	2" x 2" Waffle Pack
		Horizontal Orientation	Vertical Orientation	Horizontal Orientation	Horizontal Orientation	
C04	0.040" x 0.020"	5000				
C06	0.060" x 0.030"	4000				108
C07	0.110" x 0.070"	750				
C08	0.080" x 0.050"	5000	3100			108
C11	0.055" x 0.055"	3500	3100			108
C17	0.110" x 0.110"	2350	750			49
C18	0.110" x 0.110"	2350	750			49
C22	0.220" x 0.245"	500				
C40	0.380" x 0.380"	250		250	1300	

Typically a minimum 500 piece order for tape and reel packaging.

Standard Packaging: Bulk in plastic bags.

Consult factory for custom packaging solutions.

## Packaging Configurations for MS

Case Style	Size L x W	7" Reel, 8mm Tape		13" Reel, 16mm Tape		Case Style	Size L x W	7" Reel, 8mm Tape		13" Reel, 16mm Tape	
		Horizontal Orientation	Vertical Orientation	Horizontal Orientation	Vertical Orientation			Horizontal Orientation	Vertical Orientation	Horizontal Orientation	Vertical Orientation
C04	0.040" x 0.020"	16,000	16,000			C17	0.110" x 0.110"	1,000			4,000
C06	0.060" x 0.030"	4,000	16,000			C18	0.180" x 0.120"	1,000			4,000
C08	0.080" x 0.050"	3,000	12,000			C20	0.220" x 0.200"	1,000			4,000
C10	0.120" x 0.100"	2,000	8,000			C22	0.220" x 0.245"	1,000			4,000
C11	0.055" x 0.055"	2,500	10,000			C36	0.360" x 0.400"	–			500
C12	0.120" x 0.060"	2,500	10,000								

Minimum of one full reel.

Standard Packaging: Bulk in plastic bags.

Consult factory for custom packaging solutions.

## Recommended Pad Spacing Dimensions (inches)

Case Size	Internal Electrode	Reflow Soldering			Wave Soldering		
		A	B	C	A	B	C
C04	Horizontal	0.076	0.036	0.010	0.106	0.036	0.020
	Vertical		Not Recommended			Not Recommended	
C06	Horizontal	0.106	0.051	0.020	0.136	0.051	0.020
	Vertical		Not Recommended			Not Recommended	
C07	Horizontal	0.119	0.141	0.020	0.149	0.141	0.020
	Vertical		Not Recommended			Not Recommended	
C08	Horizontal	0.127	0.071	0.020	0.157	0.071	0.020
	Vertical	0.127	0.064	0.020	0.157	0.064	0.020
C11	Horizontal	0.114	0.084	0.020	0.144	0.084	0.020
	Vertical	0.114	0.063	0.020	0.144	0.063	0.020
C17	Horizontal	0.182	0.147	0.040	0.212	0.147	0.040
	Vertical	0.182	0.115	0.040	0.212	0.115	0.040
C18	Horizontal	0.182	0.152	0.070	0.212	0.152	0.070
	Vertical	0.182	0.115	0.070	0.212	0.115	0.070
C22	Horizontal	0.282	0.288	0.110	0.312	0.288	0.110
	Vertical		Not Recommended			Not Recommended	
C40	Horizontal	0.445	0.420	0.290	0.475	0.420	0.290
	Vertical		Not Recommended			Not Recommended	

## Case Size Definitions

Case Size	Case Size EIA	Available Termination Style	Width <sup>(1)</sup>				Length <sup>(1)</sup>				Thickness <sup>(1)</sup>		Gap Min (Between Bands)		Band Min <sup>(2)</sup> (Plated)		Band Max <sup>(2)</sup> (Plated)	
			Inches		mm		Inches		mm		Inches	mm	Inches	mm	Inches	mm	Inches	mm
			Min	Max	Min	Max	Min	Max	Min	Max	Inches	mm	Inches	mm	Inches	mm	Inches	mm
04BL	0402	U S	0.014	0.026	0.362	0.667	0.034	0.046	0.869	1.173	0.025	0.640	0.008	0.193	0.004	0.097	0.017	0.427
04UL	0402	S	0.014	0.026	0.362	0.667	0.034	0.046	0.869	1.173	0.025	0.640	0.008	0.193	0.004	0.097	0.017	0.427
06BL	0603	U S Z	0.023	0.038	0.579	0.960	0.051	0.069	1.303	1.760	0.032	0.800	0.010	0.241	0.007	0.169	0.027	0.680
06CF	0603	U S Z E P W H V R	0.023	0.038	0.579	0.960	0.051	0.069	1.303	1.760	0.032	0.800	0.010	0.241	0.007	0.169	0.027	0.680
06UL	0603	U S Z	0.022	0.041	0.555	1.040	0.051	0.076	1.303	1.920	0.033	0.827	0.014	0.362	0.007	0.169	0.027	0.680
07UL	0711	S Z	0.090	0.131	2.292	3.334	0.052	0.089	1.327	2.267	0.105	2.667	0.019	0.483	0.008	0.193	0.047	1.200
08BL	0805	U S Z	0.040	0.061	1.013	1.547	0.065	0.097	1.641	2.454	0.054	1.360	0.010	0.241	0.014	0.362	0.041	1.040
08UL	0805	U S Z	0.040	0.061	1.013	1.547	0.065	0.097	1.641	2.454	0.054	1.360	0.010	0.241	0.014	0.362	0.041	1.040
11	0505	U S Z E P Q Y M W H V R	0.038	0.074	0.965	1.867	0.043	0.074	1.086	1.867	0.053	1.334	0.014	0.362	0.008	0.193	0.029	0.733
11	0505	T	0.038	0.074	0.965	1.867	0.043	0.084	1.086	2.134	0.053	1.334	0.014	0.362	N/A	N/A	N/A	N/A
17	1111	U S Z E P Q Y M W H V R	0.090	0.131	2.292	3.334	0.095	0.137	2.413	3.467	0.105	2.667	0.038	0.965	0.008	0.193	0.047	1.200
17	1111	T	0.090	0.137	2.292	3.467	0.095	0.152	2.413	3.867	0.105	2.667	0.038	0.965	N/A	N/A	N/A	N/A
18	1111 <sup>(3)</sup>	U Z E W H V	0.090	0.142	2.292	3.600	0.095	0.152	2.413	3.867	0.105	2.667	0.043	1.086	0.008	0.193	0.047	1.200
22	2222	U S Z E P Q Y M W H V R	0.223	0.278	5.671	7.068	0.200	0.252	5.067	6.401	0.137	3.467	0.124	3.137	N/A	N/A	N/A	N/A
40	3838	U S Z E P Q Y M W H V R	0.352	0.410	8.928	10.401	0.352	0.415	8.928	10.535	0.137	3.467	0.276	6.998	N/A	N/A	N/A	N/A

(1) Dimensions listed include the termination.

(2) Band widths are from corner to corner of part.

(3) Enhanced voltage handling case size.

## Chip Selection

Multilayer capacitors (MLC) are categorized by dielectric performance with temperature, or “temperature coefficient”, as these devices vary in behavior over temperature. The choice of component is thus largely determined by the temperature stability required of the device, i.e. type of dielectric, and the size necessary for a given capacitance and voltage rating. The following items are pertinent to chip selection:

## Dielectric Type

**CF:** Ultra stable Class I dielectric exceeds EIA COG requirements with negligible dependence of electrical properties on temperature, voltage, frequency and time, used in circuitry requiring very stable performance.

**AH:** EIA Class 1 dielectric with a dielectric constant that increases with temperature (90ppm/°C). Useful for temperature compensation where other board components may be losing capacitance with temperature.

**NA:** EIA Class 1 dielectric with a negative TCC. Useful in situations where other board components are gaining capacitance with temperature.

**UL:** EIA Stable Class 1 dielectric, with extremely low ESR. Useful in any application where heat generation or signal loss are concerns.

**BL:** EIA Stable Class II dielectric (X7R), with predictable change in properties with temperature, voltage, frequency and time. Used as blocking, de-coupling, bypassing and frequency discriminating elements. This dielectric is ferroelectric, and provides higher capacitance than Class 1.

**MS:** Stable Class 1 dielectric. Particularly suited to high capacitance or high volume applications.

## Capacitor Size

Size selection is based primarily on capacitance value, voltage rating, and resonance frequency. Smaller units are generally less expensive; 0603 is the most economical size. Because mass affects the thermal shock behavior of chips, size selection must consider the soldering method used to attach the chip to the board. C18 and smaller can be wave, vapor phase or reflow soldered. Larger units require reflow soldering.

## Termination Material

Nickel barrier termination, with exceptional solder leach resistance is recommended for all applications involving solder. DLI offers two versions of the nickel barrier termination. The “Z” termination is a nickel barrier with 100% matte tin for a lead free capacitor. The “U” termination is a nickel barrier with 90/10 tin/lead for military applications. Non-magnetic versions of these termination finishes are also available.

## Solder Leaching

DLI’s termination finishes are designed to withstand RoHS attachment methods. During soldering, time above 230°C should be minimized to reduce thinning of the barrier layer and subsequent bond failure. DLI offers enhanced magnetic and non-magnetic termination finishes for applications requiring extended soldering time or repeated reflow cycles. Please consult your Sales Representative when ordering.

## Packaging

Units are available in bulk, reeled or in waffle pack.

## Attachment Methods

Bonding of capacitors to substrates can be categorized into two methods, those involving solder, which are prevalent, and those using other materials, such as epoxies and thermo-compression or ultrasonic bonding with wire. Please see DLI application note “Recommended Solder Attachment Techniques for Multi-Layer Chip and Pre-Thinned Capacitors” located on our website, [www.dilabs.com](http://www.dilabs.com).

## Soldering

Soldering methods commonly used in the industry and recommended are Reflow Soldering, Wave Soldering, and to a lesser extent, Vapor Phase Soldering. All these methods involve thermal cycling of the components and therefore the rate of heating and cooling must be controlled to preclude thermal shocking of the devices. In general, rates which do not exceed 120°C per minute and a temperature spike of 100°C maximum for any soldering process on sizes C18 and smaller is advisable. Other precautions include post soldering handling, primarily avoidance of rapid cooling with contact with heat sinks, such as conveyors or cleaning solutions.

Large chips are more prone to thermal shock as their greater bulk will result in sharper thermal gradients within the device during thermal cycling. Units larger than C18 experience excessive stress if processed through the fast cycles typical of solder wave or vapor phase operations. Solder reflow is most applicable to the larger chips as the rates of heating and cooling can be slowed within safe limits. In general, rates that do not exceed 60°C per minute and a temperature spike of 50°C maximum for any soldering process on sizes larger than C18 is advisable.

Attachment using a soldering iron requires extra care, particularly with large components, as thermal gradients are not easily controlled and may cause cracking of the chip. Precautions include preheating of the assembly to within 100°C of the solder flow temperature, the use of a fine tip iron which does not exceed 30 watts, and limitation of contact of the iron to the circuit pad areas only.

## Bonding

Hybrid assembly using conductive epoxy or wire bonding requires the use of silver palladium or gold terminations. Nickel barrier termination is not practical in these applications, as intermetallics will form between the dissimilar metals. The ESR will increase over time and may eventually break contact when exposed to temperature cycling.

## Cleaning

Chip capacitors can withstand common agents such as water, alcohol and degreaser solvents used for cleaning boards. Ascertain that no flux residues are left on the chip surfaces as these diminish electrical performance.


## DLI Shelf Life

Capacitors are solderable for a maximum of one year from the date of shipment if properly stored in the original packaging. Dry nitrogen storage is preferable for longer periods.

## Board Design Considerations

The amount of solder applied to the chip capacitor will influence the reliability of the device. Excessive solder can create thermal and tensile stresses on the component which could lead to fracturing of the chip or the solder joint itself. Insufficient or uneven solder application can result in weak bonds, rotation of the device off line or lifting of one terminal off the pad (tombstoning). The volume of solder is process and board pad size dependent. WAVE SOLDERING exposes the devices to a large solder volume, hence the pad size area must be restricted to accept an amount of solder which is not detrimental to the chip size utilized. Typically the pad width is 66% of the component width, and the length is .030" (.760 mm) longer than the termination band on the chip. An 0805 chip which is .050" wide and has a .020" termination band therefore requires a pad .033" wide by .050" in length. Opposing pads should be identical in size to preclude uneven solder fillets and mismatched surface tension forces which can misalign the device. It is preferred that the pad layout results in alignment of the long axis of the chips at right angles to the solder wave, to promote even wetting of all terminals. Orientation of components in line with the board travel direction may require dual waves with solder turbulence to preclude cold solder joints on the trailing terminals of the devices, as these are blocked from full exposure to the solder by the body of the capacitor. Restrictions in chip alignment do not apply to SOLDER REFLOW or VAPOR PHASE processes, where the solder volume is controlled by the solder paste deposition on the circuit pads. There are practical limitations on capacitor sizes that prohibit reliable direct mounting of chip capacitors larger than 2225 to a substrate. Without mechanical restriction, thermally induced stresses are released once the capacitor attains a steady state condition, at any given temperature. Capacitors bonded to substrates, however, will retain some stress, due primarily to the mismatch of expansion of the component to the substrate; the residual stress on the chip is also influenced by the ductility and hence the ability of the bonding medium to relieve the stress. Unfortunately, the thermal expansions of chip capacitors differ significantly from those of substrate materials.

## Recommended Printed Wire Board Land Patterns



Printed Wire Board land pattern design for chip components is critical to ensure a reliable solder fillet, and to reduce nuisance type manufacturing problems such as component swimming and tombstoning. The land pattern suggested can be used for reflow and wave solder operations as noted. Land patterns constructed with these dimensions will yield optimized solder fillet formation and thus reduce the possibility of early failure.<sup>1</sup>

$$A = (\text{Max Length}) + 0.030" (.762\text{mm})^*$$

$$B = (\text{Max Width}) + 0.010" (.254\text{mm})^{**}$$

$$C = (\text{Min Length}) - 2 (\text{Nominal Band})^{***}$$

\* Add 0.030" for Wave Solder operations.

\*\* Replace "Max Width" with "Max Thickness" for vertical mounting.

\*\*\* "C" to be no less than 0.02", change "A" to (Max Length) + 0.020". For C04 "C" to be no less than 0.01".



1. Frances Classon, James Root, Martin Marietta Orlando Aerospace, "Electronics Packaging and Interconnection Handbook".

## Temperature Precautions

The rate of heating and cooling must be controlled to preclude thermal cracking of ceramic capacitors. Soldering temperatures should not exceed 200°C per minute, temperature variation must not exceed 100°C maximum for any solder operation. Avoid forced cooling or contact with heat sinks, such as conveyor belts, metal tables or cleaning solutions, before the chips reach ambient temperatures.

## MLC Orientation - Horizontal and Vertical Mounting

The orientation of the MLC relative to the ground plane affects the devices' impedance. When the internal electrodes are parallel to the ground plane (Horizontal mounting) the impedance of the MLC resembles a folded transmission line driven from one end. The below graph shows the modeled insertion loss and parallel resonances of C17AH101K-7UN-X0T with horizontal mounting. When the internal electrodes are perpendicular to the ground plane (Vertical mounting, bottom graph) the MLC impedance resembles a folded transmission line driven from the center reducing resonance effects. C11,17 are available with vertical or horizontal orientation in tape and reel packaging. Modeling can be done in CapCad. HP/EEs of series 4 contains models for C11 and C17 in the element libraries under Dielectric Laboratories MLC.

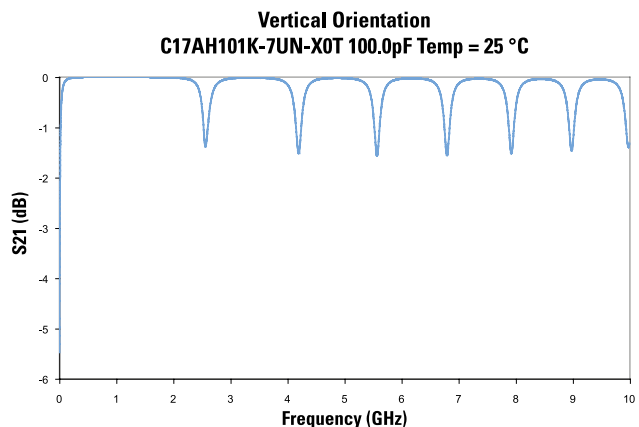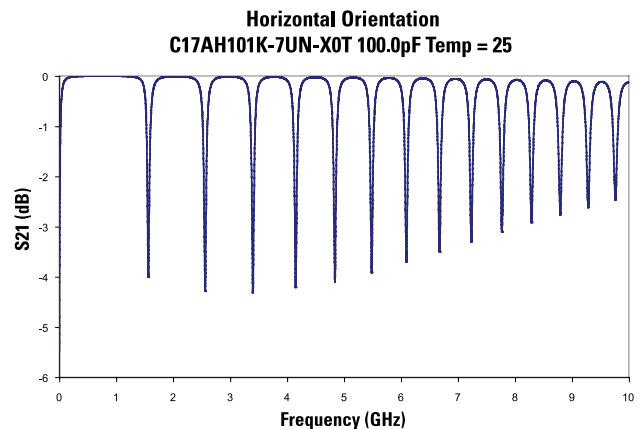

# AH Series: P90 Porcelain Capacitors



Description	Functional Applications	Benefits
Porcelain Capacitors Positive TC "P90" Low ESR, High Q Capacitance Range 0.1 - 5100 pF High Self-resonance Low Noise Established Reliability	Impedance Matching DC Blocking Bypass Coupling Tuning & Feedback Amplifier Matching Networks VCO Frequency Stabilization Filtering, Diplexers & Antenna Matching High RF Power Circuits	Oscillators Timing Circuits Filters RF Power Amplifiers & Delay Lines Stable TC, -55° to +125°C Operating Range High Q SMD Compatibility Lower ESR Power Handling, High Voltage

## Dielectric Characteristics

Dielectric Material Code	Temperature Coefficient (ppm/°C Maximum)	Dissipation Factor (% @ 1MHz Maximum)	Dielectric Withstanding Voltage		Insulation Resistance (MΩ Minimum)		Aging	Piezoelectric Effects	Dielectric Absorption
			Voltage Rating (Volts)	DWV (Volts)	@ +25°C	@ +125°C			
AH	+90 ± 20	0.05	Please see chart (pg. 13)	250% of WVDC for 5 sec unless specified in chart (pg. 13)	10 <sup>6</sup>	10 <sup>5</sup>	None	None	None

## Part Number Breakdown\*

<b>*C</b>	<b>17</b>	<b>AH</b>	<b>620</b>	<b>J</b>	<b>-</b>	<b>7</b>	<b>U</b>	<b>N</b>	<b>-</b>	<b>X</b>	<b>0</b>	<b>T</b>
Multi Layer	Case Size	Material System	Capacitance Code	Tolerance Level	Voltage Code	Termination Code	Leading Code	Test Level	Marking Code	Packaging		

### Available Termination Types

C11	T, U, S, Z, E, P, Q, Y, M, W, H, V, R
C17	T, U, S, Z, E, P, Q, Y, M, W, H, V, R
C18	U, Z, E, Y, W, H
C22	U, S, Z, E, P, Q, Y, M, W, H, V, R
C40	T, U, S, Z, E, P, Q, Y, M, W, H, V, R

### Code Termination System

T	Ag Term, Ni Barrier Layer, Heavy SnPb Plated Solder
U	Ag Termination, Ni Barrier Layer, SnPb Plated Solder
S	Ag Termination, Ni Barrier Layer, Gold Flash, RoHS
Z	Ag Termination, Ni Barrier Layer, Sn Plated Solder, RoHS
E	Ag Termination, Enhanced Ni Barrier, Sn Plated Solder, RoHS
P	AgPd Termination, RoHS
Q	Polymer Termination, Ni Barrier Layer, Sn Plated Solder, RoHS
Y	Polymer Termination, Ni Barrier Layer, SnPb Plated Solder,
M	Polymer Termination, Cu Barrier Layer, Sn Plated Solder, RoHS
W	Ag Termination, Cu Barrier Layer, Sn Plated Solder
H	Ag Termination, Enhanced Cu Barrier, Sn Plated Solder, RoHS
V	Ag Termination, Cu Barrier Layer, SnPb Plated Solder
R	Ag Termination, Cu Barrier Layer, Heavy SnPb Plated Solder

### Available Lead Types

C11	A, B, D
C17	A, B, C, D, E, F
C18	A, B, C, D, E, F
C22	A, B, C, D, E, F
C40	A, B, C, D, E, F

Special Leading requirements available.

### Code Lead Types

A	Axial Ribbon
B	Radial Ribbon
C	Center Ribbon
D	Customer Specified
E	Axial Wire
F	Radial Wire
N	None

### Test Level – All Case Sizes

X	Standard
Y	Reduced Visual
A	MIL-PRF-55681 Group A
C	MIL-PRF-55681 Group C
D	Customer Specified

### Available Laser Marking

C11	0, 1, 2, 5
C17	0, 1, 2, 3, 4, 5
C18	0, 1, 2, 5
C22	0, 1
C40	0, 1

### Code Laser Marking

0	No marking
1	Single-side marked
2	Double-side marked
3	Large single-side marked
4	Large double-side marked
5	Vertical edge marked
9	Customer Specified

### Available Packaging

C11	T, V, W, B, P, S
C17	T, V, W, B, P, S
C18	T, V, W, B, P, S
C22	T, B, P, S
C40	T, B, P, S, R

### Code Packaging

T	Tape & Reel – Horizontal
V	Tape & Reel – Vertical
W	Waffle Pack
B	Bulk
P	Plastic Box
R	Tube (Rail)
S	Customer Specified

\*See page 6 for complete part number system.


## Capacitance and Voltage Table

CAP CODE	CAP (pF)	CASE SIZE C11 0505	CASE SIZE C17 1111	CASE SIZE C18 1111	CASE SIZE C22 2225	CASE SIZE C40 3838
0R1	0.1	250V Code 9 DWV = 625V	1000V Code 7 DWV = 2500V	2000V Code G DWV = 2500V	2500V Code B DWV = 3000V	7200V Code H DWV = 8700V
0R2	0.2					
0R3	0.3					
0R4	0.4					
0R5	0.5					
0R6	0.6					
0R7	0.7					
0R8	0.8					
0R9	0.9					
1R0	1.0					
1R1	1.1					
1R3	1.3					
1R4	1.4					
1R5	1.5					
1R6	1.6					
1R7	1.7					
1R8	1.8					
1R9	1.9					
2R0	2.0					
2R1	2.1					
2R2	2.2					
2R4	2.4					
2R7	2.7					
3R0	3.0					
3R3	3.3					
3R6	3.6					
3R9	3.9					
4R3	4.3					
4R7	4.7					
5R1	5.1					
5R6	5.6					
6R2	6.2					
6R8	6.8					
7R5	7.5					
8R2	8.2					
9R1	9.1					
100	10					
110	11					
120	12					
130	13					
150	15					
160	16					
180	18					
200	20					
220	22					
240	24					
270	27					
300	30					
330	33					
360	36					
390	39					
430	43					
470	47					
510	51					
560	56					
620	62					
680	68					
750	75					
820	82					
910	91					
101	100					
111	110					
121	120					
131	130					
151	150					
161	160					
181	180					
201	200					
221	220					
241	240					
271	270					
301	300					
331	330					
361	360					
391	390					
431	430					
471	470					
511	510					
561	560					
621	620					
681	680					
751	750					
821	820					
911	910					
102	1000					
122	1200					
152	1500					
182	1800					
222	2200					
272	2700					
332	3300					
392	3900					
472	4700					
512	5100					
Reel QTY Horizontal		3500	2350	2350	500	250


Special capacitance values available upon request.

## RF Characteristics


**ESR vs Frequency  
DLI C11 AH Series**

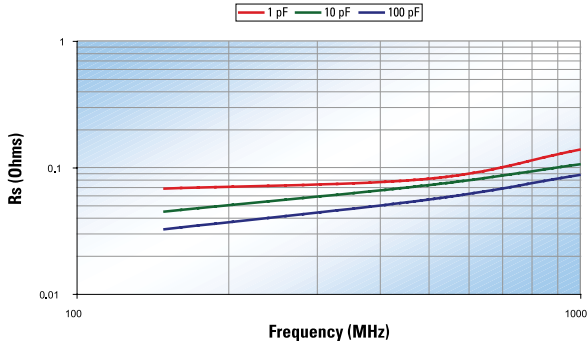


**Q vs Capacitance  
DLI C11 AH Series**

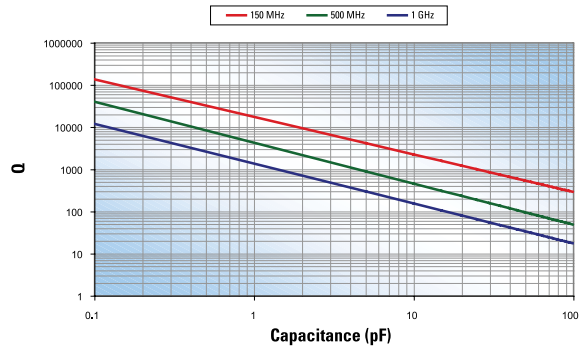


**ESR vs Frequency  
DLI C17 AH Series**

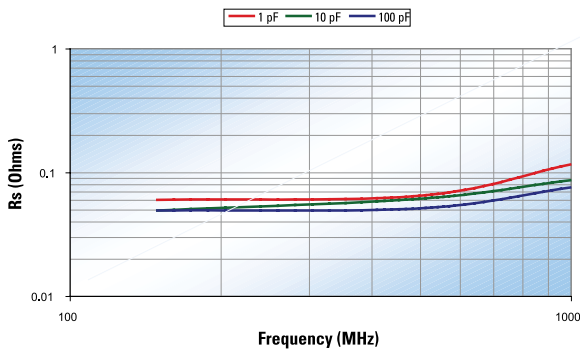


**Q vs Capacitance  
DLI C17 AH Series**

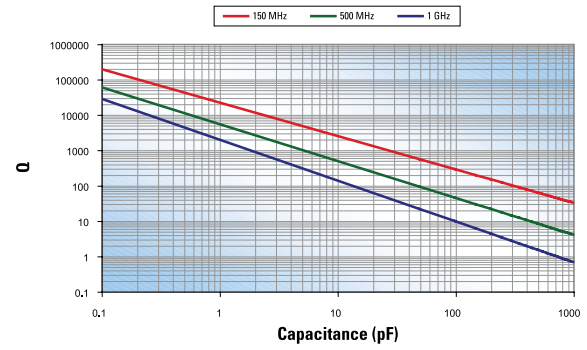


**ESR vs Frequency  
DLI C18 AH Series**

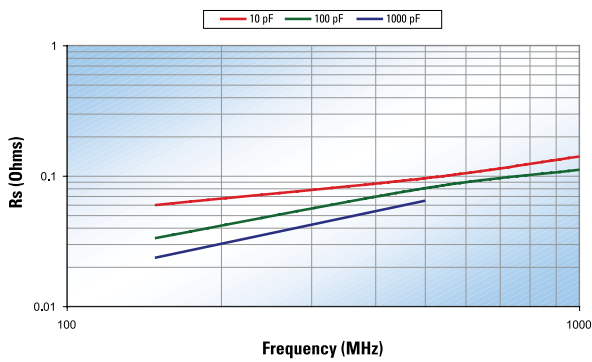


**Q vs Capacitance  
DLI C18 AH Series**

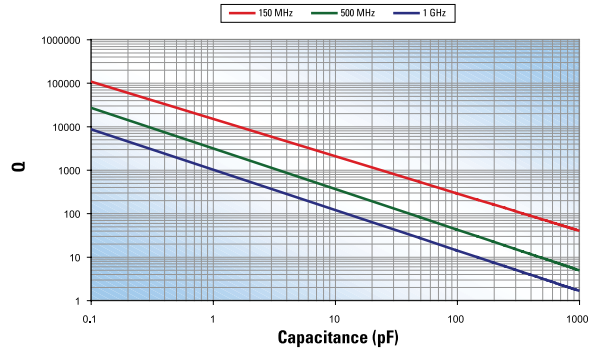

**ESR vs Frequency  
DLI C22 AH Series**

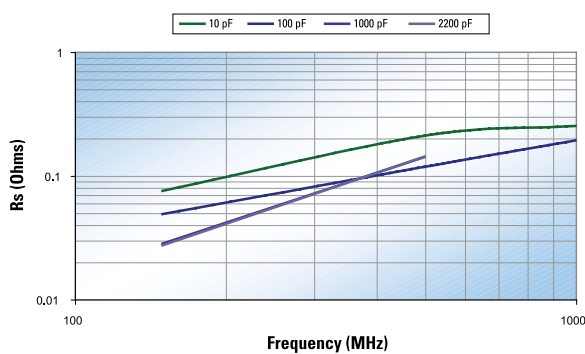

**Q vs Capacitance  
DLI C22 AH Series**

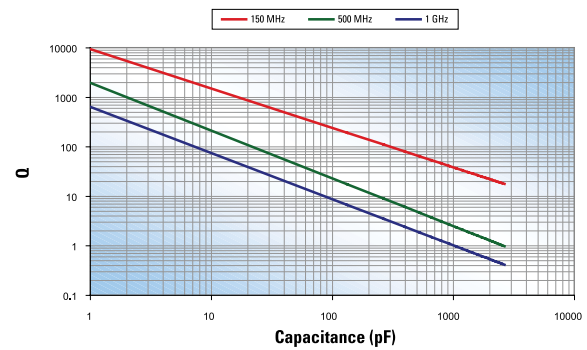


The information above represents typical device performance.




## RF Characteristics


**ESR vs Frequency**  
DLI C40 AH Series

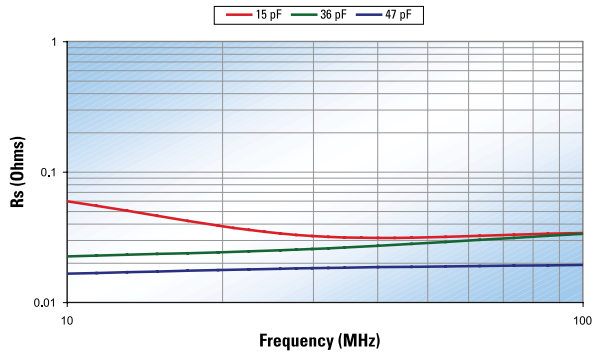


**Q vs Capacitance**  
DLI C40 AH Series

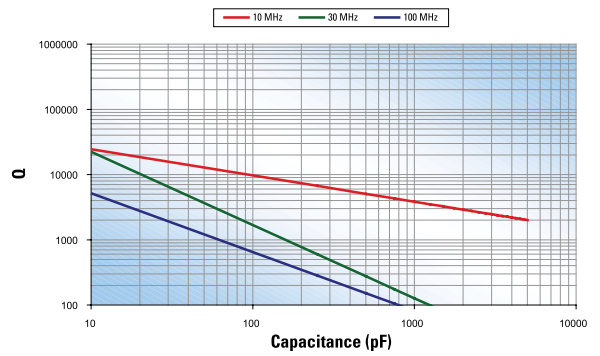


**Resonant Frequency vs Capacitance**  
DLI C11 AH Series

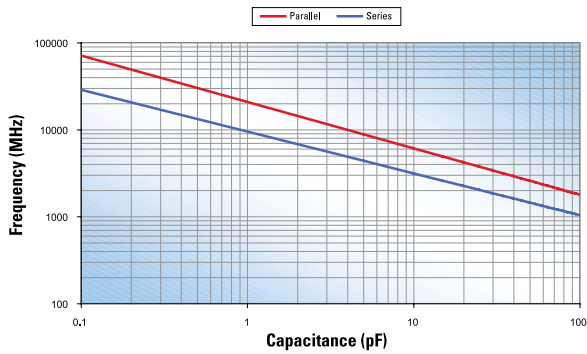

**Current Rating vs. Capacitance,**  
(infinite heat sink, 25°C ambient temperature)  
DLI C17AH Series

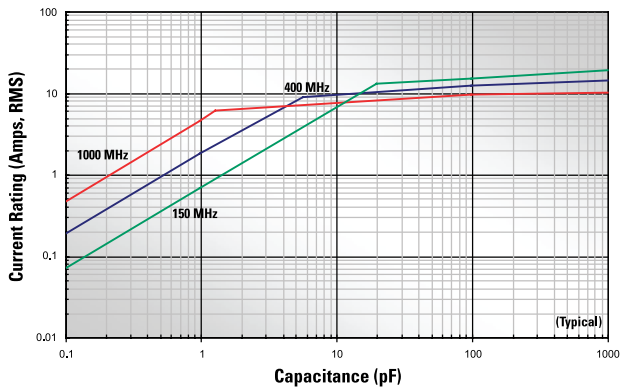


**First Resonance Frequency vs Capacitance**  
DLI C17AH Series

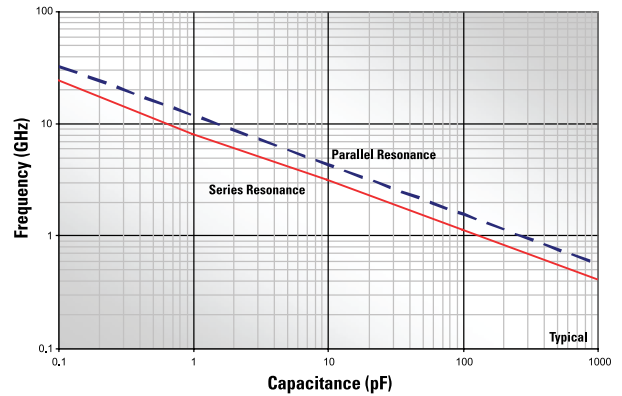

The information above represents typical device performance.

# CF Series: Ultrastable Porcelain Capacitors

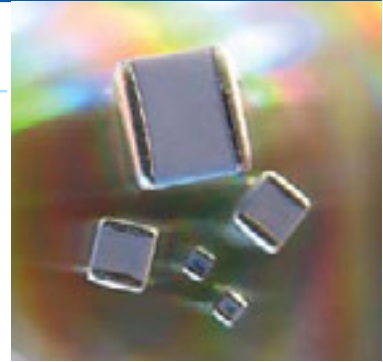

Description	Functional Applications	Benefits
Porcelain Capacitors Ultra Temperature Stable Low ESR, High Q Capacitance Range 0.1 - 5100 pF High Self-resonance Low Noise Established Reliability	Impedance Matching DC Blocking Bypass Coupling Tuning & Feedback Amplifier Matching Networks VCO Frequency Stabilization Filtering, Diplexers & Antenna Matching High RF Power Circuits	Oscillators Timing Circuits Filters RF Power Amplifiers & Delay Lines Stable TC, -55° to +125°C Operating Range High Q SMD Compatibility Lower ESR Power Handling, High Voltage

## Dielectric Characteristics

Dielectric Material Code	Temperature Coefficient (ppm/°C Maximum)	Dissipation Factor (% @ 1MHz Maximum)	Dielectric Withstanding Voltage		Insulation Resistance (MΩ Minimum)		Aging	Piezoelectric Effects	Dielectric Absorption
			Voltage Rating (Volts)	DWV (Volts)	@ +25°C	@ +125°C			
CF	0 ± 15	0.05	Please see chart (pg. 17)	250% of WVDC for 5 sec unless specified in chart (pg. 17)	10 <sup>6</sup>	10 <sup>5</sup>	None	None	None

## Part Number Breakdown\*

<b>*C</b>	<b>17</b>	<b>CF</b>	<b>620</b>	<b>J</b>	<b>-</b>	<b>7</b>	<b>U</b>	<b>N</b>	<b>-</b>	<b>X</b>	<b>0</b>	<b>T</b>
Multi Layer	Case Size	Material System	Capacitance Code	Tolerance Level	Voltage Code	Termination Code	Leading Code	Test Level	Marking Code	Packaging		

### Available Termination Types

C06	U, S, Z, E, P, Q, Y, W, H, V, R
C11	T, U, S, Z, E, P, Q, Y, W, H, V, R
C17	T, U, S, Z, E, P, Q, Y, W, H, V, R
C18	U, Q, Y, V, W, H, Z
C22	U, S, Z, E, P, Q, Y, W, H, V, R
C40	T, U, S, P, Q, Y, W, H, V, R,

### Code Termination System

T	Ag Term, Ni Barrier Layer, Heavy SnPb Plated Solder
U	Ag Termination, Ni Barrier Layer, SnPb Plated Solder
S	Ag Termination, Ni Barrier Layer, Gold Flash, RoHS
Z	Ag Termination, Ni Barrier Layer, Sn Plated Solder, RoHS
E	Ag Termination, Enhanced Ni Barrier, Sn Plated Solder, RoHS
P	AgPd Termination, RoHS
Q	Polymer Termination, Ni Barrier Layer, Sn Plated Solder, RoHS
Y	Polymer Termination, Ni Barrier Layer, SnPb Plated Solder,
M	Polymer Termination, Cu Barrier Layer, Sn Plated Solder, RoHS
W	Ag Termination, Cu Barrier Layer, Sn Plated Solder
H	Ag Termination, Enhanced Cu Barrier, Sn Plated Solder, RoHS
V	Ag Termination, Cu Barrier Layer, SnPb Plated Solder
R	Ag Termination, Cu Barrier Layer, Heavy SnPb Plated Solder

### Available Lead Types

C06	N/A
C11	A, B, D
C17	A, B, C, D, E, F
C18	A, B, C, D, E, F
C22	A, B, C, D, E, F
C40	A, B, C, D, E, F

Special Leading requirements available.

### Code Lead Types

A	Axial Ribbon
B	Radial Ribbon
C	Center Ribbon
D	Customer Specified
E	Axial Wire
F	Radial Wire
N	None

### Test Level – All Case Sizes

X	Standard
Y	Reduced Visual
A	MIL-PRF-55681 Group A
C	MIL-PRF-55681 Group C
D	Customer Specified

### Available Laser Marking

C06	0, 1
C11	0, 1, 2, 5
C17	0, 1, 2, 3, 4, 5
C18	0, 1, 2, 5
C22	0, 1
C40	0, 1

### Code Laser Marking

0	No marking
1	Single-side marked
2	Double-side marked
3	Large single-side marked
4	Large double-side marked
5	Vertical edge marked
9	Customer Specified

### Available Packaging

C06	T, W, B, S
C11	T, V, W, B, P, S
C17	T, V, W, B, P, S
C18	T, V, W, B, P, S
C22	T, B, P, S
C40	T, B, P, S, R

### Code Packaging

T	Tape & Reel – Horizontal
V	Tape & Reel – Vertical
W	Waffle Pack
B	Bulk
P	Plastic Box
R	Tube (Rail)
S	Customer Specified

\*See page 6 for complete part number system.


## Capacitance and Voltage Table

CAP CODE	CAP (pF)	CASE SIZE C06 0603	CASE SIZE C11 0505	CASE SIZE C17 1111	CASE SIZE C18 1111	CASE SIZE C22 2225	CASE SIZE C40 3838
0R1	0.1	250V Code 9	250V Code 9	1000V Code 7	2000V Code G 1000V Code 7	2500V Code B DWV = 3000V	7200V Code H DWV = 8700V
0R2	0.2						
0R3	0.3						
0R4	0.4						
0R5	0.5						
0R6	0.6						
0R7	0.7						
0R8	0.8						
0R9	0.9						
1R0	1.0						
1R1	1.1						
1R2	1.2						
1R3	1.3						
1R4	1.4						
1R5	1.5						
1R6	1.6						
1R7	1.7						
1R8	1.8						
1R9	1.9						
2R0	2.0						
2R1	2.1						
2R2	2.2						
2R4	2.4						
2R7	2.7						
3R0	3.0						
3R3	3.3						
3R6	3.6						
3R9	3.9						
4R3	4.3						
4R7	4.7						
5R1	5.1						
5R6	5.6						
6R2	6.2						
6R8	6.8						
7R5	7.5						
8R2	8.2						
9R1	9.1						
100	10						
110	11						
120	12						
130	13						
150	15						
160	16						
180	18						
200	20						
220	22						
240	24						
270	27						
300	30						
330	33						
360	36						
390	39						
430	43						
470	47						
510	51						
560	56						
620	62						
680	68						
750	75						
820	82						
910	91						
101	100						
111	110						
121	120						
131	130						
151	150						
161	160						
181	180						
201	200						
221	220						
241	240						
271	270						
301	300						
331	330						
361	360						
391	390						
431	430						
471	470						
511	510						
561	560						
621	620						
681	680						
751	750						
821	720						
911	910						
102	1000						
122	1200						
152	1500						
182	1800						
222	2200						
272	2700						
332	3300						
392	3900						
472	4700						
512	5100						
Reel QTY		4000	3500	2350	2350	500	250


Special capacitance values available upon request.

## RF Characteristics


**ESR vs Frequency**  
**DLI C06 CF Series**

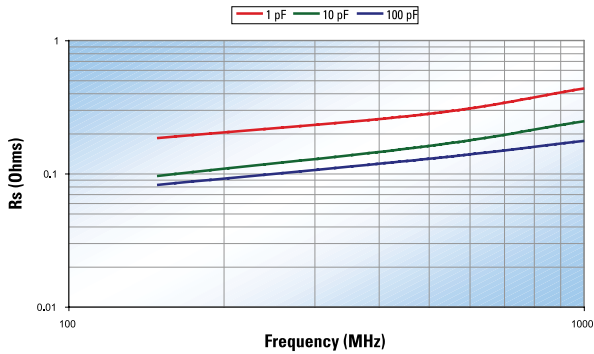


**Q vs Capacitance**  
**DLI C06 CF Series**

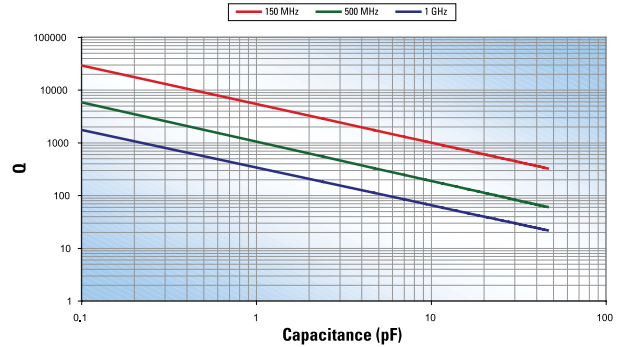


**ESR vs Frequency**  
**DLI C11 CF Series**

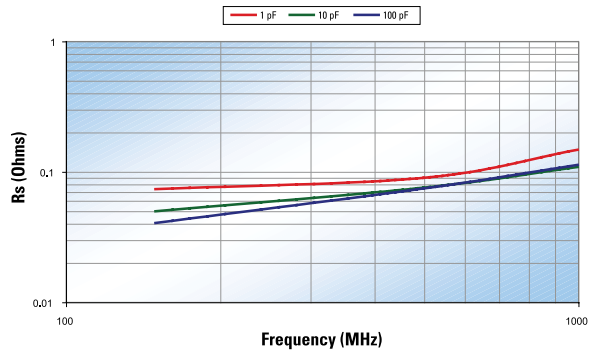


**Q vs Capacitance**  
**DLI C11 CF Series**

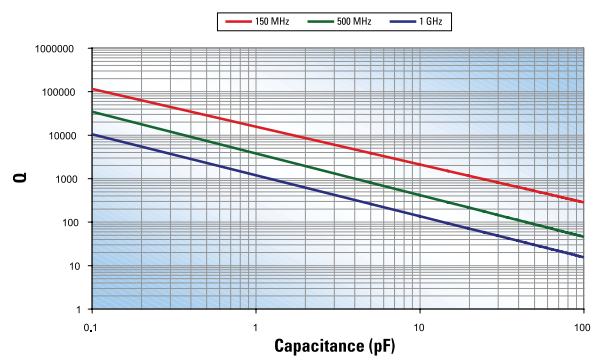


**ESR vs Frequency**  
**DLI C17 CF Series**

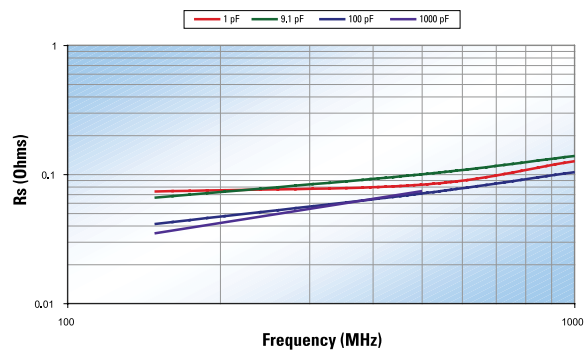


**Q vs Capacitance**  
**DLI C17 CF Series**

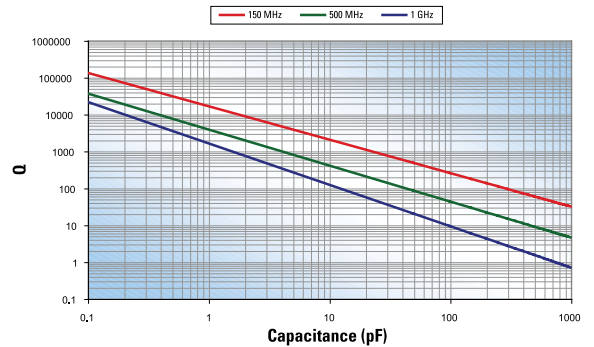

**ESR vs Frequency**  
**DLI C18 CF Series**

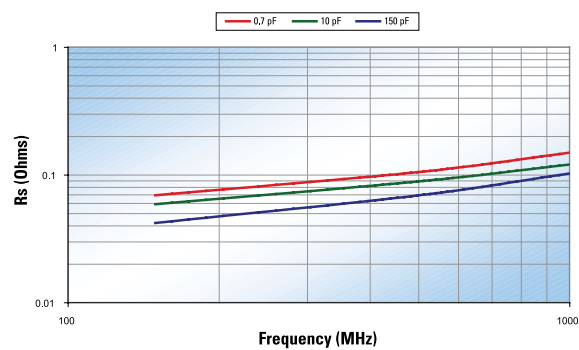


**Q vs Capacitance**  
**DLI C18 CF Series**

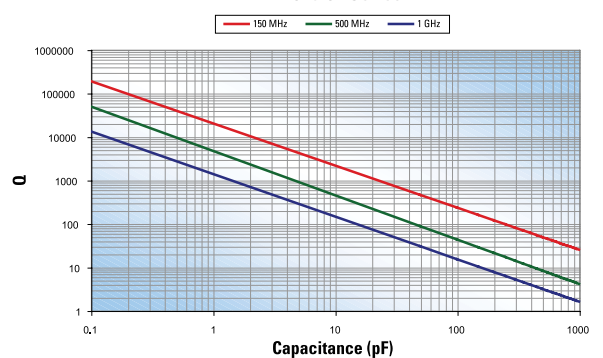


The information above represents typical device performance.

## RF Characteristics


**ESR vs Frequency**  
DLI C22 CF Series

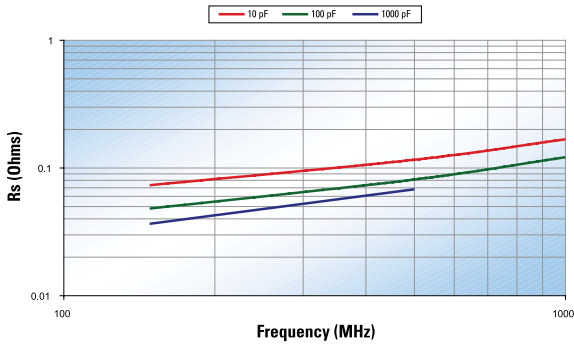


**Q vs Capacitance**  
DLI C22 CF Series

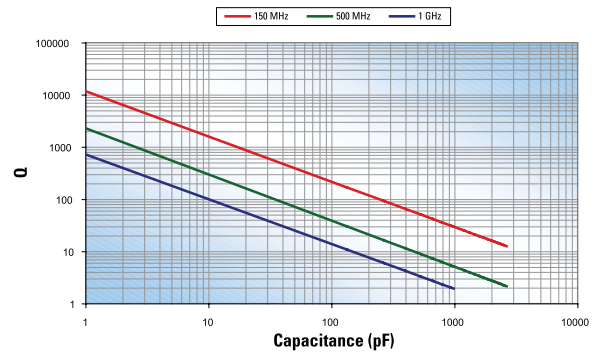


**Resonant Frequency vs Capacitance**  
DLI C06 CF Series

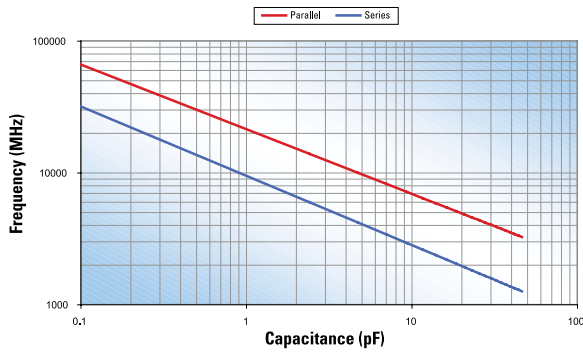


**Resonant Frequency vs Capacitance**  
DLI C11 CF Series

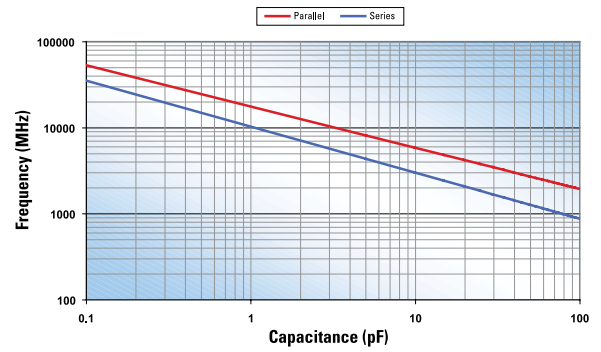

**Current Rating vs. Capacitance,**  
(infinite heat sink, 25°C ambient temperature)  
DLI C17CF Series

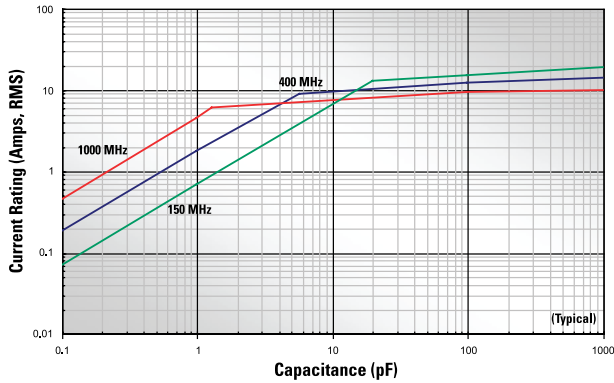

**DLI C22CF Series Current Rating vs. Capacitance,**  
(infinite heat sink, 25°C ambient temperature)

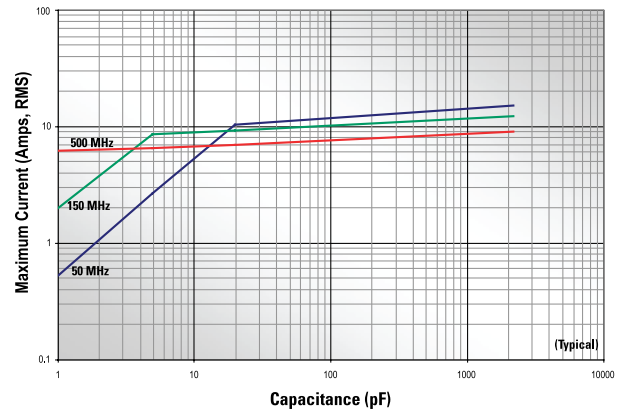

The information above represents typical device performance.

# MS Series: Low ESR, High Volume Ceramic Capacitors

Description	Functional Applications	Benefits
Ceramic Capacitors NPO Low ESR, High Q Capacitance Range 0.2 - 2200 pF High Working Voltage Low Noise	DC Blocking Amplifier Matching Networks VCO Frequency Stabilization Filtering, Diplexers & Antenna Matching High RF Power Circuits Bypass Coupling Tuning & Feedback Broadcast Power Amps	High Q Stable TC, -55° to +125°C Operating Range EIA 0603 & 0805 Case Size SMD Compatibility Oscillators Timing Circuits Filters RF Power Amplifiers & Delay Lines Ultra Low ESR Ceramic Dielectric High Volume Applications



## Dielectric Characteristics

Dielectric Material Code	Temperature Coefficient (ppm/°C Maximum)	Dissipation Factor (% @ 1MHz Maximum)	Dielectric Withstanding Voltage		Insulation Resistance (MΩ Minimum)		Aging	Piezoelectric Effects	Dielectric Absorption
			Voltage Rating (Volts)	DWV (Volts)	@ +25°C	@ +125°C			
MS	0 ± 30	0.05	Please see chart (pg. 21)	250% of WVDC for 5 sec unless specified in chart (pg. 21)	10 <sup>6</sup>	10 <sup>4</sup>	None	None	None

## Part Number Breakdown\*

C	06	MS	101	J -	5	Z	N -	X	0	T																																																																													
Multi Layer	Case Size	Material System	Capacitance Code	Tolerance Level	Voltage Code	Termination Code	Leading Code	Test Level	Marking Code	Packaging																																																																													
<table border="1"> <thead> <tr> <th>Available Termination Types</th> <th>Code</th> <th>Lead Types</th> <th>Test Level – All Case Sizes</th> <th>Code</th> <th>Laser Marking</th> <th>Available Packaging</th> </tr> </thead> <tbody> <tr> <td>C04</td> <td>Z</td> <td>N</td> <td>None</td> <td>X</td> <td>Standard</td> <td>C06 T, B</td> </tr> <tr> <td>C06</td> <td>Z</td> <td></td> <td></td> <td>Y</td> <td>Reduced Visual</td> <td>C08 T, B</td> </tr> <tr> <td>C08</td> <td>Z</td> <td></td> <td></td> <td>D</td> <td>Customer Specified</td> <td>C10 T, B</td> </tr> <tr> <td>C10</td> <td>Z</td> <td></td> <td></td> <td></td> <td></td> <td>C11 T, B</td> </tr> <tr> <td>C11</td> <td>Z</td> <td></td> <td></td> <td></td> <td></td> <td>C12 T, B</td> </tr> <tr> <td>C12</td> <td>Z</td> <td></td> <td></td> <td></td> <td></td> <td>C17 T, B</td> </tr> <tr> <td>C17</td> <td>Z</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>C20</td> <td>Z</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>C22</td> <td>Z</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>C36</td> <td>Z</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>											Available Termination Types	Code	Lead Types	Test Level – All Case Sizes	Code	Laser Marking	Available Packaging	C04	Z	N	None	X	Standard	C06 T, B	C06	Z			Y	Reduced Visual	C08 T, B	C08	Z			D	Customer Specified	C10 T, B	C10	Z					C11 T, B	C11	Z					C12 T, B	C12	Z					C17 T, B	C17	Z						C20	Z						C22	Z						C36	Z					
Available Termination Types	Code	Lead Types	Test Level – All Case Sizes	Code	Laser Marking	Available Packaging																																																																																	
C04	Z	N	None	X	Standard	C06 T, B																																																																																	
C06	Z			Y	Reduced Visual	C08 T, B																																																																																	
C08	Z			D	Customer Specified	C10 T, B																																																																																	
C10	Z					C11 T, B																																																																																	
C11	Z					C12 T, B																																																																																	
C12	Z					C17 T, B																																																																																	
C17	Z																																																																																						
C20	Z																																																																																						
C22	Z																																																																																						
C36	Z																																																																																						
<table border="1"> <thead> <tr> <th>Code</th> <th>Termination System</th> <th>Code</th> <th>Packaging</th> </tr> </thead> <tbody> <tr> <td>Z</td> <td>Ag Termination, Ni Barrier Layer, Sn Plated Solder, RoHS</td> <td>T</td> <td>Tape &amp; Reel – Horizontal</td> </tr> <tr> <td></td> <td></td> <td>B</td> <td>Bulk</td> </tr> </tbody> </table>											Code	Termination System	Code	Packaging	Z	Ag Termination, Ni Barrier Layer, Sn Plated Solder, RoHS	T	Tape & Reel – Horizontal			B	Bulk																																																																	
Code	Termination System	Code	Packaging																																																																																				
Z	Ag Termination, Ni Barrier Layer, Sn Plated Solder, RoHS	T	Tape & Reel – Horizontal																																																																																				
		B	Bulk																																																																																				

\*See page 6 for complete part number system.

## Capacitance and Voltage Table

CAP CODE	CAP (pF)	CASE SIZE C06 0603	CASE SIZE C11 0505	CASE SIZE C17 1111	CASE SIZE C22 2225	CASE SIZE 36 3640
0R1	0.1	50V Code 5	250V Code 9	Code 7 1000V	2000V Code G	2500V Code B
0R2	0.2					
0R3	0.3					
0R4	0.4					
0R5	0.5					
0R6	0.6					
0R7	0.7					
0R8	0.8					
0R9	0.9					
1R0	1.0					
1R1	1.1					
1R2	1.2					
1R3	1.3					
1R4	1.4					
1R5	1.5					
1R6	1.6					
1R7	1.7					
1R8	1.8					
1R9	1.9					
2R0	2.0					
2R1	2.1					
2R2	2.2					
2R3	2.3					
2R4	2.4					
2R5	2.5					
2R6	2.6					
2R7	2.7					
2R8	2.8					
2R9	2.9					
3R0	3.0					
3R3	3.3					
3R6	3.6					
6R9	6.9					
4R3	4.3					
4R7	4.7					
5R1	5.1					
5R6	5.6					
6R2	6.2					
6R8	6.8					
7R5	7.5					
8R2	8.2					
9R1	9.1					
100	10					
110	11					
120	12					
130	13					
150	15					
160	16					
180	18					
200	20					
220	22					
240	24					
270	27					
300	30					
330	33					
360	36					
390	39					
430	43					
470	47					
510	51					
560	56					
620	62					
680	68					
750	75					
820	82					
910	91					
101	100					
111	110					
121	120					
151	150					
181	180					
221	220					
271	270					
331	330					
391	390					
471	470					
511	510					
561	560					
621	620					
681	680					


Table above represents common product line. Additional available products included in table below.

Case Style	Electrical Capacitance (pf)										
	0402	0603	0505	0805	1206	1111/1210	1812	2220	2225	3640	
Volts (V)	50/63	0.1 - 33	0.1 - 220	0.2 - 330	0.2 - 680	0.5 - 2,200					
	100	0.1 - 22	0.1 - 150	0.2 - 220	0.2 - 470	0.5 - 1,500	0.3 - 3,300	1.0 - 6,800	2.0 - 15,000	2.0 - 18,000	
	150	0.1 - 15	0.1 - 120	0.2 - 180	0.2 - 390	0.5 - 1,200	0.3 - 2,700	1.0 - 4,700	2.0 - 12,000	2.0 - 15,000	
	200/250		0.1 - 100	0.2 - 150	0.2 - 330	0.5 - 1,000	0.3 - 2,200	1.0 - 3,900	2.0 - 10,000	2.0 - 10,000	
	300		0.1 - 56	0.2 - 100	0.2 - 220	0.5 - 680	0.3 - 1,500	1.0 - 3,300	2.0 - 6,800	2.0 - 8,200	
	500				0.2 - 100	0.5 - 330	0.3 - 820	1.0 - 2,200	2.0 - 4,700	2.0 - 5,600	4.0 - 15,000
	630					0.5 - 150	0.3 - 390	1.0 - 1,000	2.0 - 2,200	2.0 - 3,300	4.0 - 6,800
	1000					0.5 - 82	0.3 - 220	1.0 - 680	2.0 - 1,500	2.0 - 2,200	4.0 - 4,700
	2000					0.5 - 18	0.3 - 68	1.0 - 150	2.0 - 470	2.0 - 560	4.0 - 1,500
	3000							1.0 - 68	2.0 - 150	2.0 - 150	4.0 - 470


Capacitance values are available in E24 series values. Other values may be available on request, consult factory for details.

## RF Characteristics


**ESR vs Frequency**  
**DLI C06 MS Series**

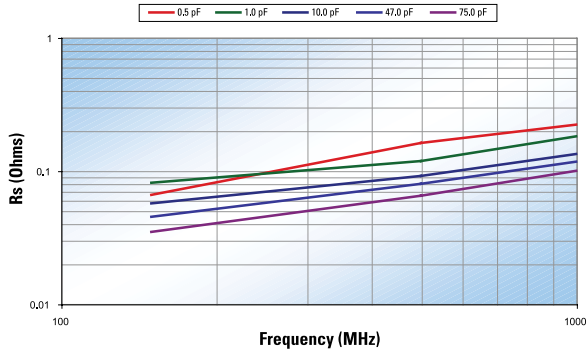


**Q vs Capacitance**  
**DLI C06 MS Series**

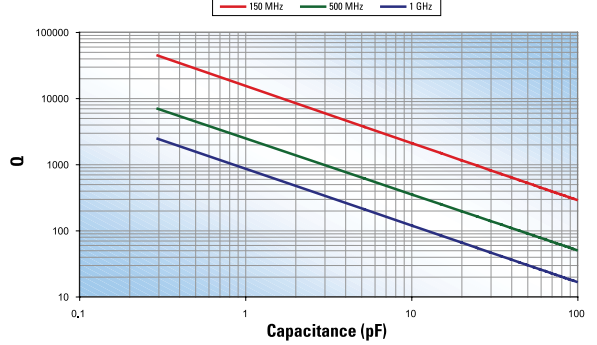


**ESR vs Frequency**  
**DLI C08 MS Series**

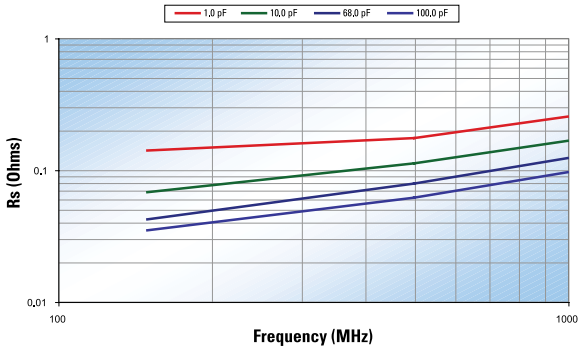


**Q vs Capacitance**  
**DLI C08 MS Series**

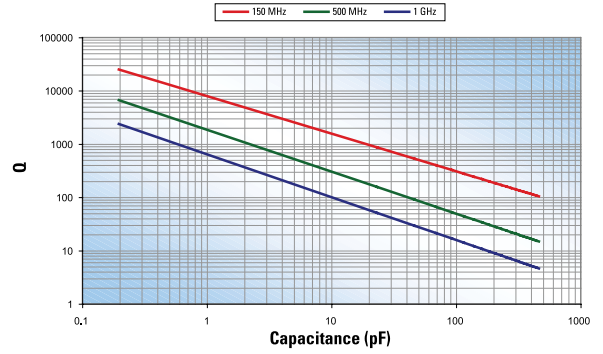


**ESR vs Frequency**  
**DLI C10 MS Series**

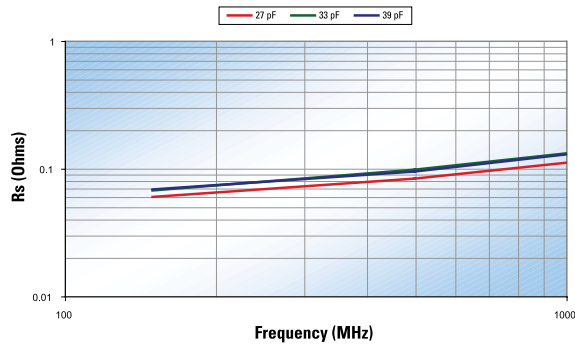


**Q vs Capacitance**  
**DLI C10 MS Series**

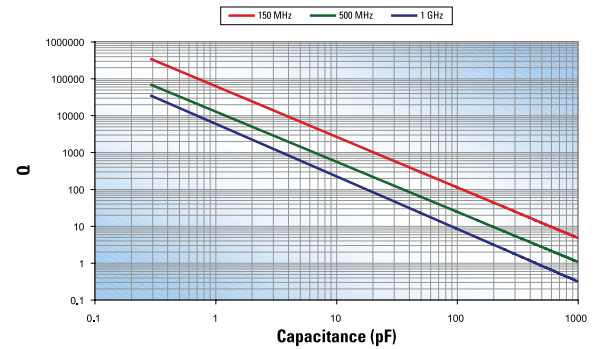

**ESR vs Frequency**  
**DLI C11 MS Series**

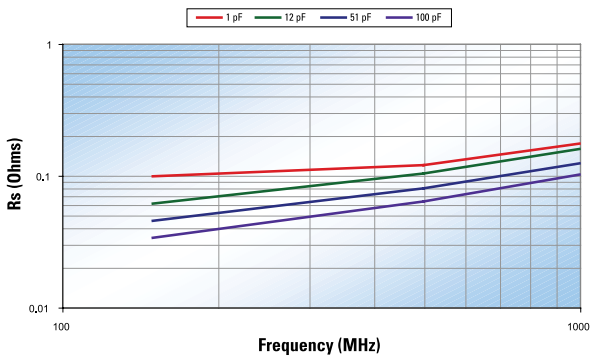


**Q vs Capacitance**  
**DLI C11 MS Series**

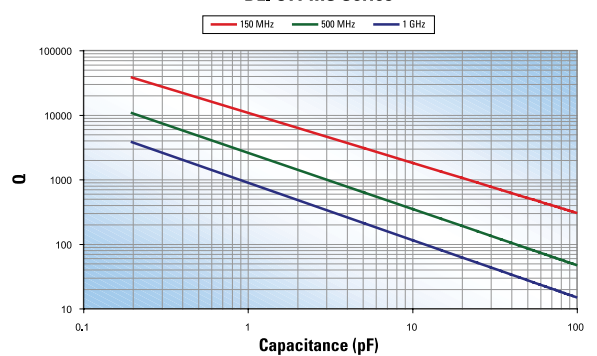


The information above represents typical device performance.




**ESR vs Frequency  
DLI C12 MS Series**

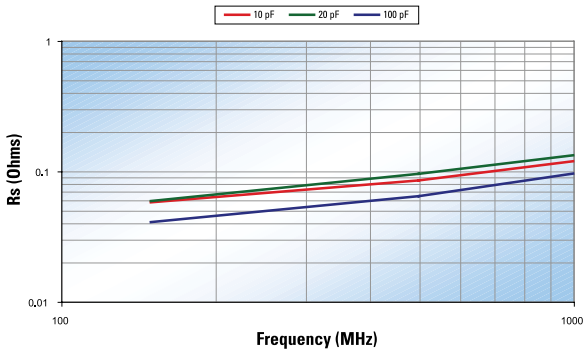


**Q vs Capacitance  
DLI C12 MS Series**

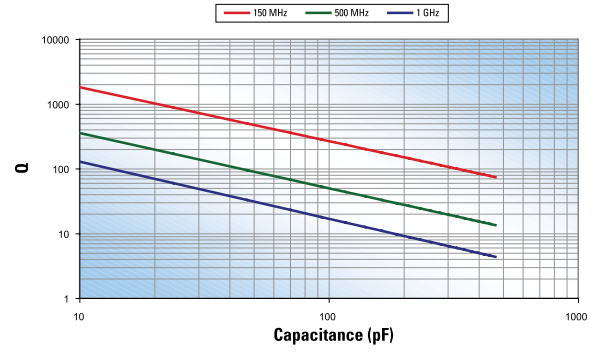


**ESR vs Frequency  
DLI C17 MS Series**

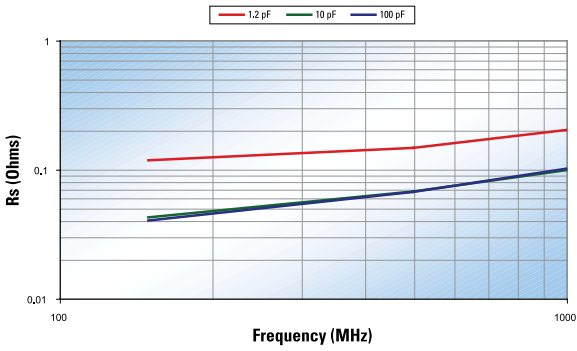


**Q vs Capacitance  
DLI C17 MS Series**

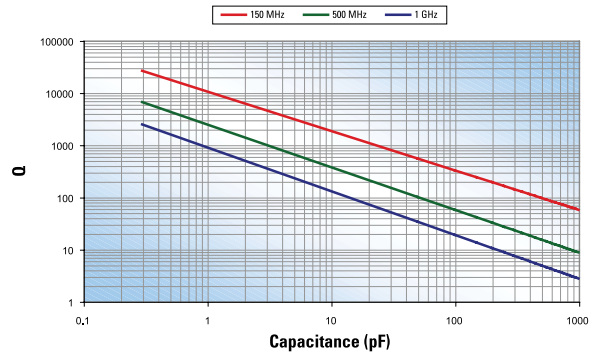


**Resonant Frequency vs Capacitance  
DLI C06 MS Series**

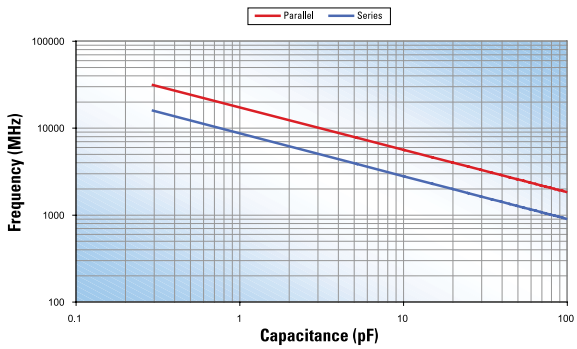


**Resonant Frequency vs Capacitance  
DLI C08 MS Series**

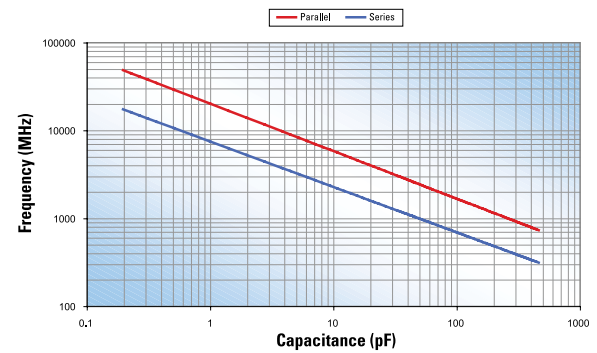

**Resonant Frequency vs Capacitance  
DLI C10 MS Series**

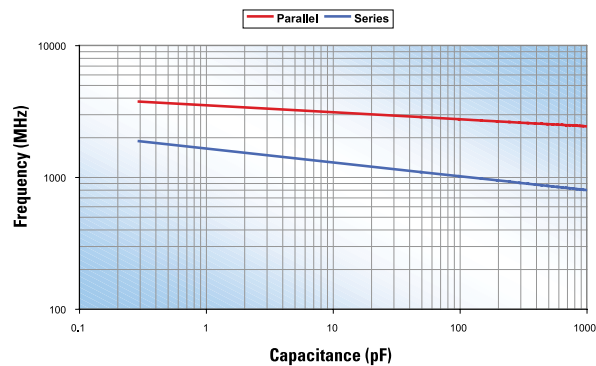

**Resonant Frequency vs Capacitance  
DLI C17 MS Series**

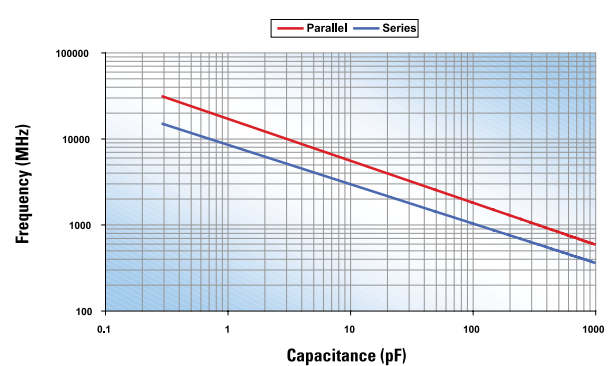

The information above represents typical device performance.

# NA Series: N30 Porcelain Capacitors



Description	Functional Applications	Benefits
Porcelain Capacitors NPO N30 ± 15 Low ESR, High Q Capacitance Range 0.1 - 1000 pF High Self-resonance Low Noise Established Reliability	Impedance Matching DC Blocking Bypass Coupling Tuning & Feedback Amplifier Matching Networks VCO Frequency Stabilization Filtering, Diplexers & Antenna Matching High RF Power Circuits	Oscillators Timing Circuits Filters RF Power Amplifiers & Delay Lines Stable TC, -55° to +125°C Operating Range High Q SMD Compatibility Lower ESR Power Handling, High Voltage

## Dielectric Characteristics

Dielectric Material Code	Temperature Coefficient (ppm/°C Maximum)	Dissipation Factor (% @ 1MHz Maximum)	Dielectric Withstanding Voltage		Insulation Resistance (MΩ Minimum)		Aging	Piezoelectric Effects	Dielectric Absorption
			Voltage Rating (Volts)	DWV (Volts)	@ +25°C	@ +125°C			
NA	+30 ± 15	0.05	Please see chart (pg. 25)	250% of WVDC for 5 sec unless specified in chart (pg. 25)	10 <sup>6</sup>	10 <sup>5</sup>	None	None	None

## Part Number Breakdown\*

<b>*C</b>	<b>17</b>	<b>NA</b>	<b>620</b>	<b>J</b>	<b>-</b>	<b>7</b>	<b>U</b>	<b>N</b>	<b>-</b>	<b>X</b>	<b>0</b>	<b>T</b>
Multi Layer	Case Size	Material System	Capacitance Code	Tolerance Level	Voltage Code	Termination Code	Leading Code	Test Level	Marking Code	Packaging		

### Available Termination Types

C11	T, U, S, Z, E, H
C17	T, U, S, Z, E, H

### Code Termination System

T	Ag Term, Ni Barrier Layer, Heavy SnPb Plated Solder
U	Ag Termination, Ni Barrier Layer, SnPb Plated Solder
S	Ag Termination, Ni Barrier Layer, Gold Flash, RoHS
Z	Ag Termination, Ni Barrier Layer, Sn Plated Solder, RoHS
E	Ag Termination, Enhanced Ni Barrier, Sn Plated Solder, RoHS

### Available Lead Types

C11	A, B, D
C17	A, B, C, D, E, F

Special Leading requirements available.

### Code Lead Types

A	Axial Ribbon
B	Radial Ribbon
C	Center Ribbon
D	Customer Specified
E	Axial Wire
F	Radial Wire
N	None

### Test Level – All Case Sizes

X	Standard
Y	Reduced Visual
A	MIL-PRF-55681 Group A
C	MIL-PRF-55681 Group C
D	Customer Specified

### Available Laser Marking

C11	0, 1, 2, 5
C17	0, 1, 2, 3, 4, 5

### Code Laser Marking

0	No marking
1	Single-side marked
2	Double-side marked
3	Large single-side marked
4	Large double-side marked
5	Vertical edge marked
9	Customer Specified

### Available Packaging

C11	T, V, W, B, P, S
C17	T, V, W, B, P, S

### Code Packaging

T	Tape & Reel – Horizontal
V	Tape & Reel – Vertical
W	Waffle Pack
B	Bulk
P	Plastic Box
S	Customer Specified

\*See page 6 for complete part number system.

## Capacitance and Voltage Table

CAP CODE	CAP (pF)	CASE SIZE C11 0505	CASE SIZE C17 1111
0R1	0.1	150V Code 8 DWV = 375V	1000V Code 7 DWV = 2500V
0R2	0.2		
0R3	0.3		
0R4	0.4		
0R5	0.5		
0R6	0.6		
0R7	0.7		
0R8	0.8		
0R9	0.9		
1R0	1.0		
1R1	1.1		
1R3	1.3		
1R4	1.4		
1R5	1.5		
1R6	1.6		
1R7	1.7		
1R8	1.8		
1R9	1.9		
2R0	2.0		
2R1	2.1		
2R2	2.2		
2R4	2.4		
2R7	2.7		
3R0	3.0		
3R3	3.3		
3R6	3.6		
3R9	3.9		
4R3	4.3		
4R7	4.7		
5R1	5.1		
5R6	5.6		
6R2	6.2		
6R8	6.8		
7R5	7.5		
8R2	8.2		
9R1	9.1		
100	10		
110	11		
120	12		
130	13		
150	15		
160	16		
180	18		
200	20		
220	22		
240	24		
270	27		
300	30		
330	33		
360	36		
390	39		
430	43		
470	47		
510	51		
560	56		
620	62		
680	68		
750	75		
820	82		
910	91		
101	100		
111	110		
121	120		
131	130		
151	150		
161	160		
181	180		
201	200		
221	220		
241	240		
271	270		
301	300		
331	330		
361	360		
391	390		
431	430		
471	470		
511	510		
561	560		
621	620		
681	680		
751	750		
821	820		
911	910		
102	1000		
122	1200		
152	1500		
182	1800		
222	2200		
272	2700		
332	3300		
392	3900		
472	4700		
512	5100		
Reel QTY Horizontal		3500	2350

Special capacitance values available upon request.

# UL Series: Ultra Low ESR Ceramic Capacitors

Description	Functional Applications	Benefits
Ceramic Capacitors NPO Low ESR, High Q Capacitance Range 0.2 - 2200 pF High Working Voltage Low Noise	DC Blocking Amplifier Matching Networks VCO Frequency Stabilization Filtering, Diplexers & Antenna High RF Power Circuits Bypass Coupling Tuning & Feedback Broadcast Power Amps	High Q Stable TC, -55° to +125°C Operating Range EIA 0603 & 0805 Case Size SMD Compatibility Oscillators Timing Circuits Filters RF Power Amplifiers & Delay Lines Ultra Low ESR



## Dielectric Characteristics

Dielectric Material Code	Temperature Coefficient (ppm/°C Maximum)	Dissipation Factor (% @ 1MHz Maximum)	Dielectric Withstanding Voltage		Insulation Resistance (MΩ Minimum)		Aging	Piezoelectric Effects	Dielectric Absorption
			Voltage Rating (Volts)	DWV (Volts)	@ +25°C	@ +125°C			
UL	0 ± 30	0.05	Please see chart (pg. 25)	250% of WVDC for 5 sec unless specified in chart (pg. 25)	10 <sup>5</sup>	10 <sup>4</sup>	None	None	None

## Part Number Breakdown\*

<b>C</b>	<b>17</b>	<b>UL</b>	<b>620</b>	<b>J -</b>	<b>7</b>	<b>U</b>	<b>N - X</b>	<b>0</b>	<b>T</b>	
Multi Layer	Case Size	Material System	Capacitance Code	Tolerance Level	Voltage Code	Termination Code	Leading Code	Test Level	Marking Code	Packaging

### Available Termination Types

C04	S
C06	U, S, Z
C07	U, S, Z
C08	U, S, Z
C11	U, S, Z
C17	U, S, Z

### Code Termination System

U	Ag Termination, Ni Barrier Layer, SnPb Plated Solder
S	Ag Termination, Ni Barrier Layer, Gold Flash, RoHS
Z	Ag Term., Ni Barrier Layer, Sn Plated Solder, RoHS

### Available Lead Types

C04	N
C06	N
C07	N
C08	N
C11	A, B, D
C17	A, B, C, D, E, F

### Test Level – All Case Sizes

X	Standard
Y	Reduced Visual
A	MIL-PRF-55681 Group A
C	MIL-PRF-55681 Group C
D	Customer Specified

### Available Laser Marking

C04	0
C06	0, 1, 2
C07	0, 1
C08	0, 1, 2
C11	0, 1, 2
C17	0, 1, 2

### Code Laser Marking

0	No marking
1	Single-side marked
2	Double-side marked
9	Customer Specified

### Available Packaging

C04	T, W, B, P, S
C06	T, W, B, P, S
C07	W, B, P, S
C08	T, V, W, B, P, S
C11	T, V, W, B, P, S
C17	T, V, W, B, P, S

### Code Packaging

T	Tape & Reel – Horizontal
V	Tape & Reel – Vertical
W	Waffle Pack
B	Bulk
P	Plastic Box
S	Customer Specified


\*See page 6 for complete part number system.

## Capacitance and Voltage Table


CAP CODE	CAP (pF)	CASE SIZE C04 0402	CASE SIZE C06 0603	CASE SIZE C07 0711	CASE SIZE C08 0805	CASE SIZE C11 0505	CASE SIZE C17 1111
0R1	0.1	200V Code 6 DWV = 500V	250V Code 9 DWV = 625V	500V Code 4 DWV = 1250V	250V Code 9 DWV = 625V	250V Code 9 DWV = 625V	1000V Code 7 DWV = 2500V
0R2	0.2						
0R3	0.3						
0R4	0.4						
0R5	0.5						
0R6	0.6						
0R7	0.7						
0R8	0.8						
0R9	0.9						
1R0	1.0						
1R1	1.1						
1R2	1.2						
1R3	1.3						
1R4	1.4						
1R5	1.5						
1R6	1.6						
1R7	1.7						
1R8	1.8						
1R9	1.9						
2R0	2.0						
2R1	2.1						
2R2	2.2						
2R4	2.4						
2R7	2.7						
3R0	3.0						
3R3	3.3						
3R6	3.6						
3R9	3.9						
4R3	4.3						
4R7	4.7						
5R1	5.1						
5R6	5.6						
6R2	6.2						
6R8	6.8						
7R5	7.5						
8R2	8.2						
9R1	9.1						
100	10						
110	11						
120	12						
130	13						
150	15						
160	16						
180	18						
200	20						
220	22						
240	24						
270	27						
300	30						
330	33						
360	36						
390	39						
430	43						
470	47						
510	51						
560	56						
620	62						
680	68						
750	75						
820	82						
910	91						
101	100						
111	110						
121	120						
151	150						
181	180						
221	220						
271	270						
331	330						
391	390						
471	470						
511	510						
561	560						
621	620						
681	680						
821	820						
911	910						
102	1000						
Reel QTY Horizontal		5000	4000	2350	5000	3500	2350

Special capacitance values available upon request.


**ESR vs Frequency**  
DLI C04 UL Series

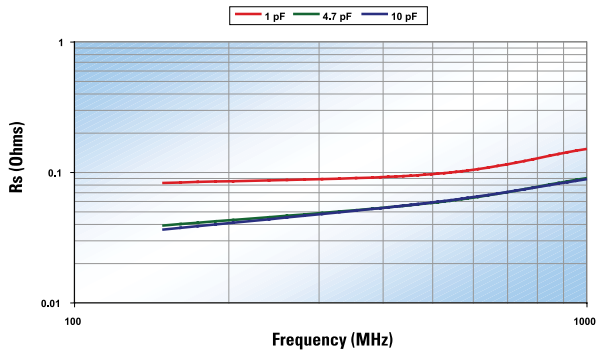


**Q vs Capacitance**  
DLI C04 UL Series

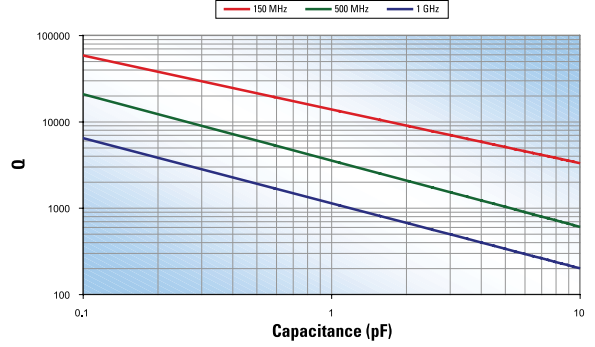


**ESR vs Frequency**  
DLI C06 UL Series

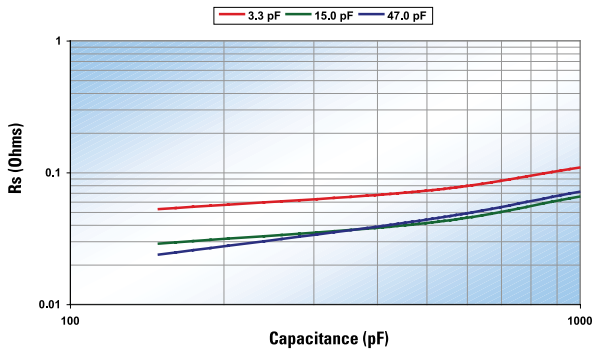


**Q vs Capacitance**  
DLI C06 UL Series

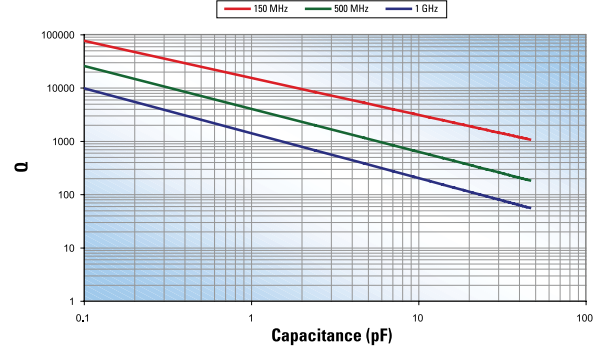


**ESR vs Frequency**  
DLI C07 UL Series

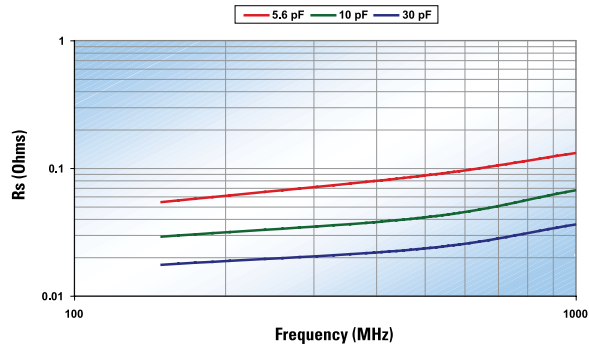


**Q vs Capacitance**  
DLI C07 UL Series

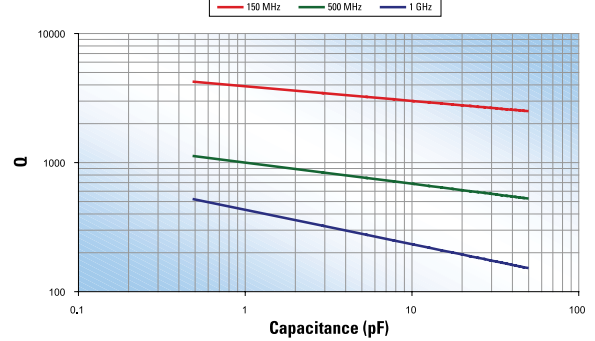

**ESR vs Frequency**  
DLI C08 UL Series

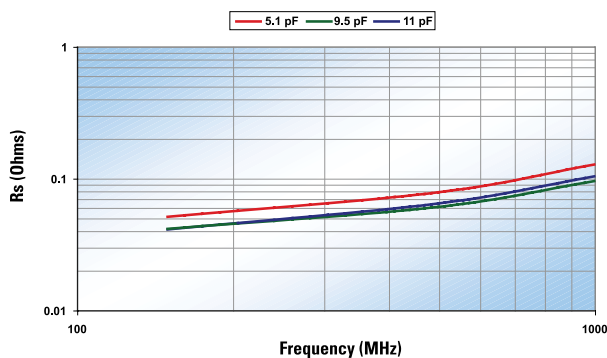


**Q vs Capacitance**  
DLI C08 UL Series

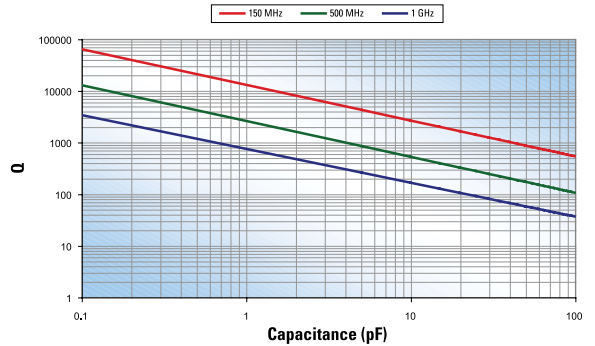


The information above represents typical device performance.


**ESR vs Frequency  
DLI C11 UL Series**

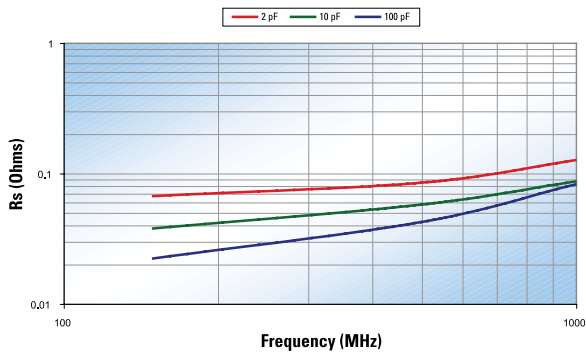


**Q vs Capacitance  
DLI C11 UL Series**

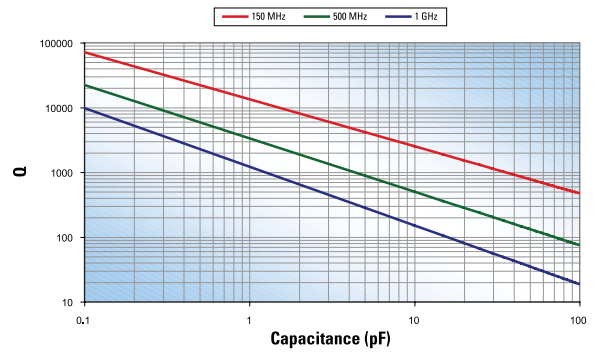


**ESR vs Frequency  
DLI C17 UL Series**

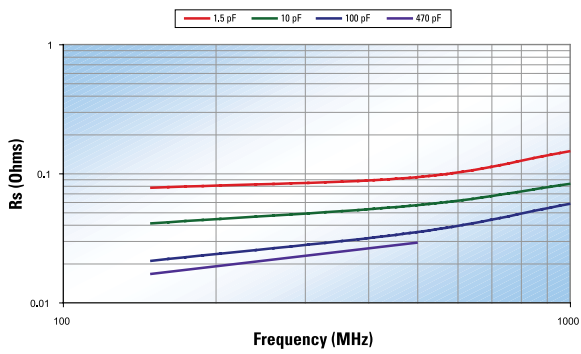


**Q vs Capacitance  
DLI C17 UL Series**

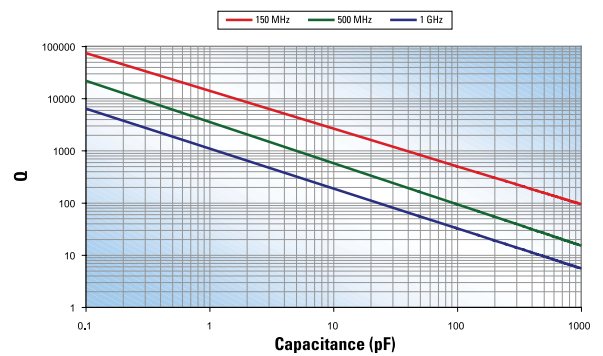


**Resonant Frequency vs Capacitance  
DLI C04 UL Series**

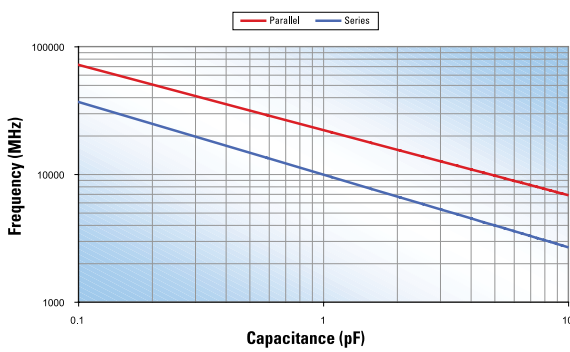


**Resonant Frequency vs Capacitance  
DLI C06 UL Series**

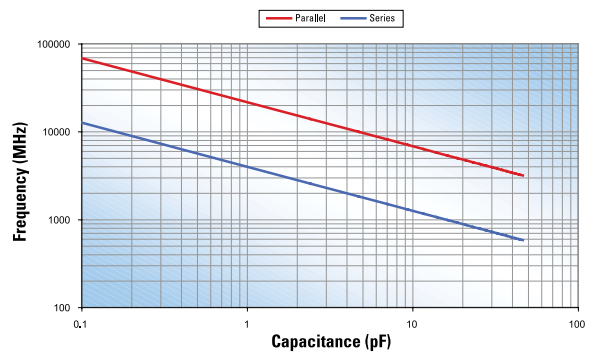

**Resonant Frequency vs Capacitance  
DLI C07 UL Series**

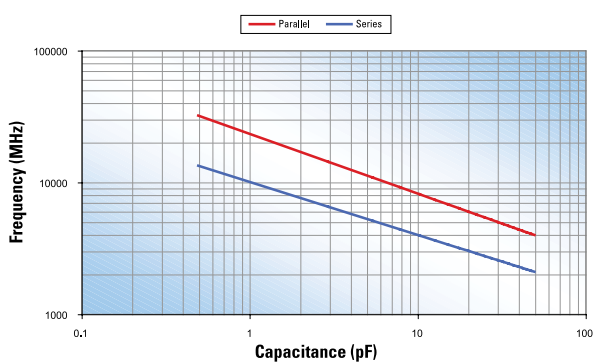


**Resonant Frequency vs Capacitance  
DLI C08 UL Series**

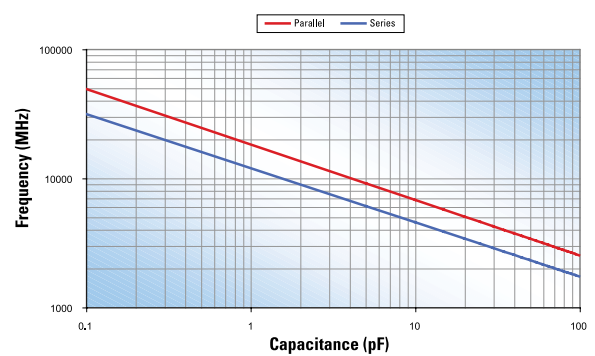


The information above represents typical device performance.

**Resonant Frequency vs Capacitance  
DLI C11 UL Series**

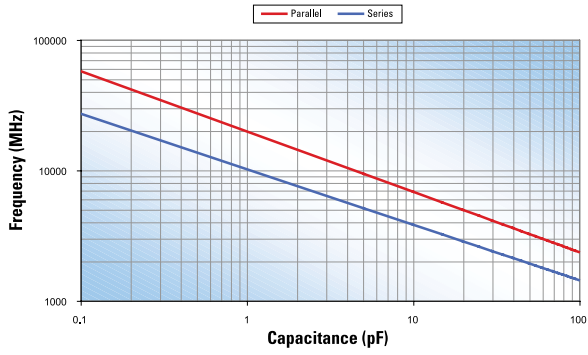

**Resonant Frequency vs Capacitance  
DLI C17 UL Series**

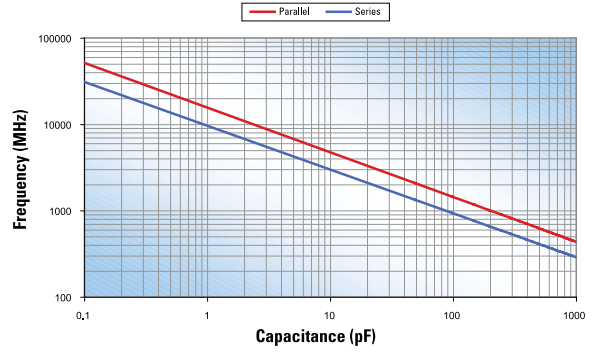

The information above represents typical device performance.



**C04 ENGINEERING KIT**

10 Pieces Each of 15 Values

Code	Cap
OR3	0.3pF
OR5	0.5pF
1R0	1.0pF
1R2	1.2pF
1R5	1.5pF
1R8	1.8pF
2R0	2.0pF
2R2	2.2pF
2R7	2.7pF
3R3	3.3pF
3R9	3.9pF
4R7	4.7pF
5R6	5.6pF
6R8	6.8pF
100	10pF
<b>C04 Broadband Block</b>	<b>120pF</b>

**C04 DESIGNER KIT**

10 Pieces Each of 8 Values

KIT C	KIT D	KIT E
OR1	OR9	3R9
OR2	1R0	4R7
OR3	1R2	5R1
OR4	1R5	5R6
OR5	1R8	6R8
OR6	2R2	8R2
OR7	2R7	9R1
OR8	3R3	100

**C06 ENGINEERING KIT**

10 Pieces Each of 21 Values

Code	Cap
OR3	0.3pF
OR5	0.5pF
1R0	1.0pF
1R2	1.2pF
1R5	1.5pF
1R8	1.8pF
2R0	2.0pF
2R2	2.2pF
2R7	2.7pF
3R3	3.3pF
3R9	3.9pF
4R7	4.7pF
5R6	5.6pF
6R8	6.8pF
100	10pF
150	15pF
180	18pF
220	22pF
270	27pF
330	33pF
470	47pF
<b>C06 Broadband Block</b>	<b>850pF</b>

**C06 DESIGNER KIT**

10 Pieces Each of 10 Values

KIT C	KIT D	KIT E
OR1	1R2	6R8
OR2	1R5	8R2
OR3	1R8	9R1
OR4	2R2	100
OR5	2R7	120
OR6	3R3	150
OR7	3R9	220
OR8	4R7	270
OR9	5R1	360
1R0	5R6	470

**C11 ENGINEERING KIT**

10 Pieces Each of 28 Values

Code	Cap
OR3	0.3pF
OR5	0.5pF
OR7	0.7pF
1R0	1.0pF
1R2	1.2pF
1R5	1.5pF
1R8	1.8pF
2R0	2.0pF
2R2	2.2pF
2R7	2.7pF
3R3	3.3pF
3R9	3.9pF
4R7	4.7pF
5R6	5.6pF
6R8	6.8pF
8R2	8.2pF
100	10pF
120	12pF
150	15pF
180	18pF
270	27pF
330	33pF
390	39pF
470	47pF
560	56pF
680	68pF
820	82pF
101	100pF
<b>C08 Broadband Block</b>	<b>2400pF</b>

**C11 DESIGNER KIT**

10 Pieces Each of 10 Values

KIT C	KIT D	KIT E	KIT F
OR1	1R0	5R6	270
OR2	1R2	6R8	330
OR3	1R5	8R2	390
OR4	1R8	100	470
OR5	2R2	120	510
OR6	2R7	150	560
OR7	3R3	180	620
OR8	3R9	220	680
OR9	4R7	270	820
1R0	5R1	330	101

**C17 ENGINEERING KIT**

10 Pieces Each of 35 Values

Code	Cap
OR3	0.3pF
OR5	0.5pF
OR7	0.7pF
1R0	1.0pF
1R2	1.2pF
1R5	1.5pF
1R8	1.8pF
2R0	2.0pF
2R2	2.2pF
2R7	2.7pF
3R3	3.3pF
3R9	3.9pF
4R7	4.7pF
5R6	5.6pF
6R8	6.8pF
8R2	8.2pF
100	10pF
120	12pF
150	15pF
180	18pF
220	22pF
270	27pF
330	33pF
390	39pF
470	47pF
560	56pF
680	68pF
820	82pF
101	100pF
151	150pF
221	220pF
331	330pF
471	470pF
681	680pF
102	1000pF
<b>C08 Broadband Block</b>	<b>2400pF</b>

**C17 DESIGNER KIT**

10 Pieces Each of 10 Values

KIT C	KIT D	KIT E	KIT F
OR1	1R0	5R6	390
OR2	1R2	6R8	470
OR3	1R5	8R2	560
OR4	1R8	100	680
OR5	2R2	120	820
OR6	2R7	150	101
OR7	3R3	180	221
OR8	3R9	220	471
OR9	4R7	270	681
1R0	5R1	330	102



DLI reserves the right to substitute values as required. Customers may request particular cap value and material for sample kit to prove out designs. Custom kits available upon request.


# C04/C06/C08 Broadband Blocks

## Functional Applications


Fiber Optic Links, High Isolation Decoupling, LAN's, VCO Frequency Stabilization, Duplexers, RF/Microwave Modules, Instruments and Test Equipment.

## Benefits

Resonance free DC Blocking / Decoupling, Less than 0.25 db loss @ 4 GHz (typical), Surface mountable

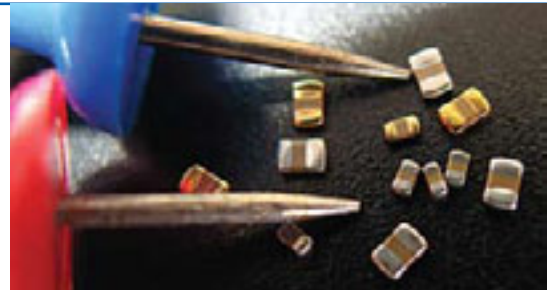

## Mechanical Specification

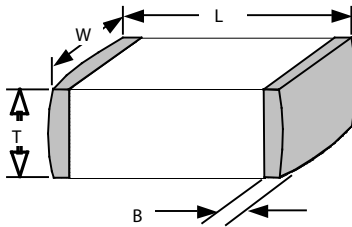


Product Code	Body Dimensions			Band Dimensions (B)	
	Length (L)	Width (W)	Thickness (T)	Min	Max
C04BL	0.040" ± 0.008"	0.020" ± 0.006"	0.028" Max	0.003"	0.019"
C06BL	0.060" ± 0.012"	0.031" ± 0.009"	0.036" Max	0.006"	0.03"
C08BL	0.081" ± 0.020"	0.051" ± 0.013"	0.061" Max	0.012"	0.0468"

## Part Characteristics


Part Number	Capacitance Guaranteed Minimum Value	Voltage Rating	Temperature Coefficient -55°C to 125°C	Maximum Dissipation Factor	Insulation Resistance (MΩ Minimum)	Aging Rate	Frequency Range	Termination
C04BL121X-5UN-X0T	120pF @ 1KHz, 2Vrms	50 Vdc	± 15%	3.0% @ 1KHz, 2Vrms	10 <sup>4</sup>	<=1.5% / decade hours	10MHz – 40GHz	"U" & "S"
C06BL851X-1UN-X0T	850pF @ 1KHz, 2Vrms	100 Vdc					2MHz – 30GHz	"U", "S" & "Z"
C08BL242X-5UN-X0T	2400pF @ 1KHz, 2Vrms	50 Vdc					1MHz – 20GHz	"U", "S" & "Z"
C08BL102X-1UN-X0T	1000pF @ 1KHz, 2Vrms	100 Vdc					1MHz – 20GHz	"U", "S" & "Z"

## Performance


C08BL242X-5UN-X0T Insertion Loss (S21)

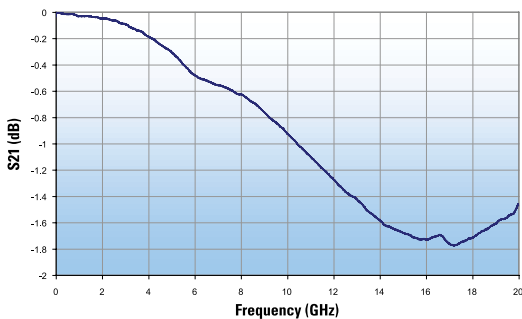


C06BL851X-1UN-X0T Insertion Loss (S21)

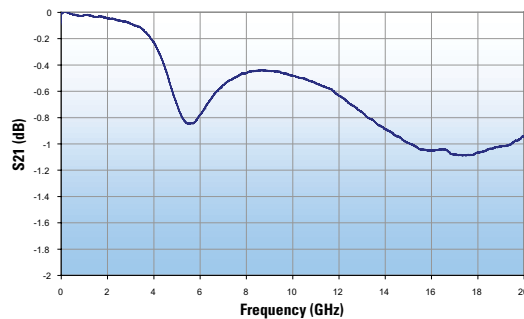

High Q & Broadband MLC Compared Insertion Loss (S21)

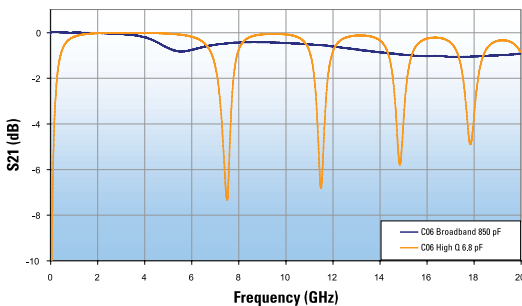

C04BL121X-5UN-X0T Insertion Loss (S21)

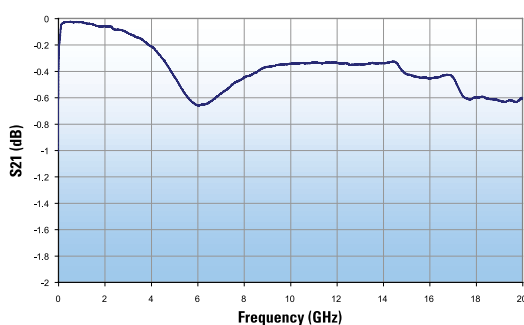

The information above represents typical device performance.

### Functional Applications

- Improved Low Frequency Stability over Temperature
- Very Low Series Inductance
- X7R Temperature and Voltage Stability

### Benefits

- Resonance Free DC Blocking to >40GHz
- Surface Mountable by Solder or Epoxy Bonding
- Available in Tape & Reel or Waffle Pack Format
- Improved Low Frequency Stability over Temperature



### Opti-Cap™ Electrical Characteristics

Part Number (Includes T&R)	Capacitance/MLC Case Size	Voltage Rating	Temperature Coefficient	IR (@+20°C, Rated Voltage)	Max DF 1kHz	Aging Rate (% per Decade Hour Max)	Term	Frequency 3dB pts. Typical	Max Process Temperature Recommended Attachment Method
P62BN820MA2636	100 nF / 0603	25 Vdc	X7R ΔC max: ±15% (-55°C to 125°C)	10 <sup>2</sup> MΩ	3.0%	1.0%	Au (Flash)	16 KHz >>40 GHz	250°C/ Conductive Epoxy or Solder
P42BN820MA3152	220 nF / 0402	10 Vdc	X5R ΔC max: ±15% (-55°C to 85°C)	10 <sup>2</sup> MΩ	3.5%	1.0%	Au (Flash)	16 KHz >>40 GHz	250°C/ Conductive Epoxy or Solder
P21BN300MA3976	10 nF / 0201	10Vdc	X5R ΔC max: ±15% (-55°C to 85°C)	10 <sup>2</sup> MΩ	3.5%	1.0%	Au (Flash)	16 KHz >>40 GHz	250°C/ Conductive Epoxy or Solder


#### Notes:

1. Termination Metalization: 7.5 ± 4.5 micro inches Au over 50 microinches Ni min.
2. Maximum assembly process temperature: 250°C
3. For best high frequency performance, attach surface A to transmission line. For 50 ohm system, transmission line should be near or slightly greater than 20 mils. Recommended microstrip gap length is 0.015 inch.
4. Rated working voltage (WVDC) is the lesser of 25 volts (Milli.) or multilayer WVDC from Table B.
5. Recommended attachment is solder or conductive epoxy.

#### Broadband Kit


Part Number	Freq Range
P62BN820MA2636	
P02BN820Z5S	20MHz - 40GHz
P02CG1R5C5S	8GHz - 32GHz
P02CG1R0C5S	18GHz - 40GHz
P02CF0R5B5S	28GHz - 40GHz
P02CF0R3B5S	35GHz - 50GHz
C06BL851X-1UN-X0B	2MHz - 30GHz
C08BL242X-5UN-X0B	1MHz - 20GHz

### Physical Characteristics

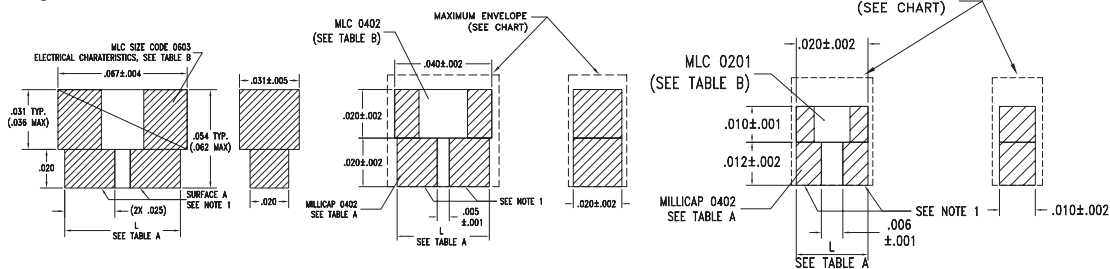


### Electrical Characteristics

Opti-Cap Insertion & Return Loss, (S21 & S11)  
P02BN820MA2636

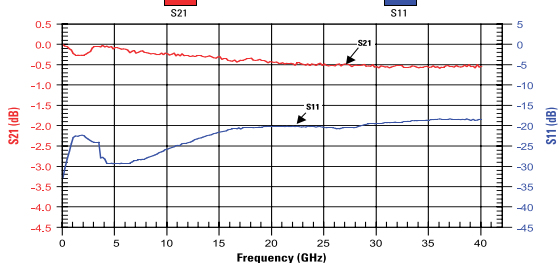

Opti-Cap Low Frequency Insertion Loss, (S21)  
P02BN820MA2636

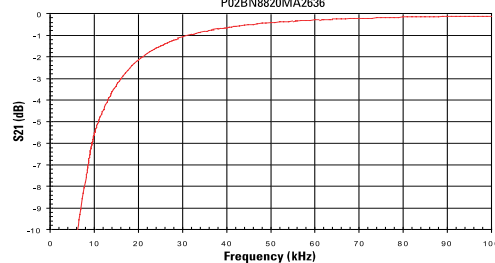

# Milli-Cap® SMD Millimeter Wave Capacitor


## Functional Applications

0402, 0502 and 0602 Footprints, Very Low Series Inductance, Ultra High Series Resonance, Low Loss High Q part.

## Benefits

Matches typical 50Ω Line Widths, Preserves Board Space, Behaves Like An Ideal Capacitor, More Usable Bandwidth

## Mechanical Specification

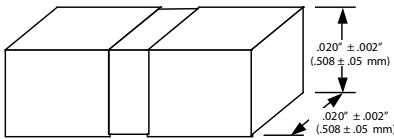

- Terminations: Gold
- Assembly temperatures not to exceed 260°C.
- Ideal for Test Equipment, Photonics, SNET, Digital radios, and Matching Filter applications







## Part Characteristics

Part Number	Cap.	Voltage Rating	Temperature Coefficient -55°C to 125°C	Maximum Dissipation Factor	Insulation Resistance (MΩ Minimum)	Aging Rate	Frequency Range
P_2BN820Z5ST	82 pF	50 Vdc	± 10%	3.0% @ 1MHz, 25°C	10 <sup>5</sup> MΩ @ 25°C at rated voltage	<=1.5%/decade hours	20MHz– 40GHz
P_2NR3R0K5ST	3.0 pF		N1500 ±500PPM / °C	0.25% @ 1MHz, 25°C			4–20GHz
P_2CG1R5C5ST	1.5 pF		0 ± 30PPM	0.7% @ 1KHz, 25°C			8–32GHz
P_2CG1R0C5ST	1.0 pF		N20 ±15PPM / °C	0.15% @ 1MHz, 25°C			18–40GHz
P_2CD0R7B5ST	0.7 pF						20–46GHz
P_2CF0R5B5ST	0.5 pF						28–40GHz
P_2CF0R3B5ST	0.3 pF		0 ±15PPM / °C	0.6% @ MHz, 25°C			35–50GHz

Dimensions Key: P42 = 0402; P02 = 0502; P62 = 0602

## Electrical Performance

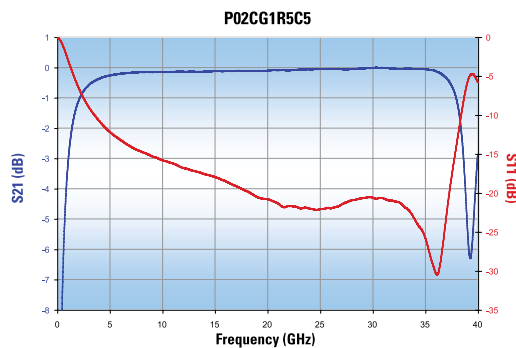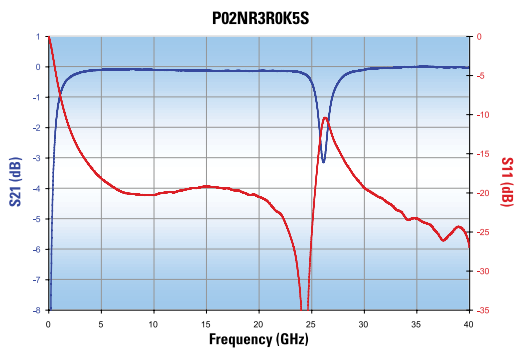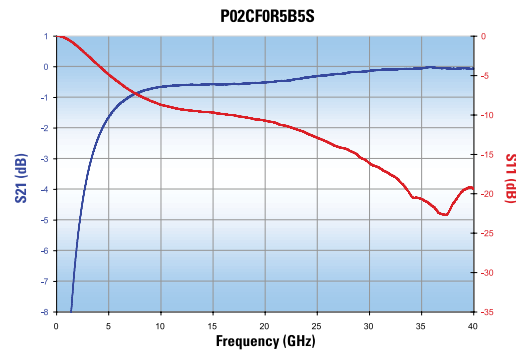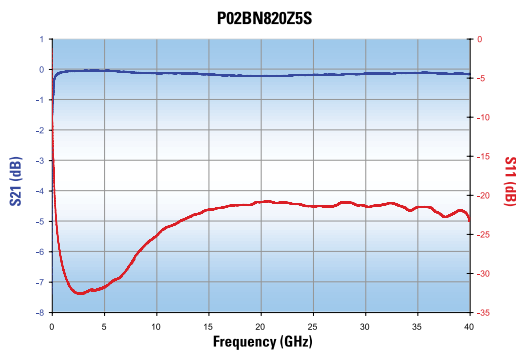

The information above represents typical device performance.


DLI's new web based CapCad™ capacitor modeling software was developed to provide customers with an easy to use and readily accessible comparison tool for choosing the best Single-Layer, Multi Layer or Broadband Blocking capacitor to suit the customer's needs. CapCad™ includes SPICE models with values that reflect typical performance at the chosen frequencies and temperatures that are of importance to an application. The user also has the ability to plot 2-port Scattering Parameters, Impedance, Q Factor or Equivalent Capacitance over any frequency span from 1 MHz to 40 GHz while maintaining the ability

to adjust the temperature and note how it may affect the performance. CapCad™ also includes a Smith Chart utility and the ability to copy the S-Parameter data in touchtone format(s2p).

The data presented by CapCad™ is based off of calculated models and is a representation of typical performance. It should not be construed as a specification or guarantee of performance. Actual performance may vary slightly from application to application. For more info or support please feel free to contact us by phone at (315) 655-8710, or by email at sales@dilabs.com .

### Multilayer Capacitors (DC Blocks)

Part Number: **C04 BL 121 X - 5 S N - S**

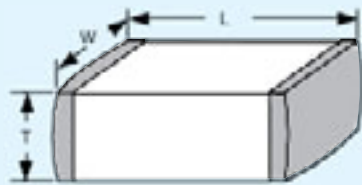

Size = 04  
 W =  $0.051 \pm 0.006$   
 L =  $0.040 \pm 0.008$   
 T = 0.000 Max  
 ● in. ○ mm

Material = BL  
 Class/TC = 1/±15%  
 Cap (pF) = 120  
 Voltage = 50  
 Tolerance = X: GMV  
 Termination = S: Standing Axial Beam Lead  
 Leading = N: None  
 Test Code = S: Special


#### Functional Applications

Broadband Fiber Optic Links, LAN's, Broadband and RF/Microwave Modules, Broadband High Isolation Decoupling, Broadband Instrumentation and Test Equipment


#### Benefits

Resonance Free DC Blocking from 1 MHz to 20 GHz, Surface Mountable 0805 Case Size for Edge Mounting on 25mil Microstrip


#### Graphing Links



Series




Shunt



T-Line



**AH Series:**  
P90 Porcelain Capacitors



**CF Series:**  
Ultrastable Porcelain Capacitors



**NA Series:**  
N30 Porcelain Capacitors



**C04/C06/C08**  
Broadband Blocks

## Single Layer Capacitors

Di-Cap®	Border Cap®	Gap Cap	Bar Cap®	Binary Cap	T-Cap®
Highest performance SLC for RF, MW and MMW applications from 100 MHz to 100 GHz. Most cap for size 0.02 – 4300 pF	SLC w 1- or 2-sided recessed metallization to minimize the potential for shorting during die attach. Ideal for epoxy attach. 0.02 – 1500 pF	Series configured precision SLC for elimination of wire-bonds and microstrip applications. Minimum performance variation.	Multiple decoupling/ bypass or blocking SLC configured in a single array. 1-13 GHz. Ideal for decoupling MMICs.	Multi-value – binary tunable SLC for design tuning or MIC hybrids.	DiCap® SLC used in series connected open circuited transmission line- designed for repeatable resonance behavior.

## Filters/Heat Sinks/Sub Mounts/Standoffs

Filter Family	Bias Filter Network	Heatsinks, Sub Mounts and Standoffs	Build to Print
Micro-strip, cavity filters, duplexers, diplexers, GPS filters. Frequency from 500 MHz to 67 GHz. No tuning required, extremely temperature stable, miniature and lightweight. Customized designs and prototypes.	Designed to filter RF signals from bias and control line from 10MHz to 40GHz. Reduces RF feedback through bias supplies and simplifies assembly – one component replaces many.	For laser diodes, VCSEL, and others for the fiber optics industry. DLI can customize a design for high volume and be very price competitive. The next generation of “smart” heatsinks are also available using proprietary technologies.	DLI maintains an inventory of industry standard ceramics and manufactures a large selection of proprietary and/or patented custom ceramics. Plus, DLI’s custom ceramics can offer significantly better thermal performance than the majority of industry standard ceramics and have the added benefit of a sufficiently higher K allowing miniaturization opportunities.

## Equalizers/Duplexers/Resonators

Gain Equalizer	Duplexers and Diplexers	Cavity Resonator
Excellent, repeatable microwave performance is achieved by application of precision thin film fabrication and DLI HI-K ceramic materials. DLI’s unique design solution provides near ideal R-C frequency response, far superior to “Stacked R-C chip” assemblies. RADAR application to 67 GHz.	Duplexers are three port devices used to separate and combine frequencies, having two filters with a common driving point covering two frequency bands. Diplexers are three port devices used to separate and combine frequencies, having one filter covering all frequency bands.	DLI’s Cavity Resonators set a new standard for high Q resonator performance across a broad spectrum of frequencies. High Q resonators play a critical role in system noise performance, and employing the advantage is dramatically easier and less expensive than ever before. These products include extremely stable Single Frequency Cavity Resonators (SFCR), Narrow-Band and Wide-Band Tunable Ceramic Resonator, and Two-Port Resonators. Single Frequency Cavity Resonators-standard from 3GHz to >67GHz. Two Port Cavity Resonators-standard from 3GHz to >67GHz.

## Substrates

DLI manufactures and/or procures substrates to allow our customers to manufacture their own custom ceramic products\*. DLI’s proprietary and/or patented ceramics offer high K values, to allow for miniaturization, extreme temperature stability, space reliability and radiation hardened properties. As a direct result of the above, DLI is able to offer our customers a complete array of fabrication services for all industry standards and/or custom ceramics.

\*DLI does restrict certain proprietary materials in specific applications for internal use only.



**BSC Filters Ltd,**  
Jorvik House, Outgang Lane, Osbaldwick, York YO19 5UP UK

Phone: +44 1904 438438  
Fax: +44 1904 438123  
Email: sales@bscfilters.com

**Dielectric Laboratories, Inc**  
2777 Route 20 East, Cazenovia, NY 13035 USA

Phone: +1 315 655 8710  
Fax: +1 315 655 0445  
Email: sales@dilabs.com

**Dow-Key Microwave**  
4822 McGrath Street, Ventura, CA 93003 USA

Phone: +1 805 650 0260  
Fax: +1 805 650 1734  
Email: askdk@dowkey.com

**K&L Microwave**  
2250 Northwood Drive, Salisbury, MD 21801 USA

Phone: +1 410 749 2424  
Fax: +1 443 260 2268  
Email: sales@klmicrowave.com

**Novacap**  
25111 Anza Drive, Valencia, CA 91355 USA

Phone: +1 661 295 5920  
Fax: +1 661 295 5928  
Email: info@novacap.com

**Pole/Zero Corporation**  
5558 Union Centre Drive, West Chester, OH 45069 USA

Phone: +1 513 870 9060  
Fax: +1 513 870 9064  
Email: support@polezero.com

**Syfer Technology Limited**  
Old Stoke Road, Arminghall, Norwich, NR14 8SQ UK

Phone: +44 1603 723300  
Fax: +44 1603 723301  
Email: sales@syfer.co.uk

**Voltronics Corporation**  
100-10 Ford Road, Denville, NJ 07834 USA

Phone: +1 973 586 8585  
Fax: +1 973 586 3404  
Email: info@voltronicscorp.com



[www.dovercmp.com](http://www.dovercmp.com)

Ceramic & Microwave Products (CMP) designs, manufactures and sells special electronic components and systems, including high-performance filters, switches, capacitors and EMI and cosite signal interference solutions. Our products are used in military, space, telecom infrastructure, medical and industrial applications where function and reliability are crucial.



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Knowles:](#)

[C08UL101J-8ZN-X0T](#)