

SBD

Schottky Barrier Diode, 100V, 2×5A


Description:

These diodes are optimized to get low forward voltage and low reverse leakage current. These devices are suited for high frequency switched mode power supplies.

Features:

- High ESD capability
- 150°C operating junction temperature
- High frequency operation
- Low IR value
- High surge capacity

Product Summary	
V_R	100 V
$I_{F(AV)}$	2×5 A



Applications:

- Switched mode power supply

Absolute Maximum Ratings						
Parameter	Symbol	Test Conditions	Values			Units
Repetitive peak reverse voltage	V _{RRM}		100			V
Continuous forward current	I _{F(AV)}	T _A =110°C	10			A
Single pulse forward current	I _{FSM}	T _A =25°C	150			A
Maximum repetitive forward current	I _{FRM}	Square wave, 20kHz	25			A
Operating junction	T _j		150			°C
Storage temperatures	T _{stg}		-55 to +150			°C
Electrical characteristics (T _a =25 °C unless otherwise specified)						
Parameter	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Breakdown voltage	V _{BR}	I _R =100μA	100			V
Blocking voltage	V _R					
Forward voltage	V _F	I _F =3A		0.73	0.80	V
		I _F =5A		0.78	0.83	
		I _F =3A, T _j =125°C		0.60	0.70	
		I _F =5A, T _j =125°C		0.63	0.73	
Reverse leakage current	I _R	V _R = V _{RRM}			10	μA
		T _j =125 °C, V _R =100V			2000	μA
Thermal characteristics						
Parameter	Symbol	Typ	MAX			Units
Junction-to-Case	R _{thJC}	-	4.2			°C/W

Typical Characteristics

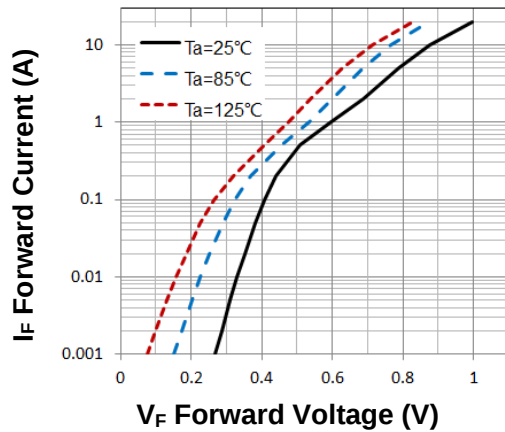


Figure 1. Forward Characteristic (typ.)


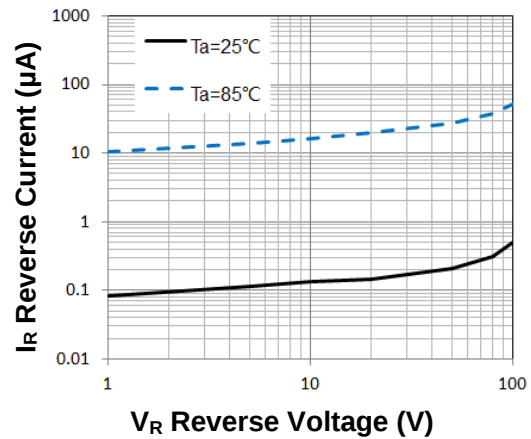


Figure 2. Reverse Characteristic (typ.)

Package Information

TO-220F PACKAGE

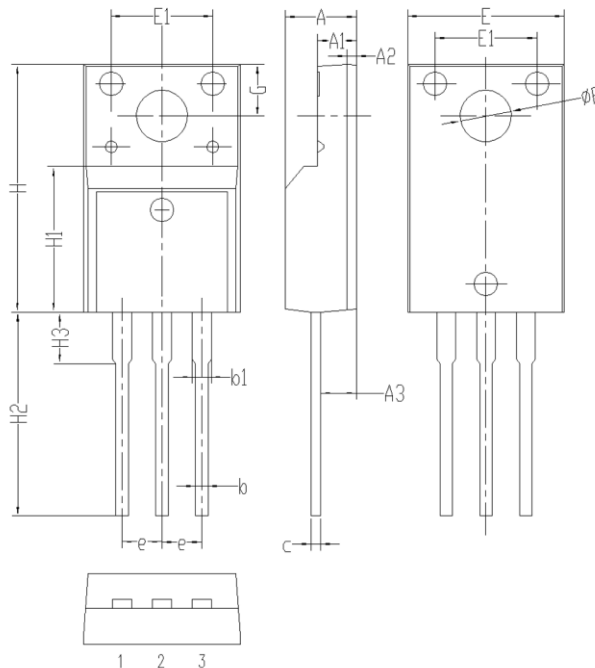

Symbol	Dimensions (millimeters)	
	Min.	Max.
A	4.60	5.00
A1	2.40	2.80
A2	0.60	1.00
A3	2.50	2.90
b	0.70	0.90
b1	1.20	1.60
c	0.40	0.60
e	2.34	2.74
E	9.85	10.45
E1	6.80	7.20
H	15.80	16.20
H1	9.00	9.40
H2	12.70	13.30
H3	3.10	3.50
G	2.80	3.20
ΦP	3.00	3.40

Notice:

1. WXQZ reserves the right to make changes without notice in order to improve reliability, function or design and to discontinue any product or service without notice.
2. Customers should obtain the latest relevant information before orders and should verify that such information is current and complete.
3. All products are sold subject to WXQZ's terms and conditions supplied at the time of order acknowledgement.
4. WXQZ does not assume any liability arising from the use of any product or circuit designs described herein. Customers are responsible for their products and applications using WXQZ's components. To minimize risk, customers must provide adequate design and operating safeguards.